

Allied Vision Prosilica GE



Technical Manual

GigE Vision Cameras

V2.1.0

20 March 2015

Allied Vision Technologies GmbH
Taschenweg 2a
D-07646 Stadtroda, Germany



Allied Vision

Legal notice

For customers in the U.S.A.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interferences will not occur in a particular installation. If the equipment does cause harmful interference to radio or television reception, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and the receiver.
- Use a different line outlet for the receiver.
- Consult a radio or TV technician for help.

You are cautioned that any changes or modifications not expressly approved in this manual could void your authority to operate this equipment. The shielded interface cable recommended in this manual must be used with this equipment in order to comply with the limits for a computing device pursuant to Subpart A of Part 15 of FCC Rules.

For customers in Canada

This apparatus complies with the Class A limits for radio noise emissions set out in the Radio Interference Regulations.

Pour utilisateurs au Canada

Cet appareil est conforme aux normes classe A pour bruits radioélectriques, spécifiées dans le Règlement sur le brouillage radioélectrique.

Life support applications

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Allied Vision Technologies customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Allied Vision Technologies for any damages resulting from such improper use or sale.

Trademarks

Unless stated otherwise, all trademarks appearing in this document of Allied Vision Technologies are brands protected by law.

Warranty

The information provided by Allied Vision Technologies is supplied without any guarantees or warranty whatsoever, be it specific or implicit. Also, excluded are all implicit warranties concerning the negotiability, the suitability for specific applications or the non-breaking of laws and patents. Even if we assume that the information supplied to us is accurate, errors and inaccuracy may still occur.

Copyright

All texts, pictures and graphics are protected by copyright and other laws protecting intellectual property. It is not permitted to copy or modify them for trade use or transfer, nor may they be used on websites.

Allied Vision Technologies GmbH 03/2015

All rights reserved.

Managing Director: Mr. Frank Grube

Tax ID: DE 184383113

Headquarters:

Taschenweg 2a

D-07646 Stadtroda, Germany

Tel: +49 (0)36428 677-0

Fax: +49 (0)36428 677-28

e-mail: info@alliedvision.com

Contents

Contacting Allied Vision	5
Introduction	6
Document history	6
Manual conventions	8
Styles	8
Symbols	8
Precautions	9
Cleaning optics	9
Identifying debris	10
Locating debris	10
Color cameras with IR filter	10
Cleaning with air	10
Contact cleaning	11
Conformity	12
Specifications	13
Prosilica GE680/680C	13
Prosilica GE1050/1050C	15
Prosilica GE1650/1650C	17
Prosilica GE1660/1660C	19
Prosilica GE1900/1900C	21
Prosilica GE1910/1910C	23
Prosilica GE2040/2040C	25
Prosilica GE4000/4000C	27
Prosilica GE4900/4900C	29
Camera attribute highlights	31
Filters	32
Camera dimensions	33
Prosilica GE C-Mount (adjustable): GE680/680C	33
Prosilica GE C-Mount (adjustable)	34
Prosilica GE F-Mount: GE2040/2040C	35
Prosilica GE large format F-Mount: GE4000/4000C, GE4900/4900C	36
Tripod adapter	37
C-Mount flange focal distance	38
Adjustment of C-Mount	38
Lens protrusion for C-Mount cameras	39
F-Mount flange focal distance	40
Adjustment of F-Mount	40

Camera interfaces	41
Status LEDs	41
Gigabit Ethernet port	42
Camera I/O connector pin assignment	43
I/O definition	44
Camera power	44
Isolated IO GND	44
RxD RS-232 and TxD RS-232	44
Input triggers	44
Output signals.....	45
Video iris.....	46
Reserved	46
Camera I/O connector internal circuit diagram	47
Camera I/O connector external circuit example	48
In 1, Out 1 external circuit example	49
Trigger timing diagram.....	50
Notes on triggering	50
Firmware update	52
Resolution and ROI frame rates	53
Prosilica GE680	53
Prosilica GE1050	54
Prosilica GE1650	54
Prosilica GE1660	55
Prosilica GE1900	55
Prosilica GE1910	56
Prosilica GE2040	56
Prosilica GE4000	57
Prosilica GE4900	57
Prosilica GE model comparison	58
Camera data path	59
Prosilica GE: monochrome cameras	59
Prosilica GE: color cameras.....	59
Additional references	60
Index	61

Contacting Allied Vision

Info



- **Technical information:**
<http://www.alliedvision.com>
- **Support:**
support@alliedvision.com

Allied Vision Technologies GmbH (Headquarters)

Taschenweg 2a
07646 Stadtroda, Germany
Tel.: +49 36428-677-0
Fax: +49 36428-677-28
e-mail: info@alliedvision.com

Allied Vision Technologies Canada Inc.

101-3750 North Fraser Way
Burnaby, BC, V5J 5E9, Canada
Tel.: +1 604-875-8855
Fax: +1 604-875-8856
e-mail: info@alliedvision.com

Allied Vision Technologies Inc.

38 Washington Street
Newburyport, MA 01950, USA
Toll Free number +1 877-USA-1394
Tel.: +1 978-225-2030
Fax: +1 978-225-2029
e-mail: info@alliedvision.com

Allied Vision Technologies Asia Pte. Ltd.

82 Playfair Road
#07-02 D'Lithium
Singapore 368001
Tel.: +65 6634-9027
Fax: +65 6634-9029
e-mail: info@alliedvision.com

Allied Vision Technologies (Shanghai) Co., Ltd.

2-2109 Hongwell International Plaza
1602# ZhongShanXi Road
Shanghai 200235, China
Tel.: +86 (21) 64861133
Fax: +86 (21) 54233670
e-mail: info@alliedvision.com

Introduction

This **Prosilica GE Technical Manual** describes in depth the technical specifications of the Prosilica GE camera family including dimensions, feature overview, I/O definition, trigger timing waveforms, and frame rate performance.

For information on software installation read the **GigE Installation Manual**. For detailed information on camera features and controls specific to the Prosilica GE refer to the **GigE Features Reference** and **GigE Camera and Driver Attributes** documents.

www



Prosilica GE literature:

<http://www.alliedvision.com/en/support/technical-documentation/prosilica-ge-documentation>

Document history

Version	Date	Remarks
V2.0.0	2011-Jul-14	New Manual - SERIAL status
V2.0.1	2013-Jul-05	<ul style="list-style-type: none"> Renamed Camera IO signals Reworked Cleaning optics section Reworked the spectral plots and Frame rate vs.Height graphs Updated the RoHS directive Updated the exposure control values in the Specifications chapter Added Status LEDs section Updated the pixel format naming according to the GenICam naming convention Added frame rate formulas in the Resolution and ROI frame rates chapter Added VIMBA SDK link in Additional references section Updated AVT recommended cabling to category 6 or higher in the Gigabit Ethernet port section Added contact information for Allied Vision Technologies (Shanghai) Co. Ltd. Updated the links to AVT GigE Installation Manual Added links to AVT GigE Camera and Driver Features document
to be continued on next page		

Table 1: Document history

Version	Date	Remarks
continued from last page		
V2.0.2	2013-Oct-02	<ul style="list-style-type: none"> • Added optical flange focal distance and maximum lens protrusion information on page 37 • Added a note on locking screw cables on page 41 • Updated Cleaning optics section • Updated vertical binning values in the Specifications chapter • Updated Table 12 on page 31 • Updated links for AVT PvAPI SDK
V2.0.3	2013-Nov-26	<ul style="list-style-type: none"> • Added chapter Description of the data path on page 58 • Updated the Index
V2.0.4	2014-Oct-15	<ul style="list-style-type: none"> • Replaced the optical flange focal distance section with the following sections: <ul style="list-style-type: none"> – C-Mount flange focal distance – F-Mount flange focal distance • Added description of power barrel connector on page 44 • Updated datapath diagram for Prosilica GE: color cameras • Added Prosilica GE C-Mount (adjustable): GE680/680C • Updated Prosilica GE tripod mount mechanical drawing • Truesense references renamed to OnSemi
V2.1.0	2015-Mar-20	<ul style="list-style-type: none"> • Updated Allied Vision logo • Replaced old links with new Allied Vision website links • Changed file name from 'GigE Camera and Driver Features' to 'GigE Features Reference' • Changed chapter name from 'Description of data path' to 'Camera data path'

Table 1: Document history

Manual conventions

To give this manual an easily understandable layout and to emphasize important information, the following typographical styles and symbols are used:

Styles

Style	Function	Example
Bold	Programs, inputs, or highlighting important information	bold
Courier	Code listings etc.	Input
Upper case	Register	REGISTER
Italics	Modes, fields	<i>Mode</i>
Parentheses and/or blue	Links	(Link)

Table 2: Styles

Symbols

Note This symbol highlights important information.



Caution This symbol highlights important instructions. You have to follow these instructions to avoid malfunctions.



www This symbol highlights URLs for further information. The URL itself is shown in blue.



Example:

<http://www.alliedvision.com>

Precautions

Caution

Do not disassemble the camera housing. Warranty is void if camera has been disassembled.

This camera contains sensitive internal components.

Caution

Keep shipping material.

Poor packaging of the product may cause damage during shipping.

Caution

Verify all external connections.

Verify all external connections in terms of voltage levels, power requirements, voltage polarity, and signal integrity prior to powering the device.

Caution

Cleaning.

This product can be damaged by some volatile cleaning agents. Avoid cleaning the image sensor unless absolutely necessary. Please see instructions on optics cleaning in this document.

Caution

Do not exceed environmental specifications.

See environmental specifications limits in the [Specifications](#) chapter of this document. Special care must be taken to maintain a reasonable operating temperature. If the camera is operated in temperatures higher than the specified range, the camera should be mounted on a heat sink.

Cleaning optics

Caution

Allied Vision does not warranty against any physical damage to the sensor/filter/protection glass or lenses. **Use utmost care when cleaning optical components.**

Caution

Do not touch any optics with fingers. Oil from fingers can damage fragile optical coatings.

**Identifying debris**

Debris on the image sensor or optical components appears as a darkened area or smudge on a camera image. Do not confuse this with a pixel defect which appears as a distinct point.

Locating debris

First determine whether the debris is on the sensor glass, IR filter (if used), or lens. The farther away the debris is from the sensor, the blurrier the debris appears on a camera image.

Stream a live image from the camera using a uniform target, such as a piece of paper. To determine if the debris is on the camera lens, rotate the lens independent of the camera. If the spot moves, the debris is on the lens. Otherwise, the debris is on the IR filter (if used) or sensor glass.

Color cameras with IR filter

Prosilica GE color cameras are equipped with an IR filter. With no lens or lens cap on a camera, the IR filter is exposed and debris can accumulate on it. This is the most probable location for debris. It should not be necessary to remove the IR filter for cleaning. Clean the outside of the IR filter glass using the techniques explained in the next section.

If it is determined that the debris is on the inside surface of the filter glass, or on the sensor glass, IR filter removal is necessary. Depending on the manufacturing date of your Prosilica GE camera, the IR filter may be slot type, or pinhole type. Slot type filters can be removed using a small flat head screw driver. Pinhole type filters require a pin spanner wrench for removal.

Note

A pin spanner wrench suitable for IR filter removal is available for purchase from Allied Vision.
P/N: E9020001

**Cleaning with air**

Blow directly on the contaminated surface with moderate pressure, clean compressed air.

Caution

Do not exceed 6 bar (90 psi). If using canned air, approximately ~ 4.8 bar (70 psi) when full, do not shake or tilt the can, as extreme changes in temperature due to sudden cold air can crack the optic glass.

View a live image with the camera after blowing. If debris is still present, repeat the process until it is determined that the particulate cannot be dislodged. If this is the case, proceed to the contact cleaning technique.

Contact cleaning

Only use this method if the above air cleaning method does not sufficiently clean the surface. Use 99% pure isopropyl alcohol and clean cotton swabs. Wet the swab in the alcohol. Quickly wipe the optics in a single stroke. Prolonged exposure of alcohol on the swab can cause the swab glue to loosen and transfer to the optic glass. Do not reuse the same swab. Repeat this process until the debris is removed. If this process fails to remove the debris, contact Allied Vision.

Conformity

Allied Vision Technologies declares under its sole responsibility that all standard cameras of the **Prosilica GE** family to which this declaration relates are in conformity with the following standard(s) or other normative document(s):

- CE, following the provisions of 2004/108/EG directive
- FCC Part 15 Class A
- RoHS (2011/65/EU)



We declare, under our sole responsibility, that the previously described **Prosilica GE** cameras conform to the directives of the CE.



Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential environment. This equipment generates radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Any modifications not expressly approved in this manual may void your authority to operate this equipment.

Specifications

Prosilica GE680/680C

Feature	Specification
Resolution	640 x 480
Sensor	OnSemi KAI-0340
Type	CCD Progressive
Sensor size	Type 1/3
Cell size	7.4 μm
Lens mount	C (adjustable)
Max frame rate at full resolution	205 fps
A/D	12 bit
On-board FIFO	32 MB
Bit depth	8/12
Mono formats	GE680: Mono8, Mono12, Mono12Packed GE680C: Mono8
Color formats	BayerGR8, BayerGR12, BayerGR12Packed, RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed, RGB12Packed, YUV411Packed
Exposure control	25 μs to 53.7 s; 1 μs increments
Gain control	0 to 34 dB
Horizontal binning	1 to 8 columns
Vertical binning	1 to full resolution
TTL I/Os	1 input, 3 output
RS-232	1
Voltage requirements	5–16 VDC: Cameras SN: 02-XXXXA-XXXXX, 02-XXXXB-XXXXX 5–25 VDC: Cameras SN: 02-XXXXC-XXXXX
Power consumption	Typical < 4.5 W (@ 12 VDC); (full resolution and maximal frame rates)
Mass	169 g (without lens)
Body dimensions (L x W x H)	80 x 51 x 39 mm (including connectors, w/o tripod and lens)
Operating temperature	0 to +50 °C ambient temperature (without condensation)
Storage temperature	-10 to +70 °C ambient temperature (without condensation)
Trigger latency	1.2 μs
Trigger jitter	± 10 ns
tpd	90 ns
Operating humidity	20 to 80% non-condensing
Hardware interface standard	IEEE 802.3 1000BASE-T, 100BASE-TX
Software interface standard	GigE Vision Standard 1.2
Regulatory	CE, FCC Class A, RoHS (2011/65/EU)

Table 3: Prosilica GE680/680C camera specifications

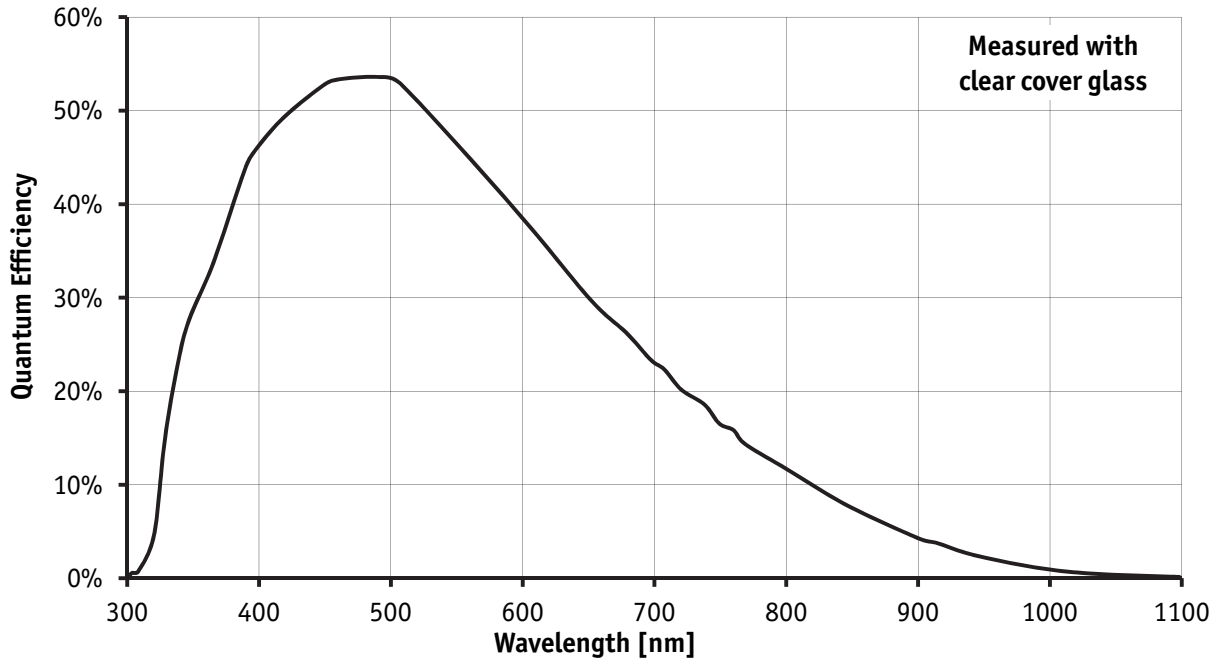


Figure 1: Prosilica GE680 monochrome spectral response

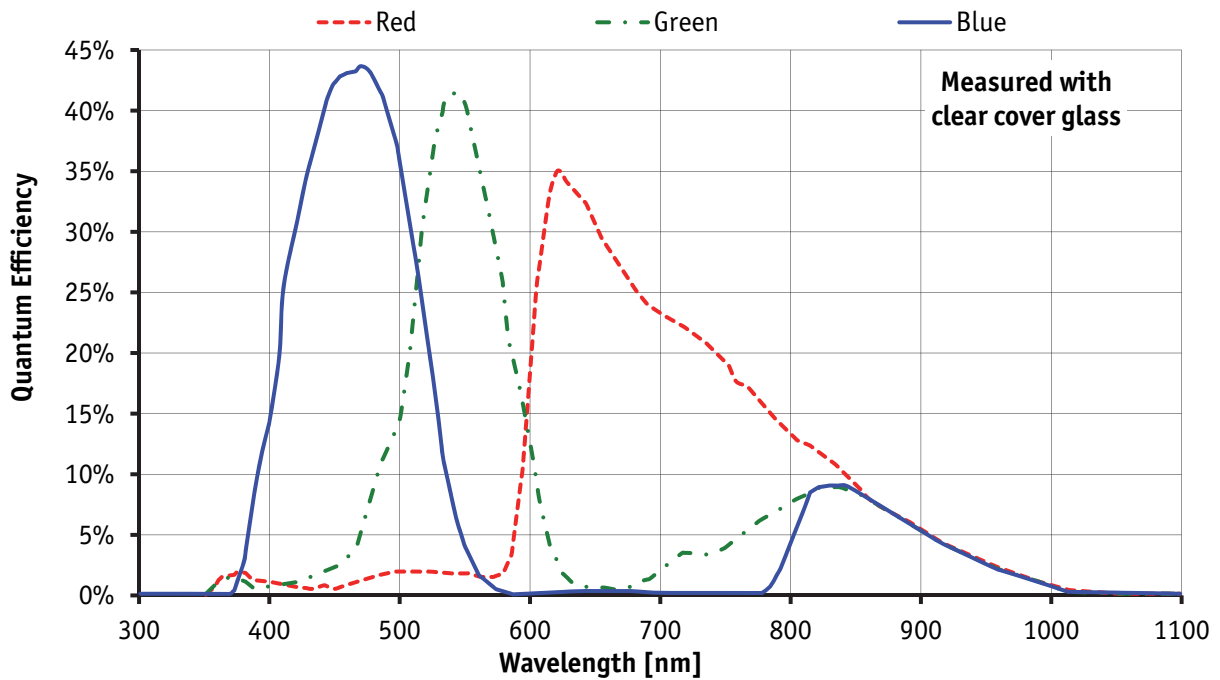


Figure 2: Prosilica GE680C color spectral response (without IR cut filter)

Prosilica GE1050/1050C

Feature	Specification
Resolution	1024 x 1024
Sensor	OnSemi KAI-01050
Type	CCD Progressive
Sensor size	Type 1/2
Cell size	5.5 μm
Lens mount	C (adjustable)
Max frame rate at full resolution	59 fps
A/D	12 bit
On-board FIFO	32 MB
Bit depth	8/12
Mono formats	GE1050: Mono8, Mono12, Mono12Packed GE1050C: Mono8
Color formats	BayerGR8, BayerGR12, BayerGR12Packed, RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed, RGB12Packed, YUV411Packed
Exposure control	10 μs to 53.7 s; 1 μs increments
Gain control	0 to 34 dB
Horizontal binning	1 to 8 columns
Vertical binning	1 to full resolution
TTL I/Os	1 input, 3 output
RS-232	1
Voltage requirements	5–16 VDC: Cameras SN: 02-XXXXA-XXXXX, 02-XXXXB-XXXXX 5–25 VDC: Cameras SN: 02-XXXXC-XXXXX
Power consumption	Typical < 5 W (@ 12 VDC); (full resolution and maximal frame rates)
Mass	178 g (without lens)
Body dimensions (L x W x H)	80 x 51 x 39 mm (including connectors, w/o tripod and lens)
Operating temperature	0 to +50 °C ambient temperature (without condensation)
Storage temperature	-10 to +70 °C ambient temperature (without condensation)
Trigger latency	5 μs
Trigger jitter	± 10 ns
tpd	90 ns
Operating humidity	20 to 80% non-condensing
Hardware interface standard	IEEE 802.3 1000BASE-T, 100BASE-TX
Software interface standard	GigE Vision Standard 1.2
Regulatory	CE, FCC Class A, RoHS (2011/65/EU)

Table 4: Prosilica GE1050/1050C camera specifications

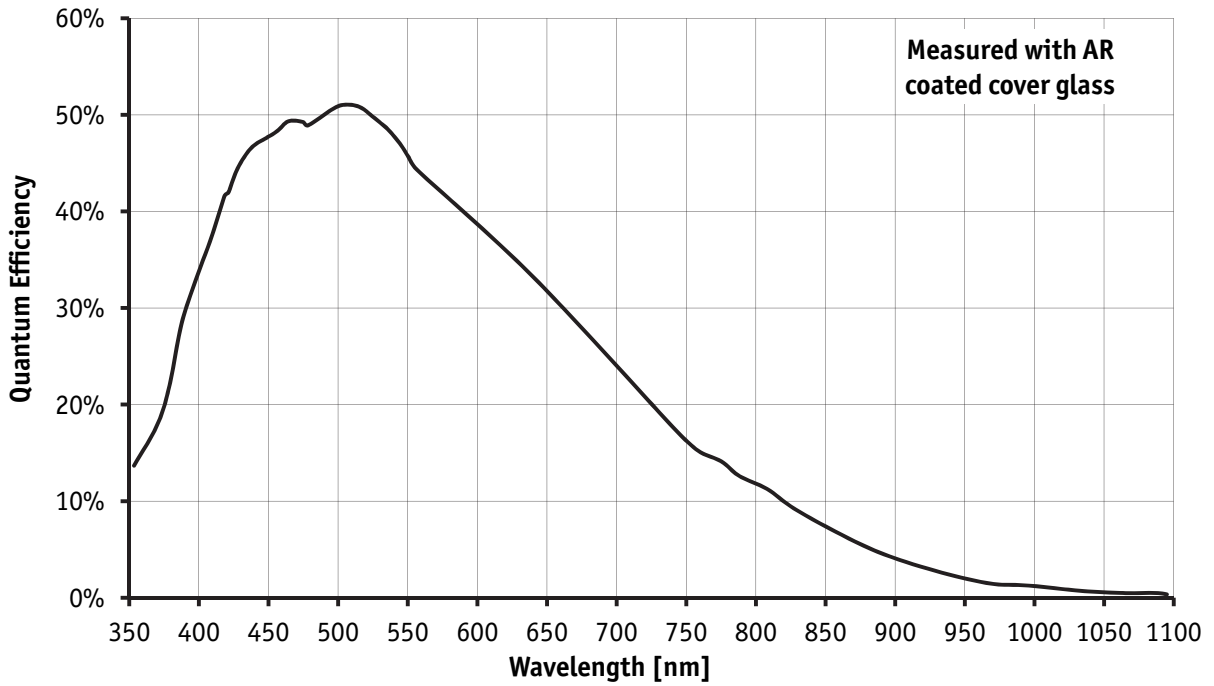


Figure 3: Prosilica GE1050 monochrome spectral response

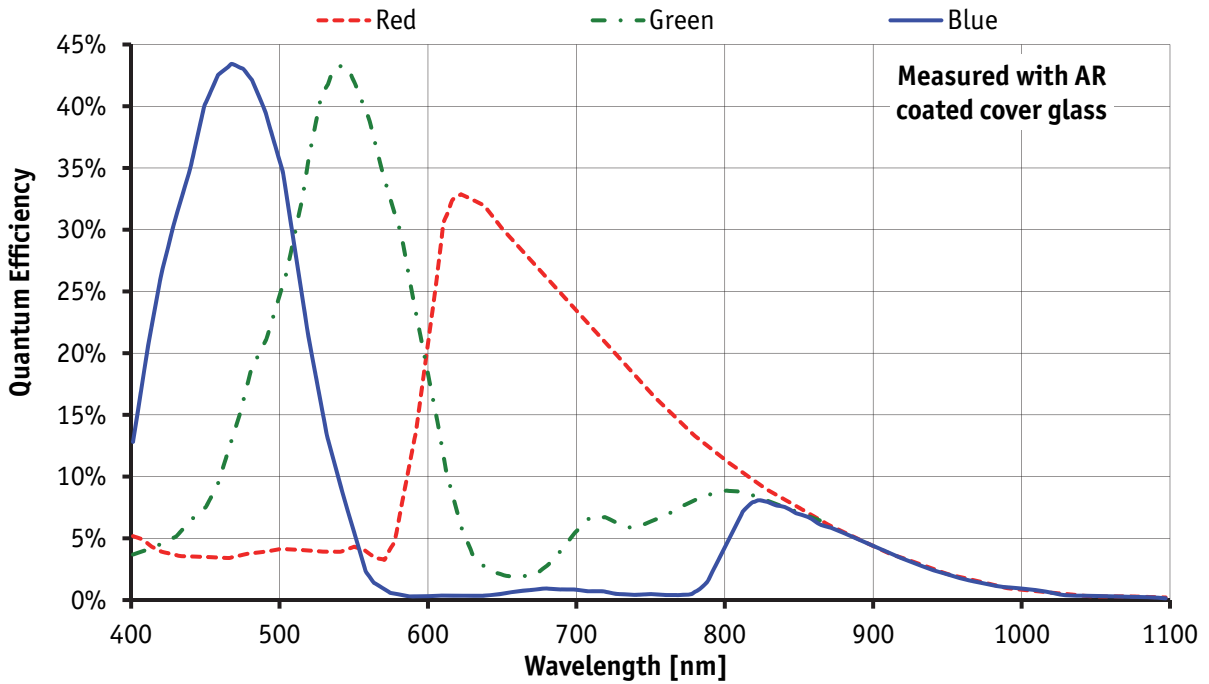


Figure 4: Prosilica GE1050C color spectral response (without IR cut filter)

Prosilica GE1650/1650C

Feature	Specification
Resolution	1600 x 1200
Sensor	OnSemi KAI-2020
Type	CCD Progressive
Sensor size	1 inch
Cell size	7.4 μm
Lens mount	C (adjustable)
Max frame rate at full resolution	32 fps
A/D	12 bit
On-board FIFO	32 MB
Bit depth	8/12
Mono formats	GE1650: Mono8, Mono12, Mono12Packed GE1650C: Mono8
Color formats	BayerGR8, BayerGR12, BayerGR12Packed, RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed, RGB12Packed, YUV411Packed
Exposure control	50 μs to 53.7 s; 1 μs increments
Gain control	0 to 34 dB
Horizontal binning	1 to 8 columns
Vertical binning	1 to full resolution
TTL I/Os	1 input, 3 output
RS-232	1
Voltage requirements	5–16 VDC: Cameras SN: 02-XXXXA-XXXXX, 02-XXXXB-XXXXX 5–25 VDC: Cameras SN: 02-XXXXC-XXXXX
Power consumption	Typical < 5 W (@ 12 VDC); (full resolution and maximal frame rates)
Mass	169 g (without lens)
Body dimensions (L x W x H)	80 x 51 x 39 mm (including connectors, w/o tripod and lens)
Operating temperature	0 to +50 °C ambient temperature (without condensation)
Storage temperature	-10 to +70 °C ambient temperature (without condensation)
Trigger latency	5 μs
Trigger jitter	± 10 ns
tpd	90 ns
Operating humidity	20 to 80% non-condensing
Hardware interface standard	IEEE 802.3 1000BASE-T, 100BASE-TX
Software interface standard	GigE Vision Standard 1.2
Regulatory	CE, FCC Class A, RoHS (2011/65/EU)

Table 5: Prosilica GE1650/1650C camera specifications

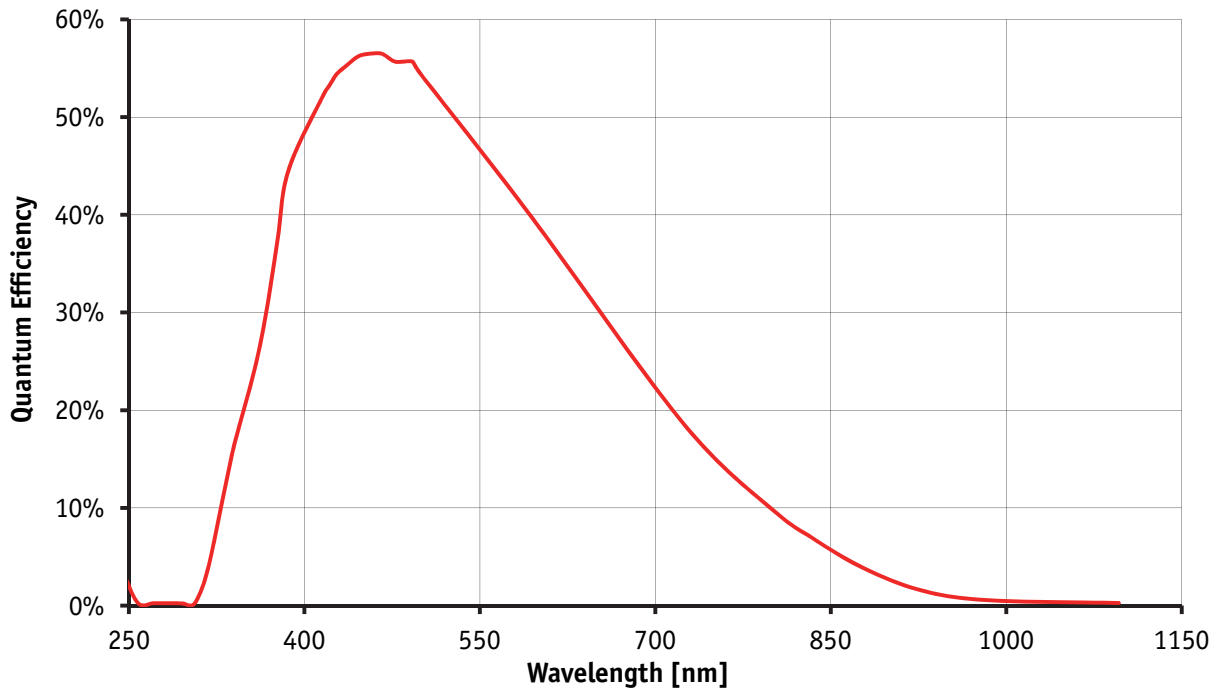


Figure 5: Prosilica GE1650 monochrome spectral response

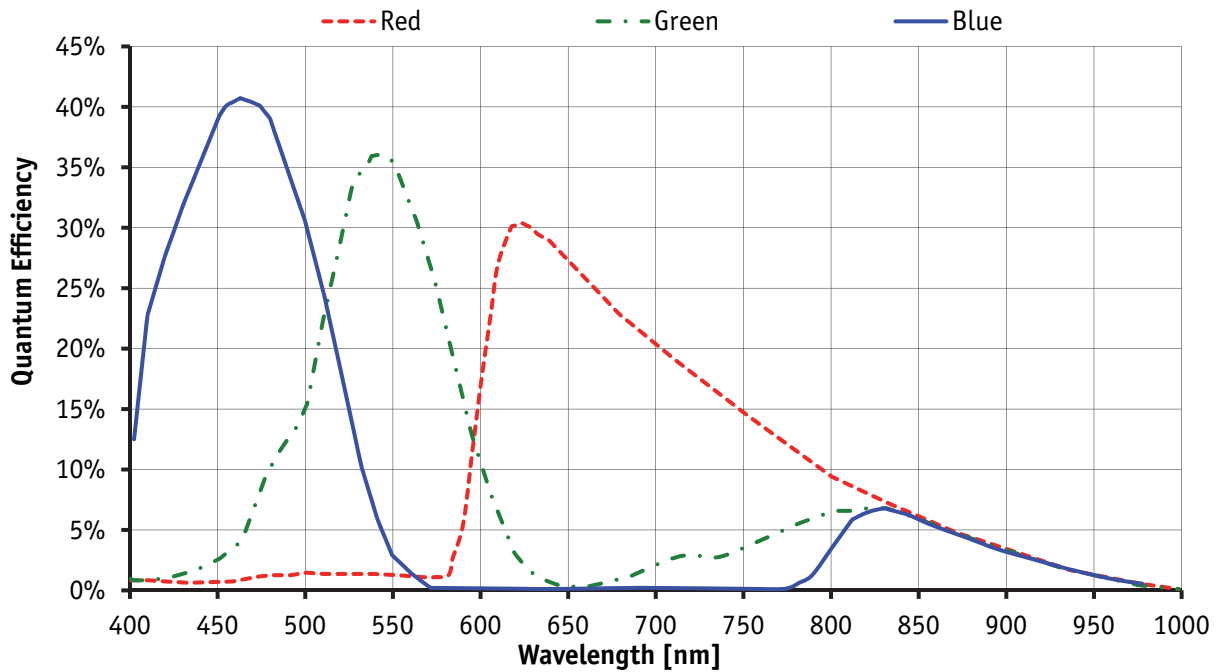


Figure 6: Prosilica GE1650C color spectral response (without IR cut filter)

Prosilica GE1660/1660C

Feature	Specification
Resolution	1600 x 1200
Sensor	OnSemi KAI-2050
Type	CCD Progressive
Sensor size	2/3 inch
Cell size	5.5 μm
Lens mount	C (adjustable)
Max frame rate at full resolution	34.6 fps
A/D	12 bit
On-board FIFO	32 MB
Bit depth	8/12
Mono formats	GE1660: Mono8, Mono12, Mono12Packed GE1660C: Mono8
Color formats	BayerGR8, BayerGR12, BayerGR12Packed, RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed, RGB12Packed, YUV411Packed
Exposure control	10 μs to 53.7 s; 1 μs increments
Gain control	0 to 34 dB
Horizontal binning	1 to 8 columns
Vertical binning	1 to full resolution
TTL I/Os	1 input, 3 output
RS-232	1
Voltage requirements	5–16 VDC: Cameras SN: 02-XXXXA-XXXXX, 02-XXXXB-XXXXX 5–25 VDC: Cameras SN: 02-XXXXC-XXXXX
Power consumption	Typical < 5 W (@ 12 VDC); (full resolution and maximal frame rates)
Mass	178 g (without lens)
Body dimensions (L x W x H)	80 x 51 x 39 mm (including connectors, w/o tripod and lens)
Operating temperature	0 to +50 °C ambient temperature (without condensation)
Storage temperature	-10 to +70 °C ambient temperature (without condensation)
Trigger latency	5 μs
Trigger jitter	± 10 ns
tpd	90 ns
Operating humidity	20 to 80% non-condensing
Hardware interface standard	IEEE 802.3 1000BASE-T, 100BASE-TX
Software interface standard	GigE Vision Standard 1.2
Regulatory	CE, FCC Class A, RoHS (2011/65/EU)

Table 6: Prosilica GE1660/1660C camera specifications

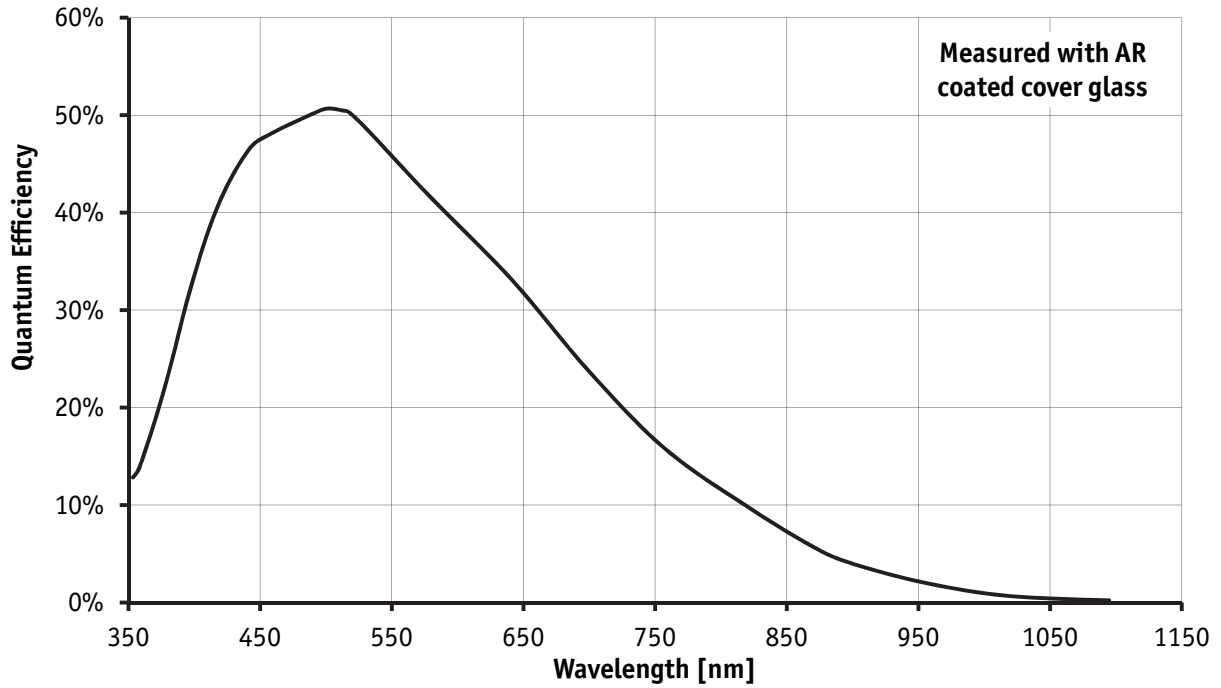


Figure 7: Prosilica GE1660 monochrome spectral response

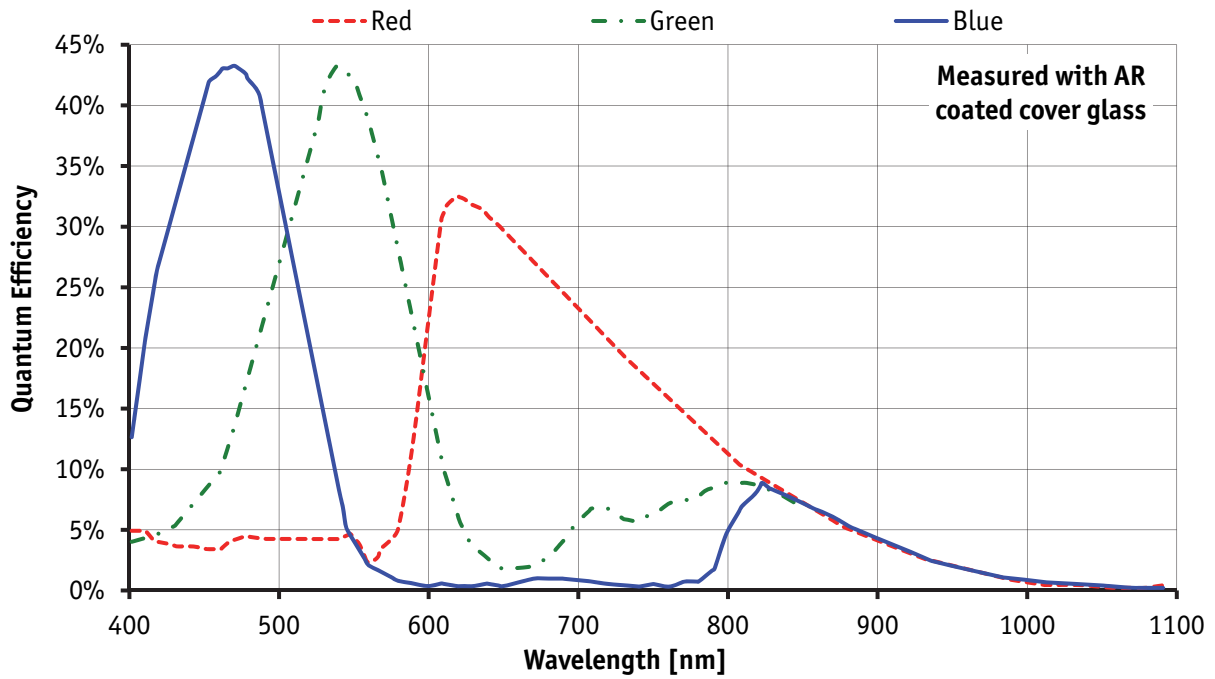


Figure 8: Prosilica GE1660C color spectral response (without IR cut filter)

Prosilica GE1900/1900C

Feature	Specification
Resolution	1920 x 1080
Sensor	OnSemi KAI-2093
Type	CCD Progressive
Sensor size	1 inch
Cell size	7.4 μm
Lens mount	C (adjustable)
Max frame rate at full resolution	30 fps
A/D	12 bit
On-board FIFO	32 MB
Bit depth	8/12
Mono formats	GE1900: Mono8, Mono12, Mono12Packed GE1900C: Mono8
Color formats	BayerGR8, BayerGR12, BayerGR12Packed, RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed, RGB12Packed, YUV411Packed
Exposure control	50 μs to 53.7 s; 1 μs increments
Gain control	0 to 34 dB
Horizontal binning	1 to 8 columns
Vertical binning	1 to full resolution
TTL I/Os	1 input, 3 output
RS-232	1
Voltage requirements	5–16 VDC: Cameras SN: 02-XXXXA-XXXXX, 02-XXXXB-XXXXX 5–25 VDC: Cameras SN: 02-XXXXC-XXXXX
Power consumption	Typical < 5 W (@ 12 VDC); (full resolution and maximal frame rates)
Mass	169 g (without lens)
Body dimensions (L x W x H)	80 x 51 x 39 mm (including connectors, w/o tripod and lens)
Operating temperature	0 to +50 °C ambient temperature (without condensation)
Storage temperature	-10 to +70 °C ambient temperature (without condensation)
Trigger latency	5 μs
Trigger jitter	± 10 ns
tpd	90 ns
Operating humidity	20 to 80% non-condensing
Hardware interface standard	IEEE 802.3 1000BASE-T, 100BASE-TX
Software interface standard	GigE Vision Standard 1.2
Regulatory	CE, FCC Class A, RoHS (2011/65/EU)

Table 7: Prosilica GE1900/1900C camera specifications

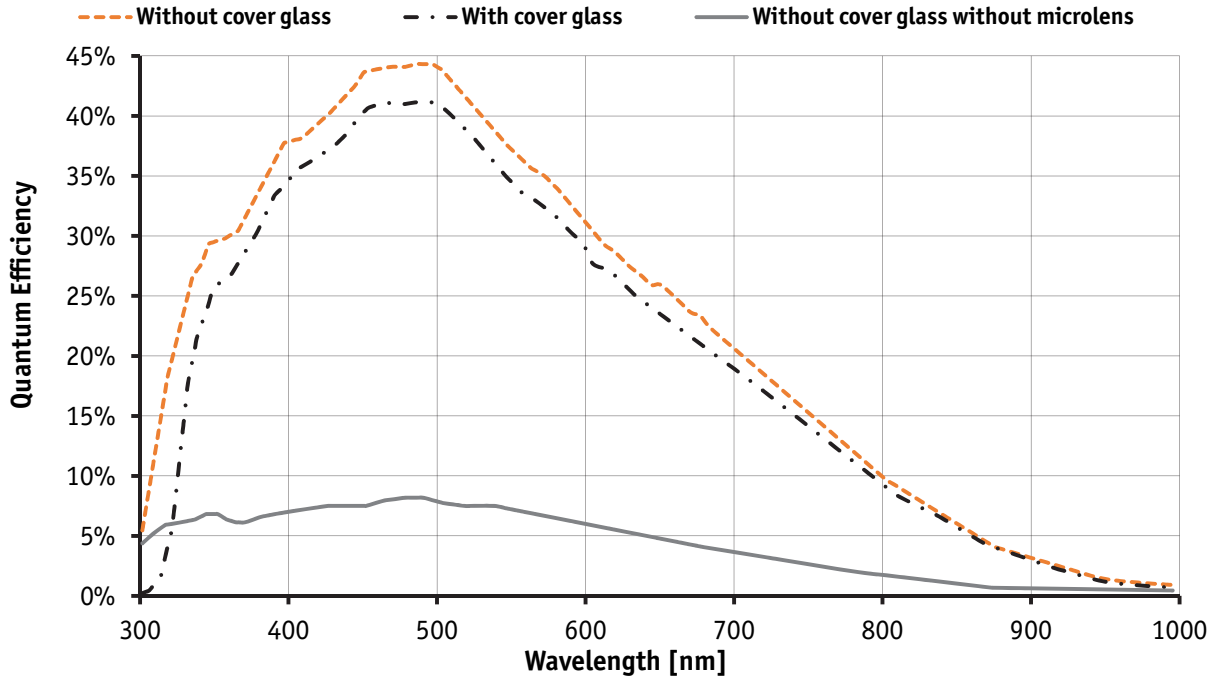


Figure 9: Prosilica GE1900 monochrome spectral response

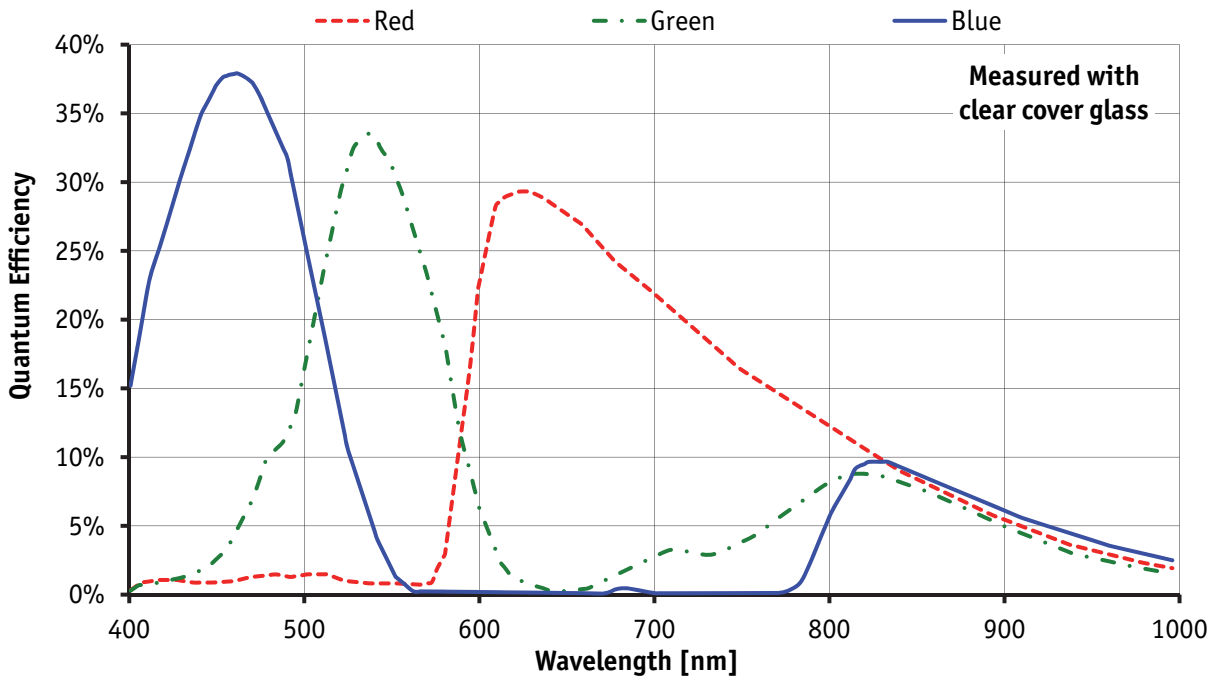


Figure 10: Prosilica GE1900C color spectral response (without IR cut filter)

Prosilica GE1910/1910C

Feature	Specification
Resolution	1920 x 1080
Sensor	OnSemi KAI-02150
Type	CCD Progressive
Sensor size	2/3 inch
Cell size	5.5 μm
Lens mount	C (adjustable)
Max frame rate at full resolution	32 fps
A/D	12 bit
On-board FIFO	32 MB
Bit depth	8/12
Mono formats	GE1910: Mono8, Mono12, Mono12Packed GE1910C: Mono8
Color formats	BayerGR8, BayerGR12, BayerGR12Packed, RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed, RGB12Packed, YUV411Packed
Exposure control	10 μs to 53.7 s; 1 μs increments
Gain control	0 to 34 dB
Horizontal binning	1 to 8 columns
Vertical binning	1 to full resolution
TTL I/Os	1 input, 3 output
RS-232	1
Voltage requirements	5–16 VDC: Cameras SN: 02-XXXXA-XXXXX, 02-XXXXB-XXXXX 5–25 VDC: Cameras SN: 02-XXXXC-XXXXX
Power consumption	Typical < 5 W (@ 12 VDC); (full resolution and maximal frame rates)
Mass	178 g (without lens)
Body dimensions (L x W x H)	80 x 51 x 39 mm (including connectors, w/o tripod and lens)
Operating temperature	0 to +50 °C ambient temperature (without condensation)
Storage temperature	-10 to +70 °C ambient temperature (without condensation)
Trigger latency	5 μs
Trigger jitter	± 10 ns
tpd	90 ns
Operating humidity	20 to 80% non-condensing
Hardware interface standard	IEEE 802.3 1000BASE-T, 100BASE-TX
Software interface standard	GigE Vision Standard 1.2
Regulatory	CE, FCC Class A, RoHS (2011/65/EU)

Table 8: Prosilica GE1910/1910C camera specifications

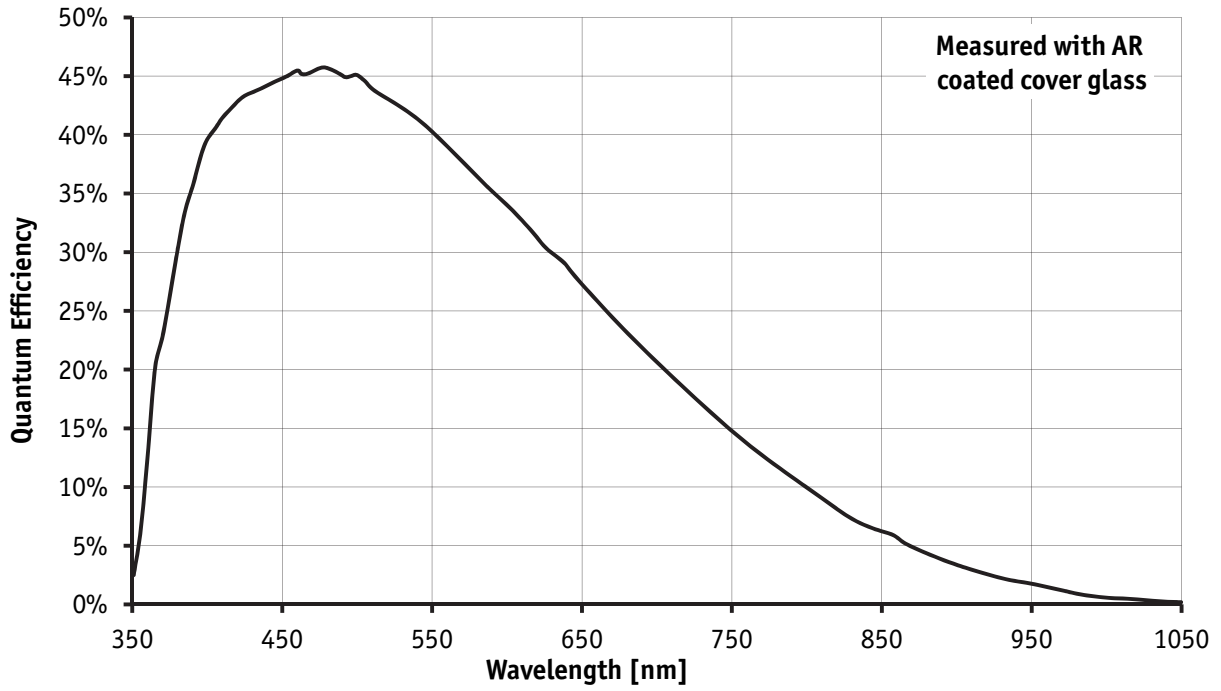


Figure 11: Prosilica GE1910 monochrome spectral response

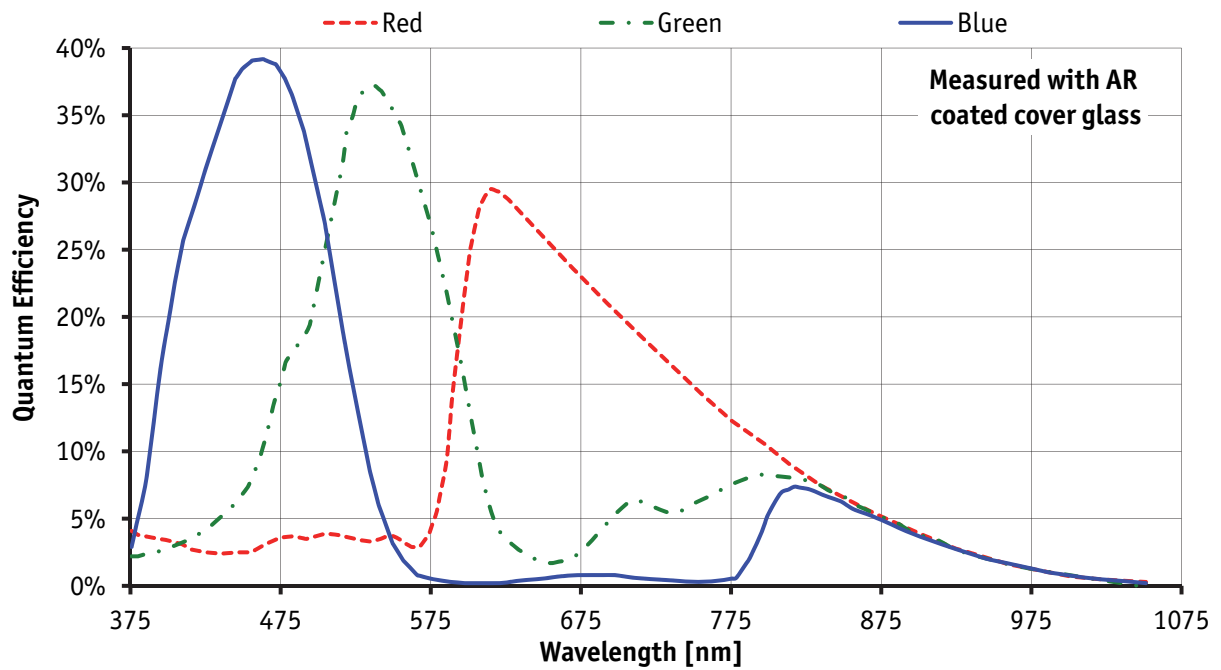


Figure 12: Prosilica GE1910C color spectral response (without IR cut filter)

Prosilica GE2040/2040C

Feature	Specification
Resolution	2040 x 2048
Sensor	OnSemi KAI- 04022
Type	CCD Progressive
Sensor size	1.2 inch
Cell size	7.4 μm
Lens mount	C (adjustable) / F
Max frame rate at full resolution	15 fps
A/D	12 bit
On-board FIFO	32 MB
Bit depth	8/12
Mono formats	GE2040: Mono8, Mono12, Mono12Packed GE2040C: Mono8
Color formats	BayerGR8, BayerGR12, BayerGR12Packed, RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed, RGB12Packed, YUV411Packed
Exposure control	75 μs to 53.7 s; 1 μs increments
Gain control	0 to 34 dB
Horizontal binning	1 to 8 columns
Vertical binning	1 to full resolution
TTL I/Os	1 input, 3 output
RS-232	1
Voltage requirements	5–16 VDC: Cameras SN: 02-XXXXA-XXXXX, 02-XXXXB-XXXXX 5–25 VDC: Cameras SN: 02-XXXXC-XXXXX
Power consumption	Typical < 5.5 W (@ 12 VDC); (full resolution and maximal frame rates)
Mass	169 g (without lens)
Body dimensions (L x W x H)	80 x 51 x 39 mm (including connectors, w/o tripod and lens)
Operating temperature	0 to +50 °C ambient temperature (without condensation)
Storage temperature	-10 to +70 °C ambient temperature (without condensation)
Trigger latency	4.2 μs
Trigger jitter	± 10 ns
tpd	90 ns
Operating humidity	20 to 80% non-condensing
Hardware interface standard	IEEE 802.3 1000BASE-T, 100BASE-TX
Software interface standard	GigE Vision Standard 1.2
Regulatory	CE, FCC Class A, RoHS (2011/65/EU)

Table 9: Prosilica GE2040/2040C camera specifications

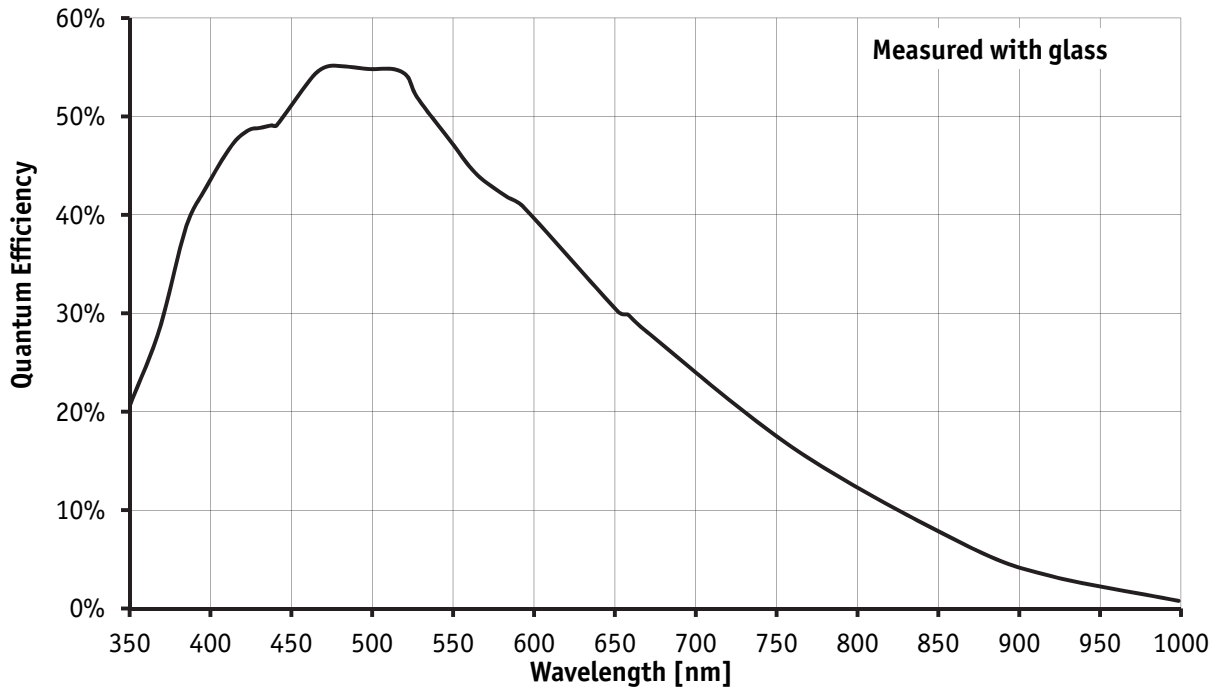


Figure 13: Prosilica GE2040 monochrome spectral response

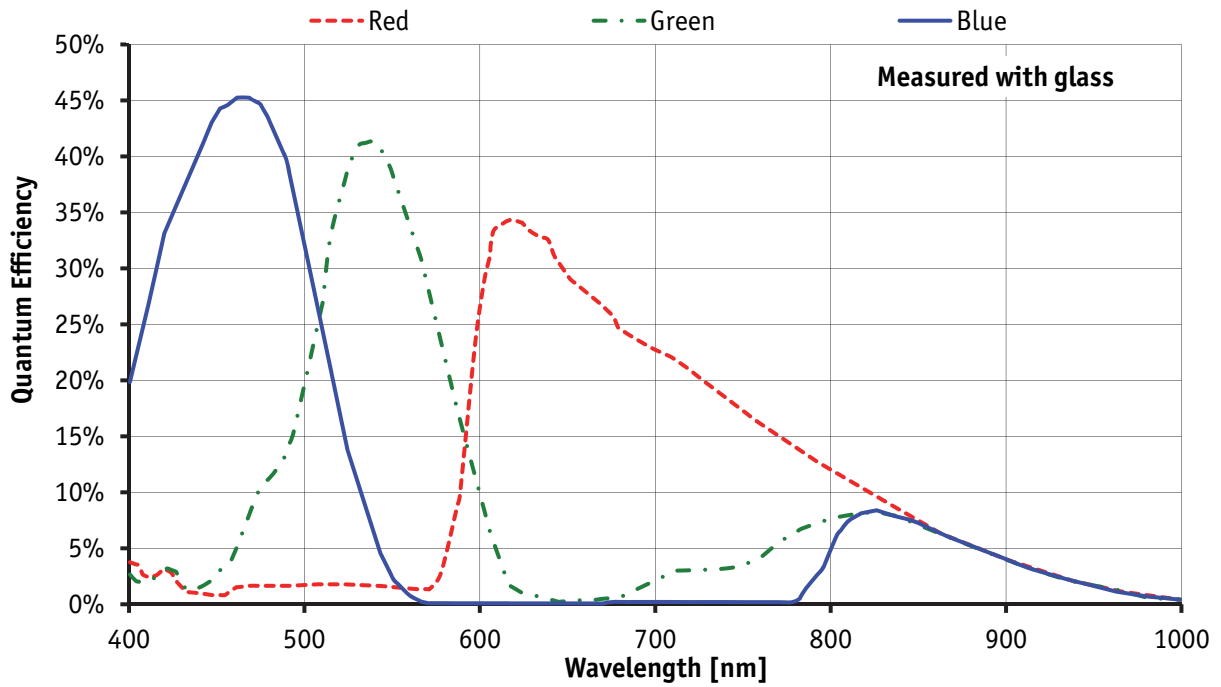


Figure 14: Prosilica GE2040C color spectral response (without IR cut filter)

Prosilica GE4000/4000C

Feature	Specification
Resolution	4008 x 2672
Sensor	OnSemi KAI-11002
Type	CCD Progressive
Sensor size	35 mm
Cell size	9 μm
Lens mount	F
Max frame rate at full resolution	5 fps
A/D	12 bit
On-board FIFO	32 MB
Bit depth	8/12
Mono formats	GE4000: Mono8, Mono12, Mono12Packed
Color formats	BayerGR8, BayerGR12, BayerGR12Packed
Exposure control	140 μs to 68.7 s; 1 μs increments
Gain control	0 to 34 dB
Horizontal binning	1 to 8 columns
Vertical binning	1 to full resolution
TTL I/Os	1 input, 3 output
RS-232	1
Voltage requirements	5–16 VDC: Cameras SN: 02-XXXXA-XXXXX, 02-XXXXB-XXXXX 5–25 VDC: Cameras SN: 02-XXXXC-XXXXX
Power consumption	Typical < 6 W (@ 12 VDC); (full resolution and maximal frame rates)
Mass	402 g (without lens)
Body dimensions (L x W x H)	110 x 66 x 66 mm (including connectors, w/o tripod and lens)
Operating temperature	0 to +50 °C ambient temperature (without condensation)
Storage temperature	-10 to +70 °C ambient temperature (without condensation)
Trigger latency	4.2 μs
Trigger jitter	± 10 ns
tpd	90 ns
Operating humidity	20 to 80% non-condensing
Hardware interface standard	IEEE 802.3 1000BASE-T, 100BASE-TX
Software interface standard	GigE Vision Standard 1.2
Regulatory	CE, FCC Class A, RoHS (2011/65/EU)

Table 10: Prosilica GE4000/4000C camera specifications

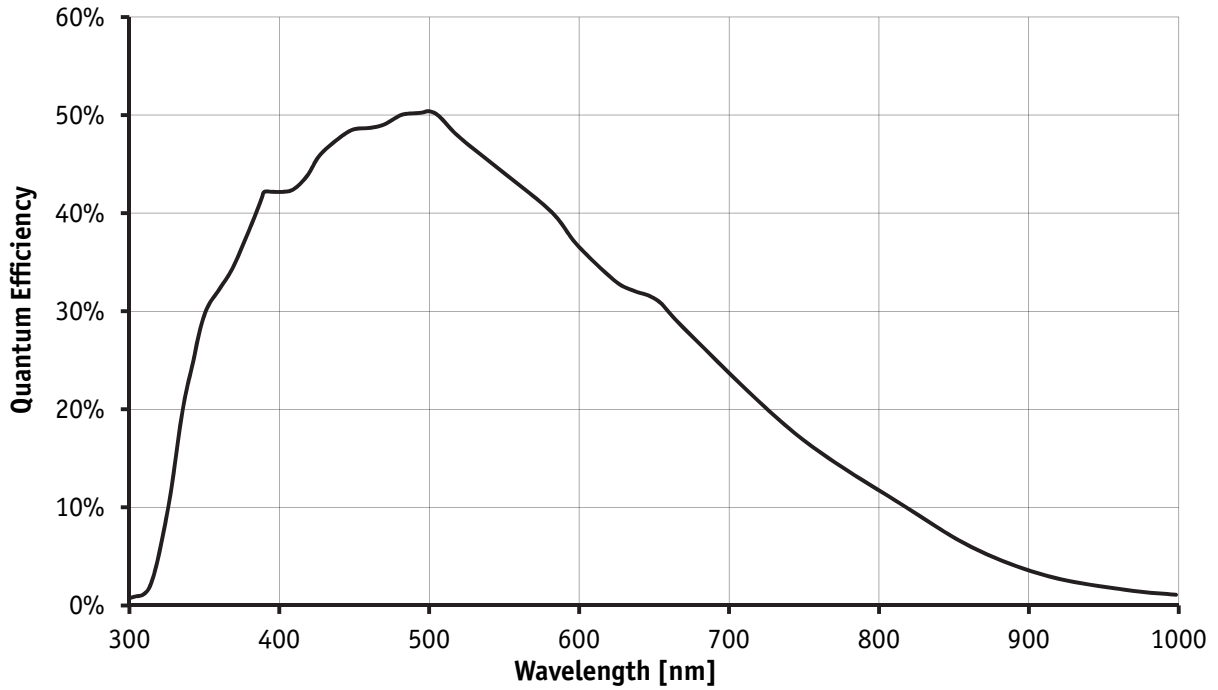


Figure 15: Prosilica GE4000 monochrome spectral response

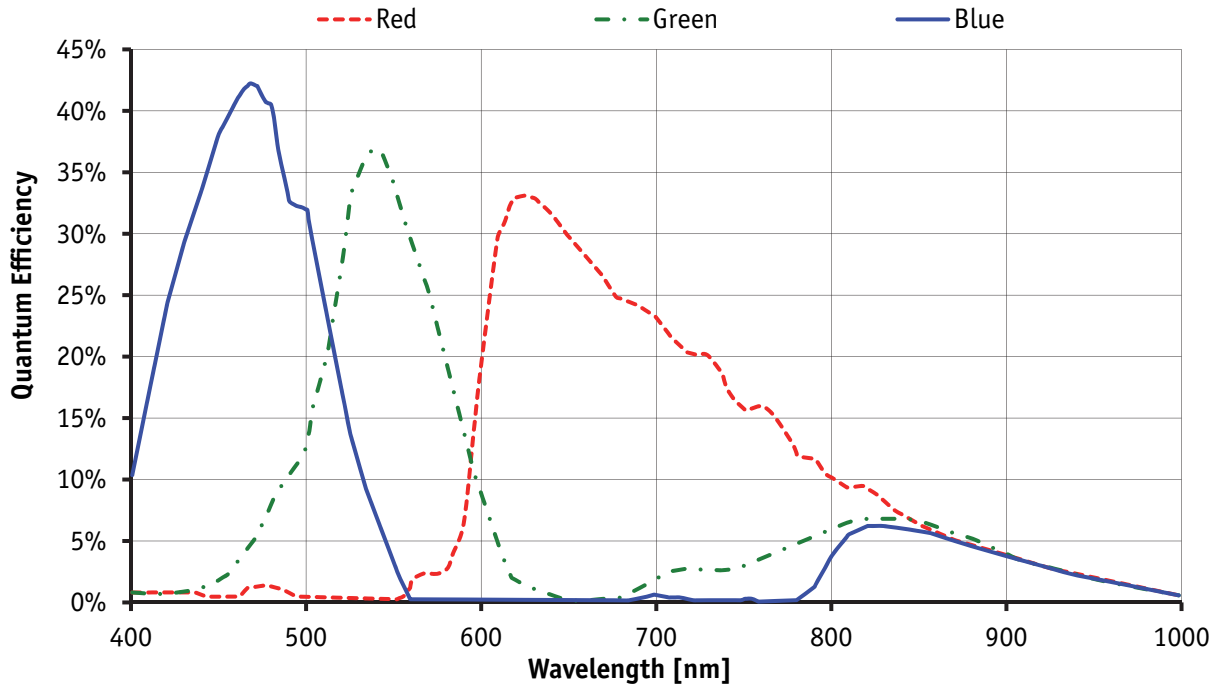


Figure 16: Prosilica GE4000C color spectral response (without IR cut filter)

Prosilica GE4900/4900C

Feature	Specification
Resolution	4872 x 3248
Sensor	OnSemi KAI-16000
Type	CCD Progressive
Sensor size	35 mm
Cell size	7.4 μm
Lens mount	F
Max frame rate at full resolution	3 fps
A/D	12 bit
On-board FIFO	32 MB
Bit depth	8/12
Mono formats	GE4900: Mono8, Mono12, Mono12Packed
Color formats	BayerGR8, BayerGR12, BayerGR12Packed
Exposure control	625 μs to 68.7 s; 1 μs increments
Gain control	0 to 34 dB
Horizontal binning	1 to 8 columns
Vertical binning	1 to full resolution
TTL I/Os	1 input, 3 output
RS-232	1
Voltage requirements	5–16 VDC: Cameras SN: 02-XXXXA-XXXXX, 02-XXXXB-XXXXX 5–25 VDC: Cameras SN: 02-XXXXC-XXXXX
Power consumption	Typical < 6 W (@ 12 VDC); (full resolution and maximal frame rates)
Mass	391 g (without lens)
Body dimensions (L x W x H)	110 x 66 x 66 mm (including connectors, w/o tripod and lens)
Operating temperature	0 to +50 °C ambient temperature (without condensation)
Storage temperature	-10 to +70 °C ambient temperature (without condensation)
Trigger latency	4.2 μs
Trigger jitter	± 10 ns
tpd	90 ns
Operating humidity	20 to 80% non-condensing
Hardware interface standard	IEEE 802.3 1000BASE-T, 100BASE-TX
Software interface standard	GigE Vision Standard 1.2
Regulatory	CE, FCC Class A, RoHS (2011/65/EU)

Table 11: Prosilica GE4900/4900C camera specifications

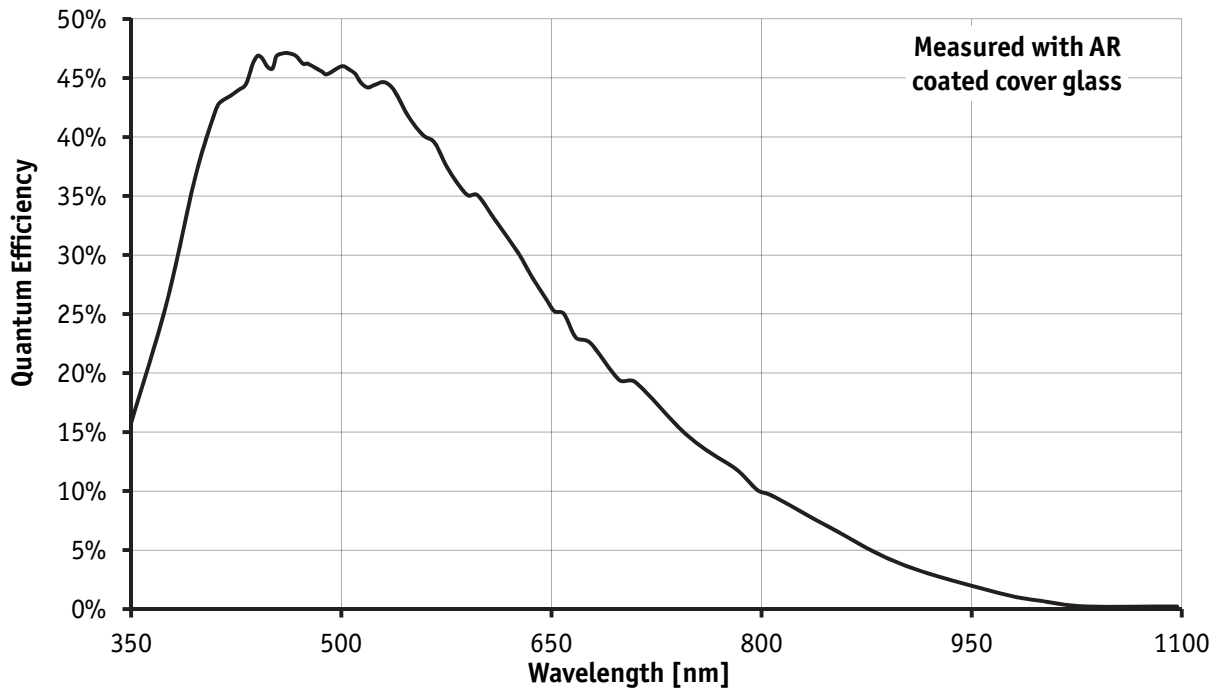


Figure 17: Prosilica GE4900 monochrome spectral response

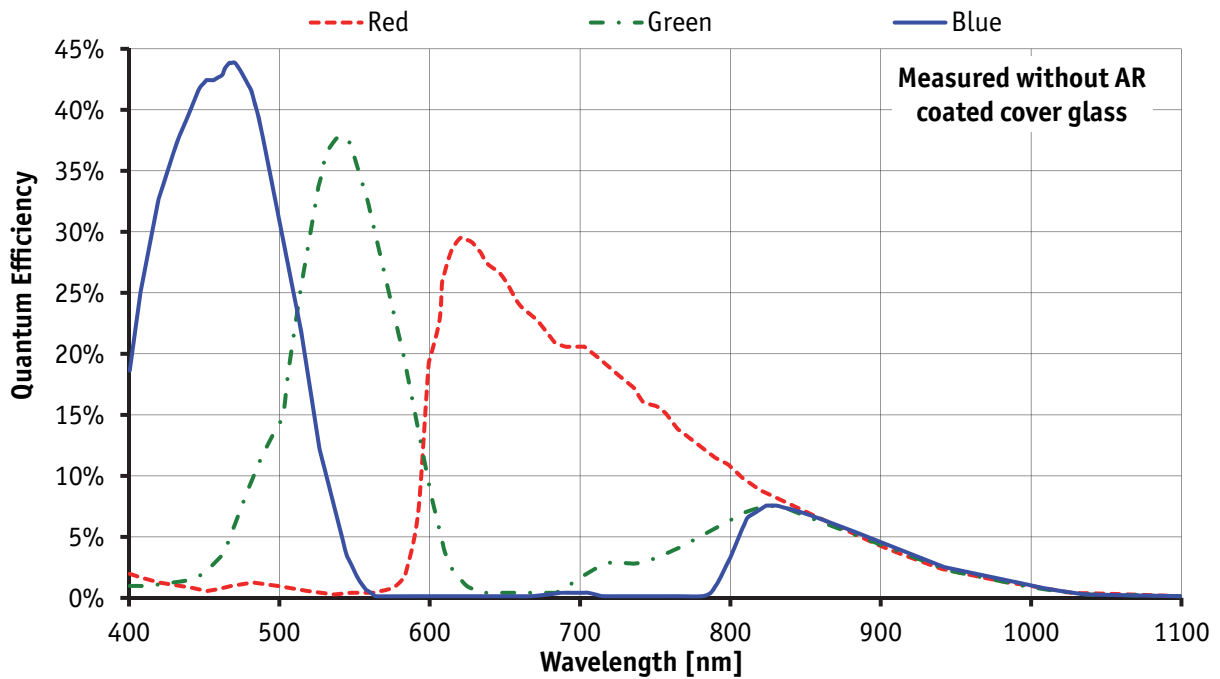



Figure 18: Prosilica GE4900C color spectral response (without IR cut filter)

Camera attribute highlights

Allied Vision cameras support a number of standard and extended features. The table below identifies a selection of interesting capabilities of the Prosilica GE camera family.

www  A complete listing of camera controls, including control definitions can be found online:



PvAPI users: [GigE Camera and Driver Attributes](#) document

VIMBA users: [GigE Features Reference](#) document

Control	Description
Gain control	Manual and auto
Exposure control	Manual and auto
White balance	Red and blue channel; manual and auto control
External trigger event	Rising edge, falling edge, any edge, level high, level low
External trigger delay	0 to 60* s; 1 μ s increments
Fixed rate control	0.001 fps to maximum frame rate
Imaging modes	Free-running, external trigger, fixed rate, software trigger
Sync out modes	Trigger ready, trigger input, exposing, readout, imaging, strobe, GPO
Region of interest	Independent x and y control with 1 pixel resolution
Multicast	Streaming to multiple computers
Event channel	In-camera events including exposure start and trigger are asynchronously broadcasted to the host computer
Chunk data	Captured images are bundled with attribute information such as exposure and gain value
*May vary depending on the camera model	

Table 12: Prosilica GE camera and driver attribute highlights

Filters

All Prosilica GE color models are equipped with an infrared block filter (IR filter). This filter is employed to prevent infrared wavelength photons from passing to the sensor. In the absence of IR filter, images are dominated by red and incapable of being properly color balanced. Monochrome cameras do not employ an IR filter.

The figure below shows the filter transmission response for the IRC30 filter employed in the Prosilica GE cameras.

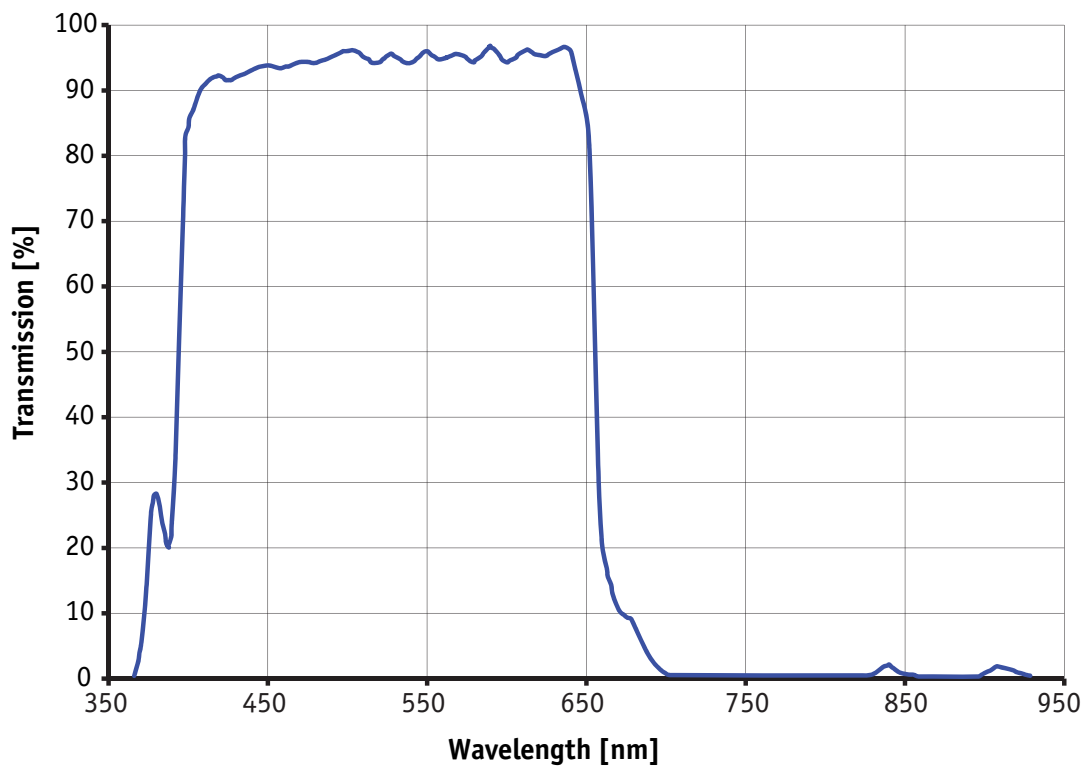


Figure 19: IRC30 filter transmission response

Camera dimensions

Prosilica GE C-Mount (adjustable): GE680/680C


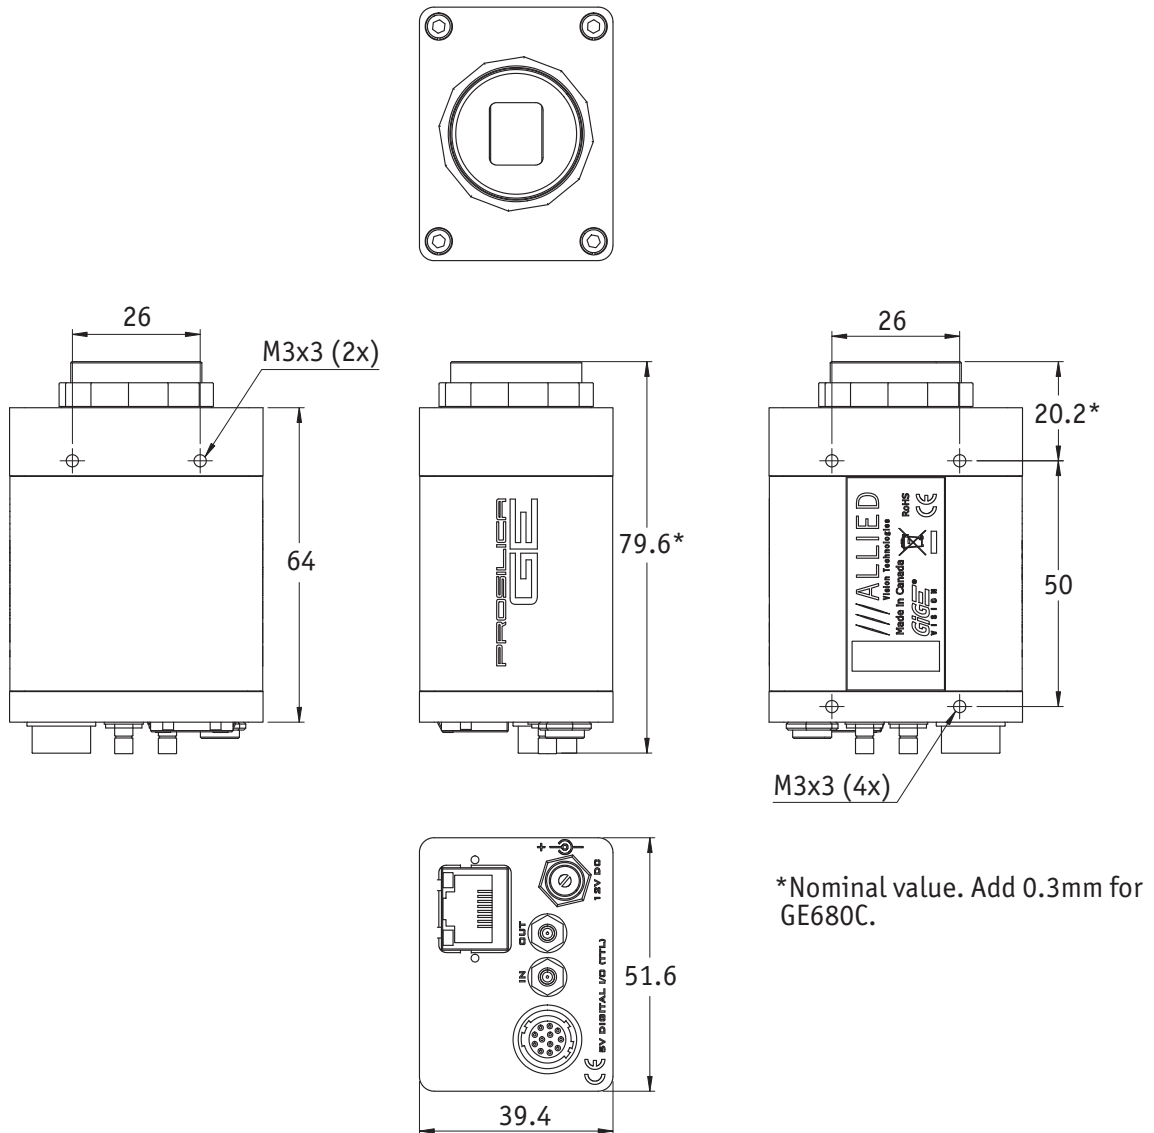


Figure 20: Prosilica GE680 adjustable C-Mount mechanical dimensions

Prosilica GE C-Mount (adjustable)


GE1050/1050C, GE1650/1650C, GE1660/1660C, GE1900/1900C, GE1910/1910C, GE2040/2040C

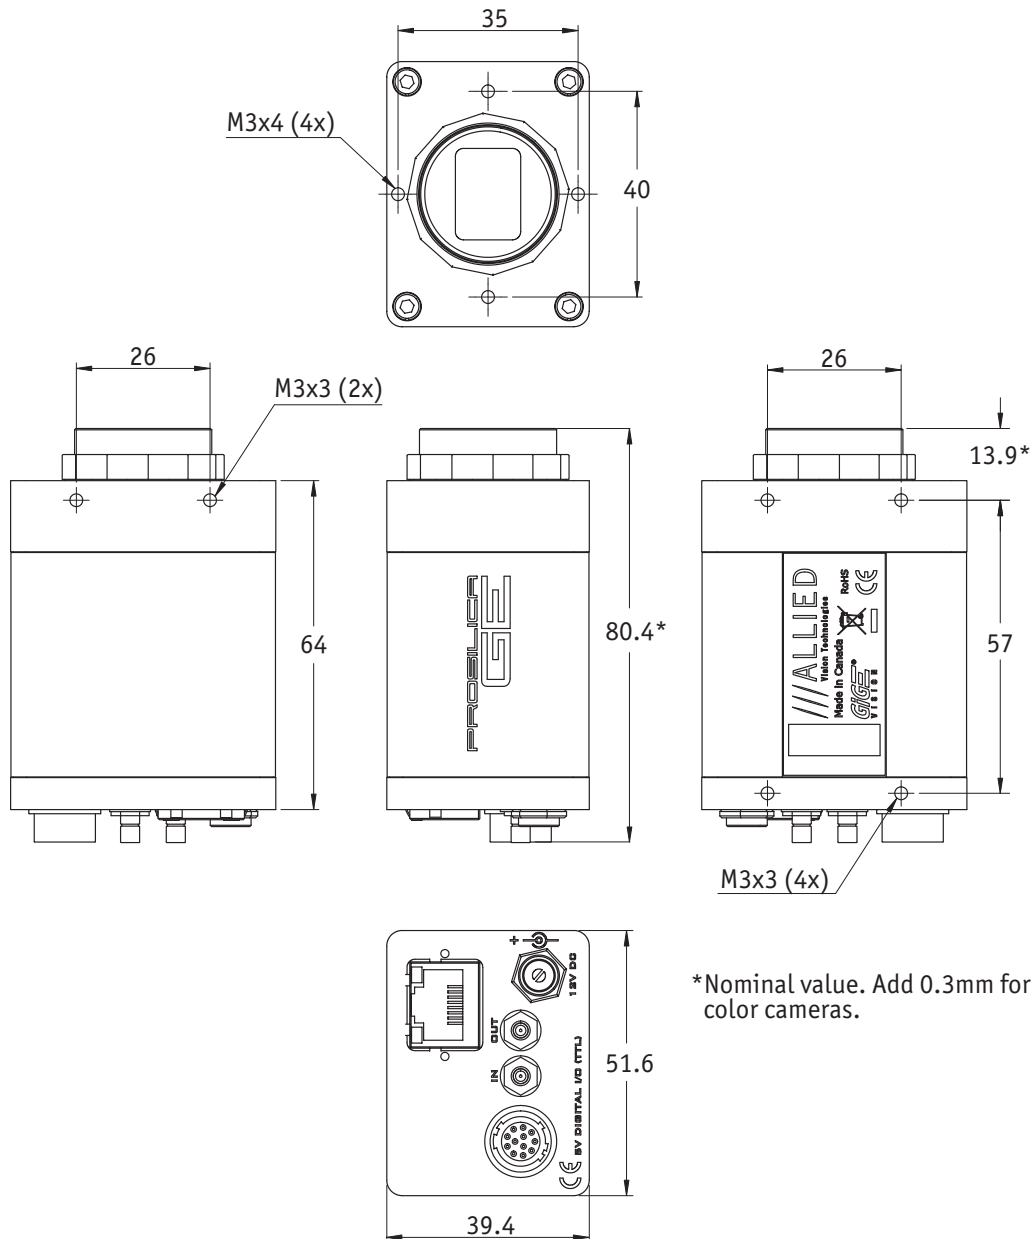

*Nominal value. Add 0.3mm for color cameras.

Figure 21: Prosilica GE adjustable C-Mount models mechanical dimensions

Prosilica GE F-Mount: GE2040/2040C

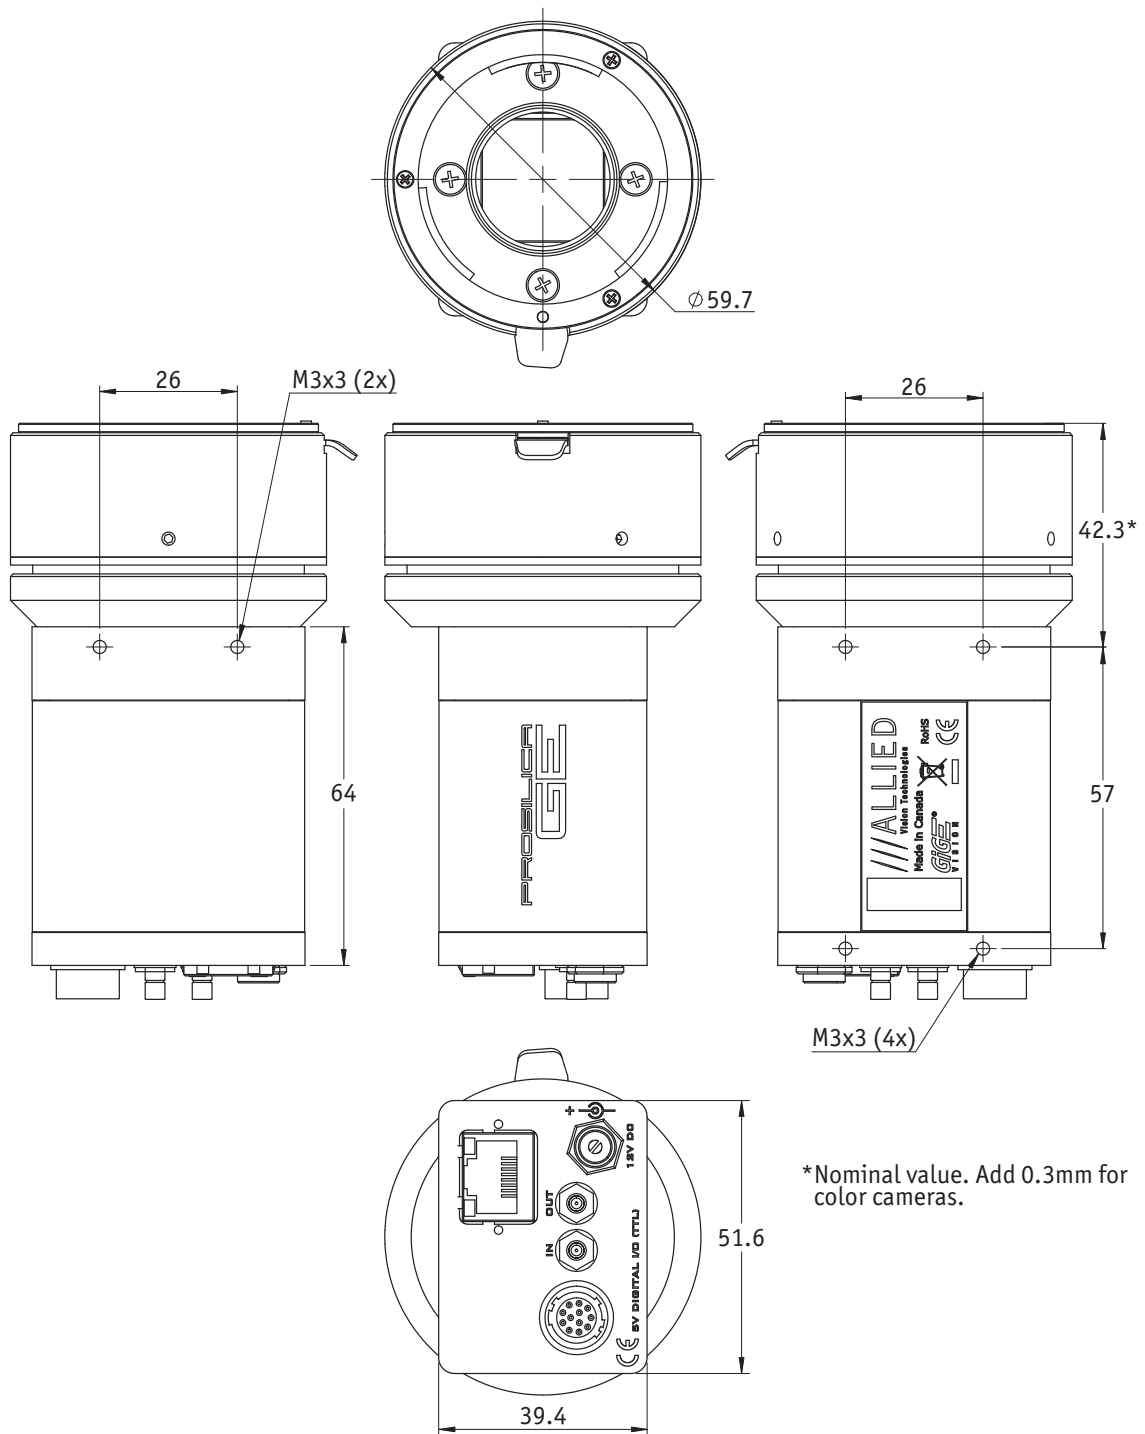

*Nominal value. Add 0.3mm for color cameras.

Figure 22: Prosilica GE F-Mount mechanical dimensions

Prosilica GE large format F-Mount: GE4000/4000C, GE4900/4900C

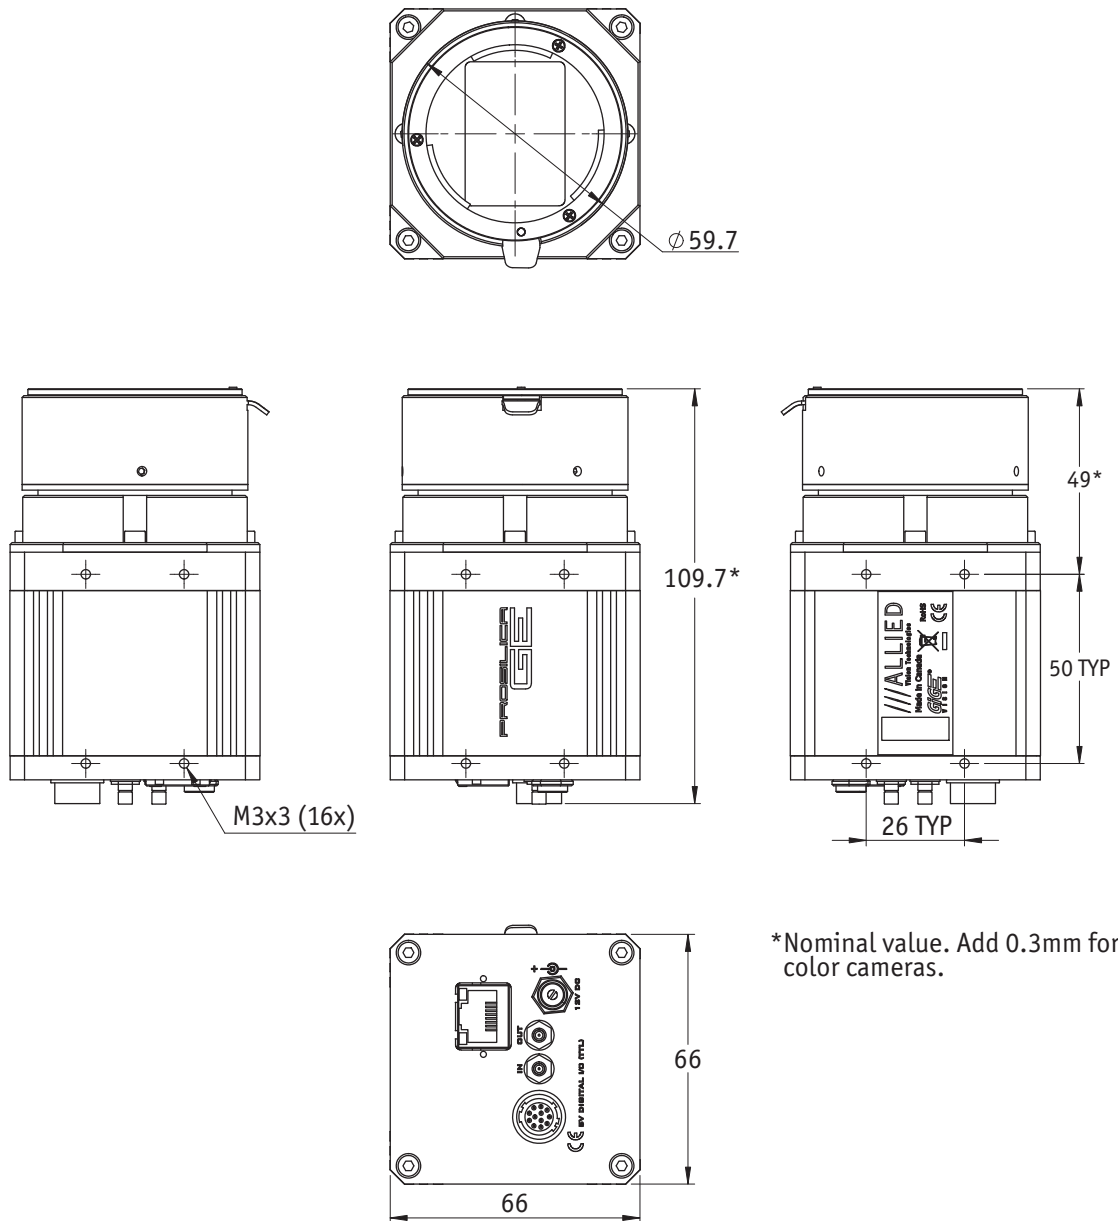


Figure 23: Prosilica GE large format F-Mount mechanical dimensions

Tripod adapter

A Prosilica GE camera can be mounted on a camera tripod by using a mounting plate P/N 02-5000A. The same mounting plate can be used for all models within the GE camera family.

Note Prosilica GE tripod mount is available for purchase from Allied Vision.



P/N: 02-5000A

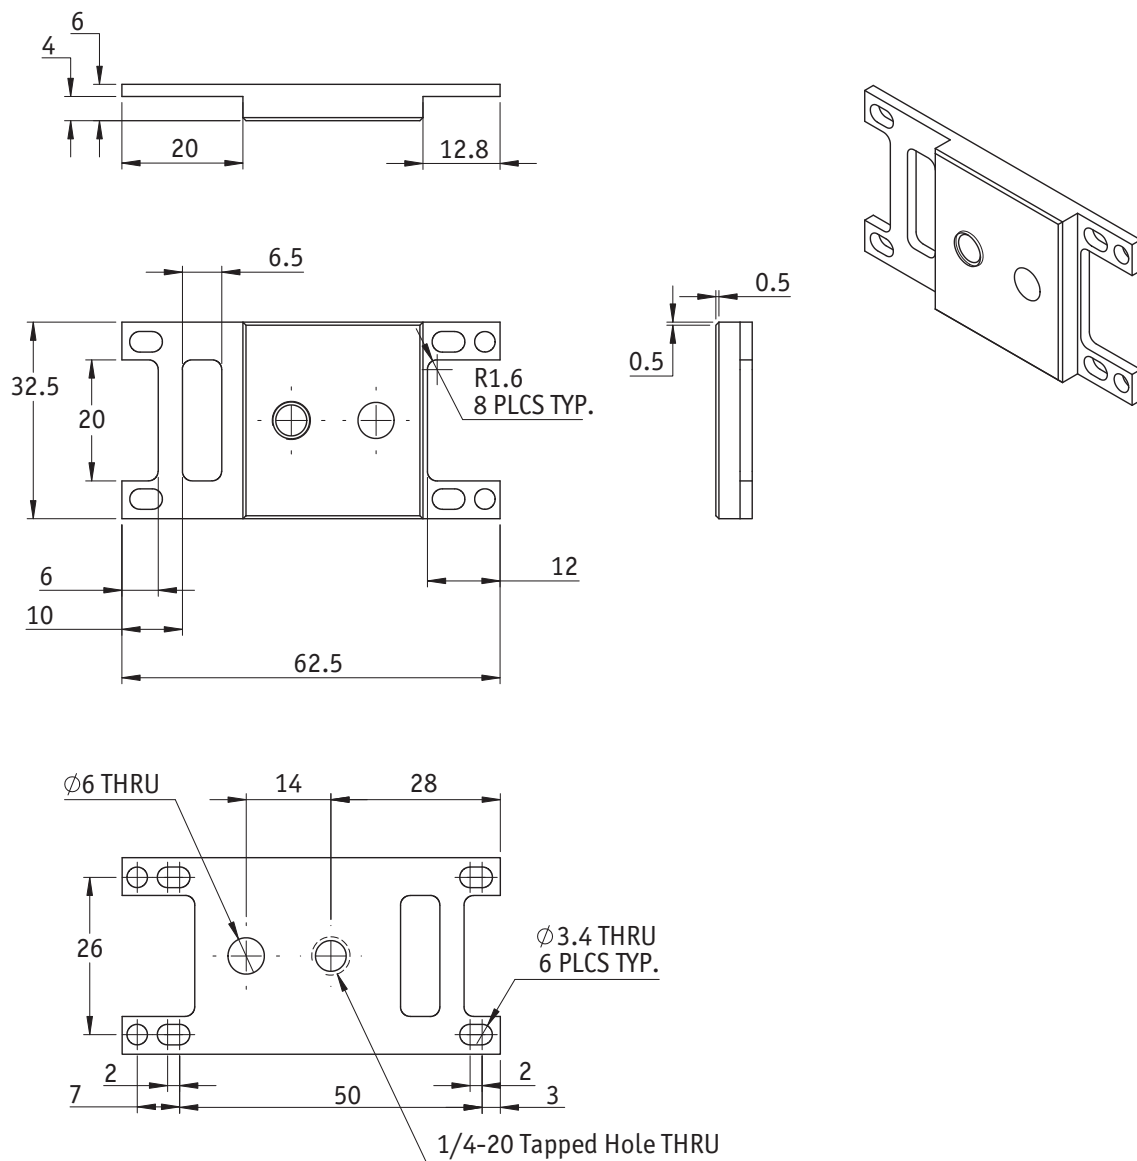


Figure 24: Prosilica GE tripod mount mechanical drawing

C-Mount flange focal distance

Flange focal distance is the optical distance from the mounting flange to image sensor die. Prosilica GE C-Mount cameras are optically calibrated to a standard 17.526 mm optical flange focal distance, with a $\pm 10 \mu\text{m}$ tolerance.

www



Prosilica GE cameras are shipped with adjustable C-Mount. The camera can also be built with a CS-Mount with a standard 12.50 mm optical flange focal distance and a $\pm 10 \mu\text{m}$ tolerance.

See **Modular Concept** for more information:

http://www.alliedvision.com/fileadmin/content/documents/products/cameras/various/modular-concept/Modular_concept_external.pdf

Adjustment of C-Mount

The C-Mount is adjusted at the factory and should not require adjusting. If for some reason the lens mount requires adjustment, use the following method.

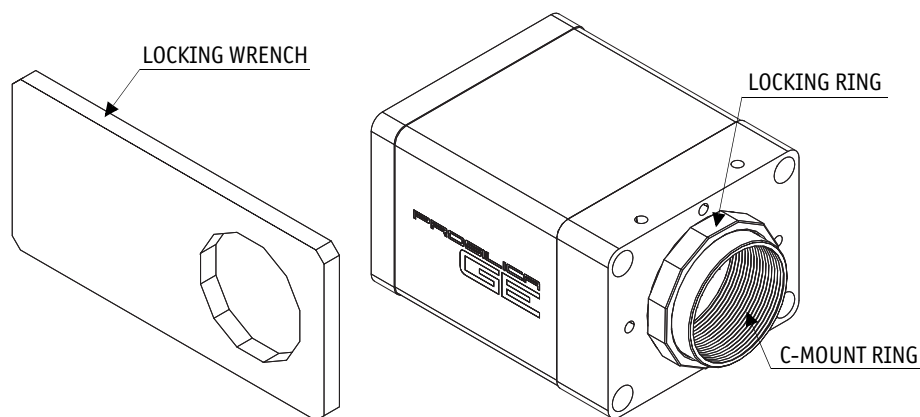


Figure 25: Prosilica GE C-Mount camera and locking wrench

Loosen locking ring

Use an adjustable wrench to loosen the locking ring. Be careful not to scratch the camera. When the locking ring is loose, unthread the ring a few turns from the camera face.

Note

A wrench suitable for this procedure is available for purchase from Allied Vision.
P/N: 02-5003A



Image to infinity

Use a C-Mount compatible lens that allows an infinity focus. Set the lens to infinity and image a distant object—10 to 15 m should suffice. Make sure the lens is firmly threaded onto the C-Mount ring. Rotate the lens and C-Mount ring until the image is focused. Carefully tighten the locking ring and recheck focus.

Lens protrusion for C-Mount cameras

Lens protrusion is the distance from outer edge of C-Mount ring to contact point of first surface internal to C-Mount ring. For color cameras this surface is the IR-filter holder, and for mono cameras this surface is the internal camera front plate (see figure 26). Table 13 presents lens protrusion values for Prosilica GE cameras with C-Mount.

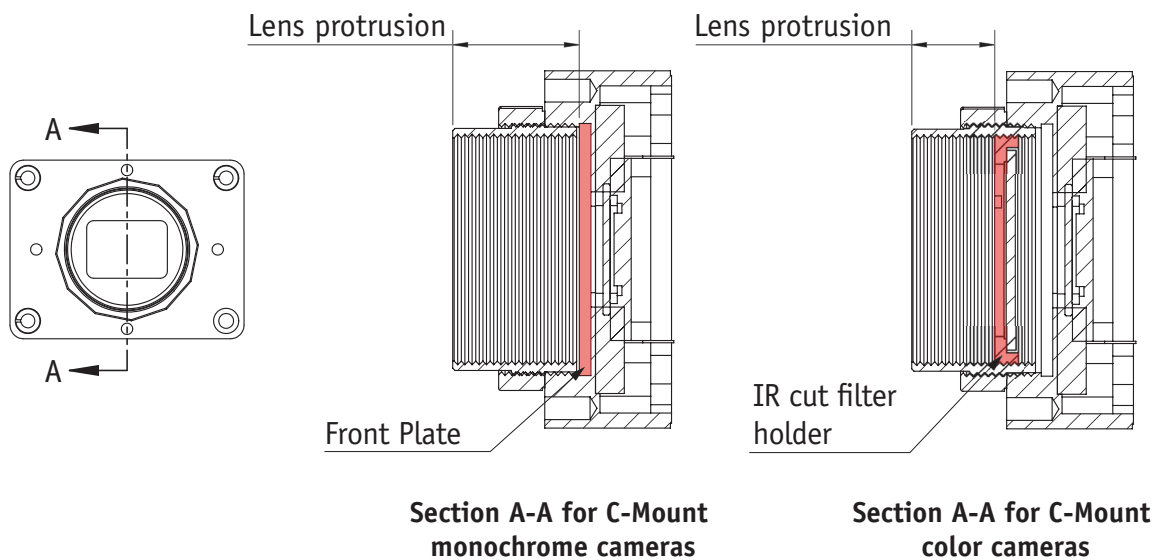


Figure 26: Cross section of typical Prosilica GE front assembly with C-Mount

Camera	Lens protrusion [mm]
GE680	13.64
GE680C	9.01
GE1050	13.64
GE1050C	9.71
GE1650	13.64
GE1650C	9.20
GE1660	13.64

Camera	Lens protrusion [mm]
GE1660C	9.67
GE1900	13.64
GE1900C	9.15
GE1910	13.64
GE1910C	9.67
GE2040	13.64
GE2040C	13.64

Table 13: Lens protrusion for Prosilica GE cameras with C-Mount

F-Mount flange focal distance

Flange focal distance is the optical distance from the mounting flange to image sensor die. Prosilica GE F-Mount cameras are optically calibrated to a standard 46.5 mm optical flange focal distance.

Adjustment of F-Mount

The F-Mount is adjusted at the factory and should not require adjusting. If for some reason, the lens mount requires adjustment, use the following method.

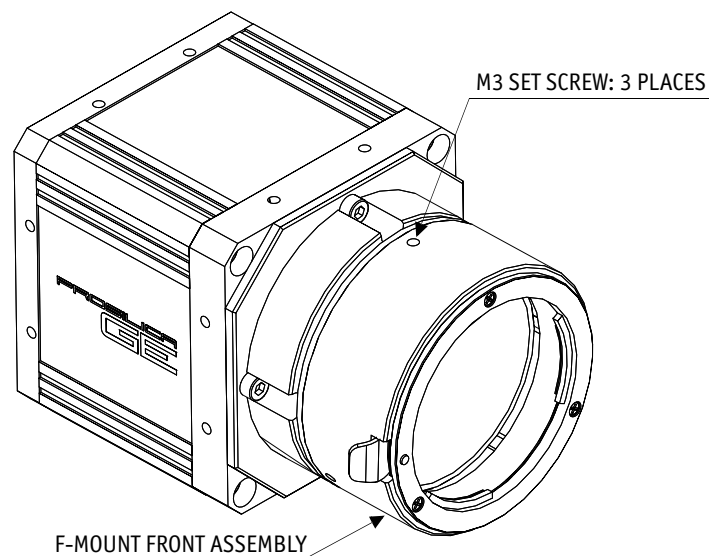


Figure 27: Prosilica GE F-Mount isometric view

Attach F-Mount compatible lens

Use an F-Mount compatible lens that allows an infinity focus. Attach the lens to the camera using a counter-clockwise rotation of about a quarter turn. The lens should snap into place such that the lens flange and camera flange mate over the full circumference.

Loosen F-Mount front assembly

Use a 1.5 mm hex wrench to loosen the 3 set screws that hold the F-Mount front assembly to the camera body.

Image to infinity

Set the lens to infinity and image a distant object—10 to 15 m should suffice. Gently move the F-Mount front until focused and lock it in place.

Camera interfaces

This chapter provides information on Gigabit Ethernet port, inputs and outputs, and trigger features.

www



Accessories:

Please contact Allied Vision sales representative or your local Allied Vision dealer for information on accessories:

<http://www.alliedvision.com/en/about-us/where-we-are.html>

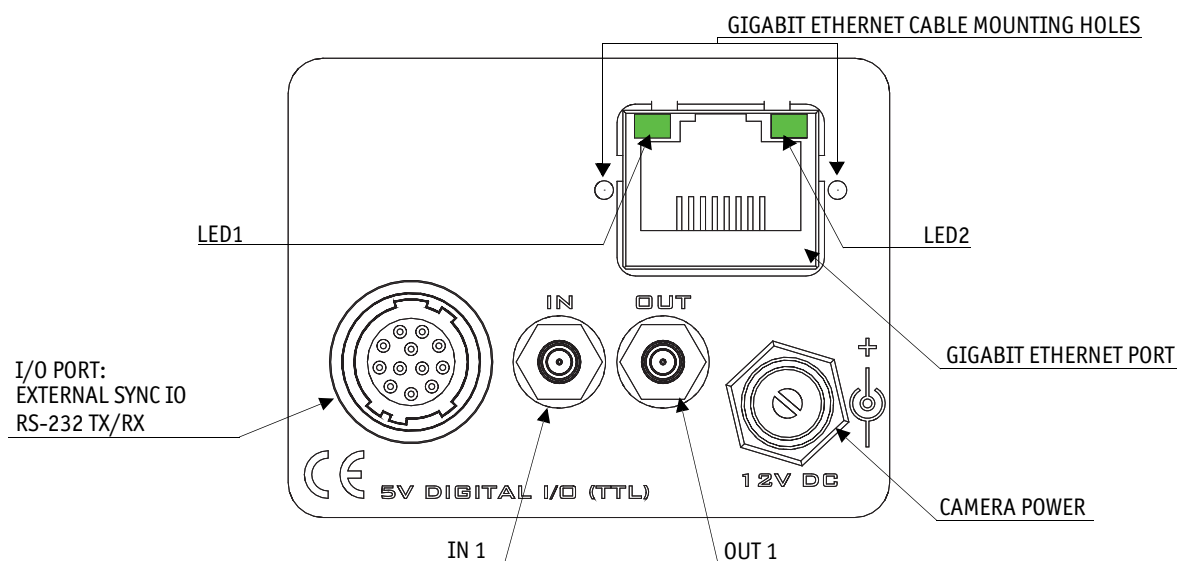


Figure 28: Prosilica GE connection ports

Status LEDs

The color of the LEDs have the following meaning:

LED color	Status	
LED1	Flashing/solid green	Ethernet activity
LED2	Flashing green	Camera is powered
	Solid green	Camera is booted, and link with the host is established

Table 14: Status of LEDs in Prosilica GE

Note



Once the camera is booted, LED2 will remain solid green as long as the camera is powered, even if connection with the host is lost.

Gigabit Ethernet port

The Gigabit Ethernet port conforms to the IEEE 802.3 1000BASE-T standard for Gigabit Ethernet over copper. Allied Vision recommends using Category 6 or higher compatible cabling and connectors for best performance.

www

GigE Installation Manual offers detailed instructions for using Prosilica GE cameras.



http://www.alliedvision.com/fileadmin/content/documents/products/cameras/various/installation-manual/GigE_Installation_Manual.pdf

Note

See **Hardware Selection for Allied Vision GigE Cameras** application note for a list of recommended Ethernet adapters:



http://www.alliedvision.com/fileadmin/content/documents/products/cameras/various/appnote/Hardware_Selection_for_Allied_Vision_GigE_Cameras.pdf

Note

A standard Ethernet adapter is available for purchase from Allied Vision:



P/N: 02-3002A
Model: Intel Pro 1000/PT

Note

Cable lengths up to 100 m are supported.



The 8-pin RJ-45 jack has the pin assignment according to the Ethernet standard (IEEE 802.3 1000BASE-T).


Note

Prosilica GE cameras support cables with horizontal locking screw connector for a secured connection (See figure 28).



Allied Vision recommends using locking-screw cables from Components Express, Inc. for a perfect fit. Visit the [CEI product configurator](#) to customize the cable according to your needs.

Camera I/O connector pin assignment



Pin	Signal	Direction	Level	Description
1	In 1	In	TTL max. 5 V	Camera input galvanic isolated (SyncIn1)
2	Out 2	Out	TTL max. 5 V	Camera output 2 galvanic isolated (SyncOut2)
3	Out 3	Out	TTL max. 5 V	Camera output 3 galvanic isolated (SyncOut3)
4	RxD RS-232	In	RS-232	Terminal receive data
5	TxD RS-232	Out	RS-232	Terminal transmit data
6	Reserved	---	---	---
7	Reserved	---	---	---
8	Reserved	---	---	---
9	Reserved	---	---	---
10	Isolated IO GND	In/Out	Common GND for In/Out	Isolated input and output signal ground
11	Isolated IO GND	In/Out	Common GND for In/Out	Isolated input and output signal ground
12	Isolated IO GND	In/Out	Common GND for In/Out	Isolated input and output signal ground

Figure 29: Camera I/O connector pin assignment

The general purpose I/O port uses a Hirose HR10A-10R-12SB connector on the camera side. The mating cable connector is Hirose HR10A-10P-12P.

Note This cable side Hirose connector can be purchased from Allied Vision.



P/N: K7600039

I/O definition

Camera power

The Prosilica GE camera family supports a wide input power voltage range. The camera will not power in reverse polarity. Exceeding the voltage range specified below will damage the camera.

Caution 5–24 V. 12 V nominal.



Note Prosilica GE has a built-in power barrel connector (Switchcraft PC712a). A 12 V power adapter with barrel connection plug (Switchcraft 760K) is available for purchase from Allied Vision:



- P/N 02-8005C North America Supply.
- P/N 02-8010C Universal Supply.

Isolated IO GND

Isolated IO GND must be connected to the user's external circuit ground if In 1, Out 1, Out 2, Out 3, RxD RS-232, and TxD RS-232 is to be used. Note that Isolated IO GND is common with power ground; however, it is good practice to provide a separate ground connection for power and signaling when designing the cabling.

RxD RS-232 and TxD RS-232

These signals are RS-232 compatible. These signals allow communication from the host system via the Ethernet port to a peripheral device connected to the camera. Note that these signals are not isolated; therefore, cabling should be carefully designed for the noisy environments.

Input triggers

In 1

In 1 allows the camera to be synchronized to an external event. The camera can be programmed to trigger on the rising edge, falling edge, both edges, or level of this signal. The camera can also be programmed to capture an image at some programmable delay time after the trigger event.

Caution Do not exceed 5.5 V on In 1.



The Mini-SMB trigger input is internally connected to the In 1 of the general purpose I/O port. The Mini-SMB port on the camera uses an Amphenol 903-406J-51R connector. A suitable mating cable connector is Amp 413985-3 which can be used with RG174 coaxial cable.

Note SMB to SMB cables is available for purchase from Allied Vision with various lengths. The 3 meter length uses the following:



P/N 02-6007A

Output signals

Out 1

This Mini-SMB trigger output is NOT internally connected to other camera output pins of the Camera I/O connector described above. This connector is particularly useful for triggering multiple cameras in a “daisy chain” fashion. It can be configured as follows:

<i>Exposing</i>	Corresponds to when camera is integrating light
<i>Trigger Ready</i>	Indicates when the camera will accept a trigger signal
<i>Trigger Input</i>	A relay of the trigger input signal used to “daisy chain” the trigger signal for multiple cameras
<i>Readout</i>	Valid when camera is reading out data
<i>Imaging</i>	Valid when camera is exposing or reading out
<i>Strobe</i>	Programmable pulse based on one of the above events
<i>GPO</i>	User programmable binary output

Any of the above signals can be set for active high or active low. The Mini-SMB port on the camera uses an Amphenol 903-406J-51R connector. A suitable mating cable connector is Amp 413985-3 which can be used with RG174 coaxial cable.

Note SMB to BNC cables is available for purchase from Allied Vision. P/N: 02-6014A



Out 2 and Out 3

Out 2 and Out 3 can be configured to active high or active low. The internal camera signals are listed as follows:

<i>Exposing</i>	Corresponds to when camera is integrating light
<i>Trigger Ready</i>	Indicates when the camera will accept a trigger signal
<i>Trigger Input</i>	A relay of the trigger input signal used to “daisy chain” the trigger signal for multiple cameras
<i>Readout</i>	Valid when camera is reading out data
<i>Imaging</i>	Valid when camera is exposing or reading out
<i>Strobe</i>	Programmable pulse based on one of the above events
<i>GPO</i>	User programmable binary output

Video iris

This signal can be used to drive the video input of a video iris lens.

Reserved

These signals are reserved for future use and should be left disconnected.

Camera I/O connector internal circuit diagram

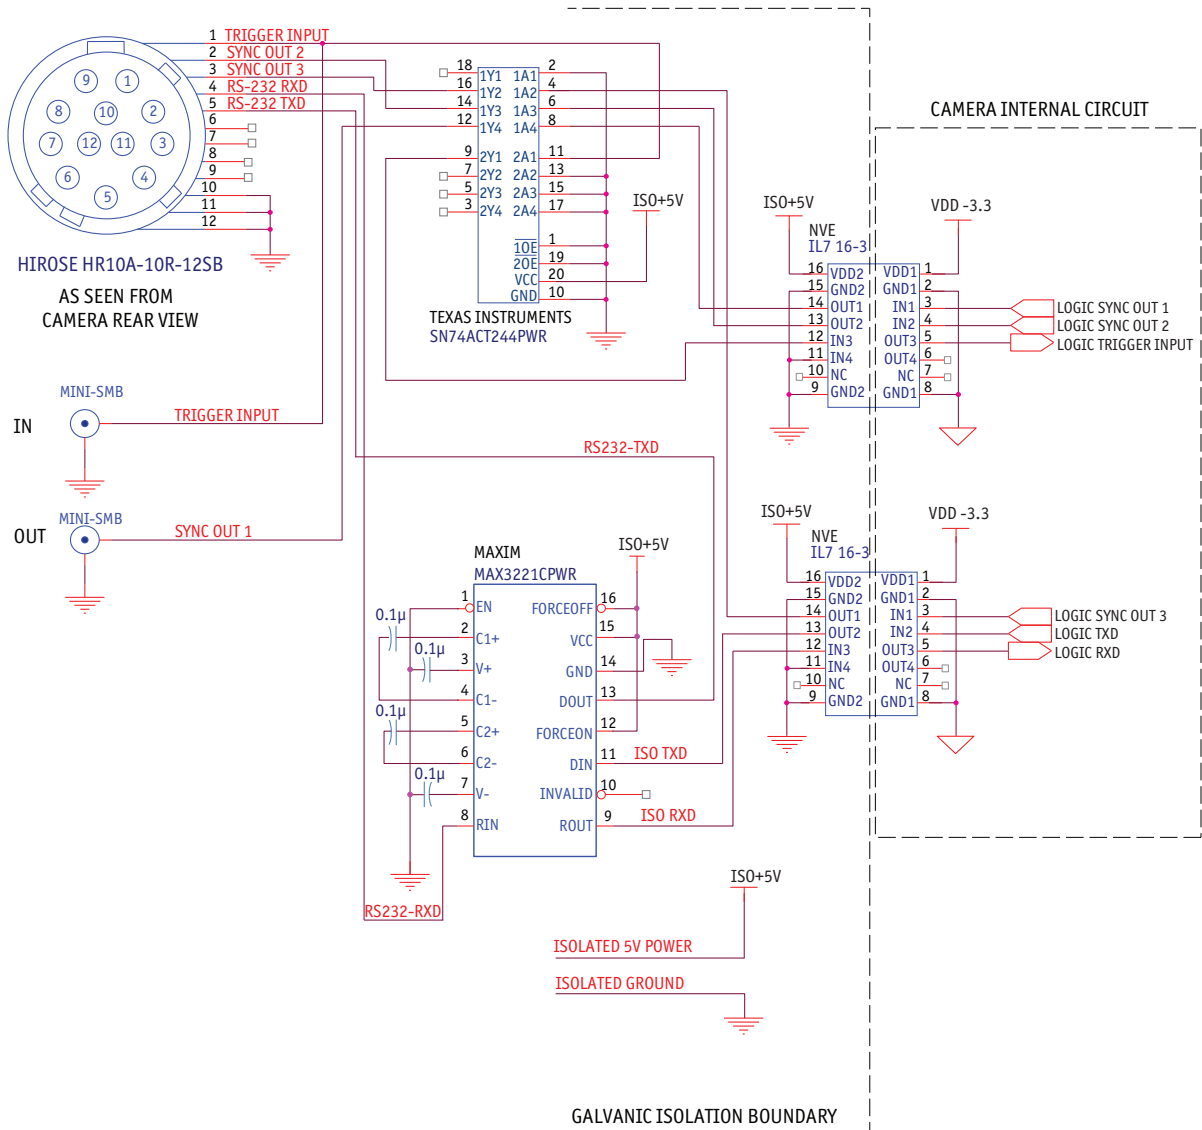


Figure 30: Prosilica GE internal circuit diagram

Maxim MAX3221CPWR

Used to drive the RS232 signal logic via the external connector.

Texas Instruments SN74ACT244PWR

Used as trigger buffer/driver. The required trigger input current is less than 10 μ A and the maximum sync output current is 24 mA.

Camera I/O connector external circuit example

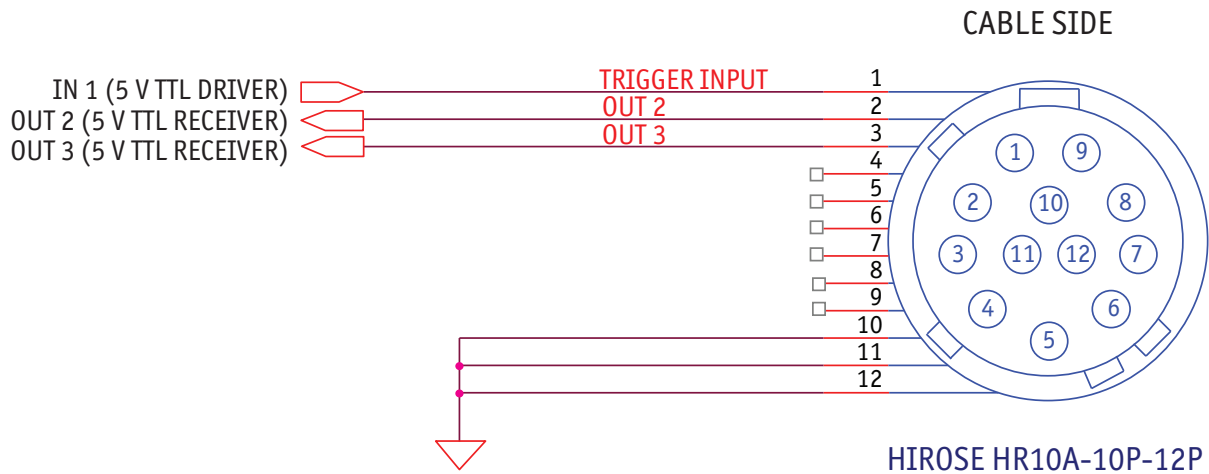


Figure 31: Prosilica GE external circuit

The trigger circuit is connected to a Texas Instruments SN74ACT244PWR buffer/driver inside the camera.

Caution



Input: Incoming trigger must be able to source 10 μ A.

Output: Sync output current is 24 mA.

In 1, Out 1 external circuit example

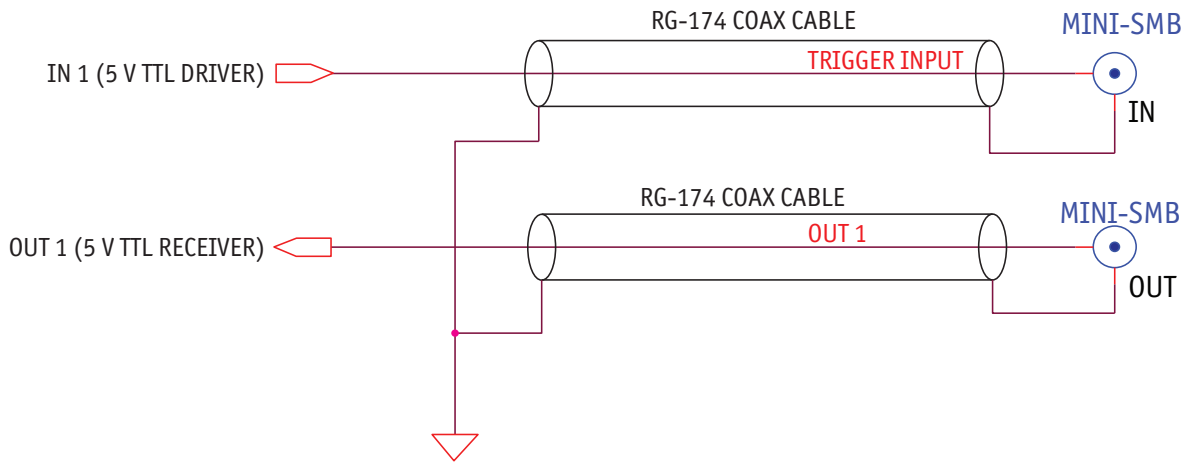


Figure 32: Prosilica GE In 1, Out 1 external circuit

The trigger circuit is connected to a Texas Instruments SN74ACT244PWR buffer/driver inside the camera. Note that the trigger input signal is not terminated to match the cable impedance.

Caution



Input: The required trigger input current is less than 10 μ A.

Output: The maximum sync output current is 24 mA.

Trigger timing diagram

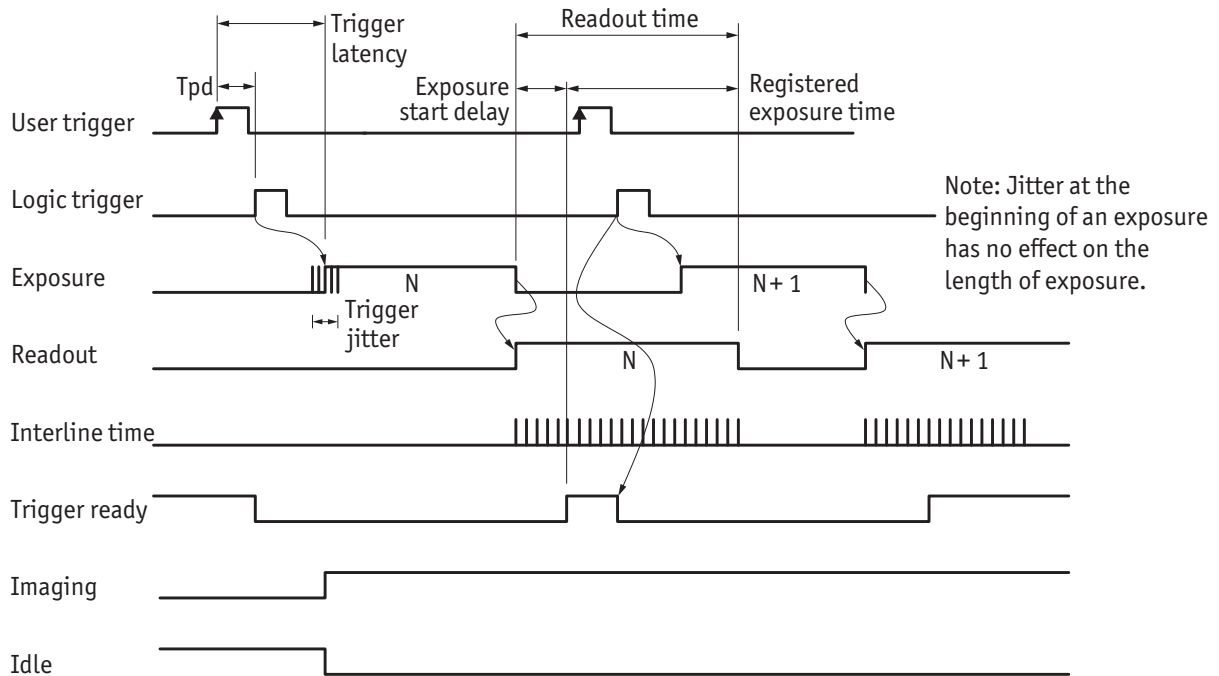


Figure 33: Prosilica GE internal signal timing waveforms

Notes on triggering

Term	Definition
<i>User trigger</i>	Trigger signal applied by the user (hardware trigger, software trigger)
<i>Logic trigger</i>	Trigger signal seen by the camera internal logic (not visible to the user)
<i>T_{pd}</i>	Propagation delay between the user trigger and the logic trigger
<i>Exposure</i>	High when the camera image sensor is integrating light
<i>Readout</i>	High when the camera image sensor is reading out data
<i>Trigger latency</i>	Time delay between the user trigger and the start of exposure
<i>Trigger jitter</i>	Error in the trigger latency time

Table 15: Explanation of signals in timing diagram

Term	Definition
<i>Trigger ready</i>	Indicates to the user that the camera will accept the next trigger
<i>Registered exposure time</i>	Exposure time value currently stored in the camera memory
<i>Exposure start delay</i>	Registered exposure time subtracted from the readout time and indicates when the next exposure cycle can begin such that the exposure will end after the current readout
<i>Interline time</i>	Time between sensor row readout cycles
<i>Imaging</i>	High when the camera image sensor is either exposing and/or reading out data
<i>Idle</i>	High if the camera image sensor is not exposing and/or reading out data

Table 15: Explanation of signals in timing diagram

Trigger rules

Note The **user trigger pulse width** should be at least three times the width of the trigger latency as indicated in Chapter [Specifications](#) on page 13.



- The **end of exposure** will always trigger the next readout.
- The **end of exposure** must always end after the current readout.
- The **start of exposure** must always correspond with the interline time if readout is true.
- **Exposure start delay** equals the readout time minus the registered exposure time.

Triggering during the idle state

For applications requiring the shortest possible *Trigger Latency* and the smallest possible *Trigger Jitter* the *User Trigger* signal should be applied when *Imaging* is false and *Idle* is true. In this case, *Trigger Latency* and *Trigger Jitter* are as indicated in the camera [specifications](#).

Triggering during the readout state

For applications requiring the fastest triggering cycle time whereby the camera image sensor is exposing and reading out simultaneously, apply the *User Trigger* signal as soon as a valid *Trigger Ready* is detected. In this case, *Trigger Latency* and *Trigger Jitter* can be up to 1 row time since *Exposure* must always begin on an *Interline* boundary.

Firmware update

Firmware updates are carried out via the GigE connection. Allied Vision provides an application for all Prosilica GE cameras that loads firmware to the camera using a simple interface. New feature introductions and product improvements motivate new firmware releases. All users are encouraged to use the newest firmware available and complete the firmware update if necessary.

www



Download the latest GigE firmware loader from the Allied Vision website:

<http://www.alliedvision.com/en/support/firmware>

www



For more information on GigE firmware update:

http://www.alliedvision.com/fileadmin/content/documents/products/cameras/various/appnote/GigE_Firmware_Update.pdf

Resolution and ROI frame rates

This section provides the performance information which identifies the impact of reducing the region of interest on the camera's maximum frame rate.

Note



- Frame rate data was generated using **StreamBytesPerSecond = 124 MB/s** and an 8 bit pixel format such as Mono8, BayerGR8, or BayerRG8. Frame rates may be lower if using network hardware incapable of 124 MB/s.
- The camera frame rate can be increased by reducing the camera's Height attribute, resulting in a decreased region of interest (ROI) or "window".
- The camera frame rate can also be increased by increasing the camera's BinningY attribute, resulting in a vertically scaled image (less overall height with same field of view).
- There is no frame rate increase with reduced width.

Prosilica GE680

$$\text{Frame rate} = \frac{1}{9.49 \mu\text{s} \times \text{Height} + 320.06 \mu\text{s}}$$

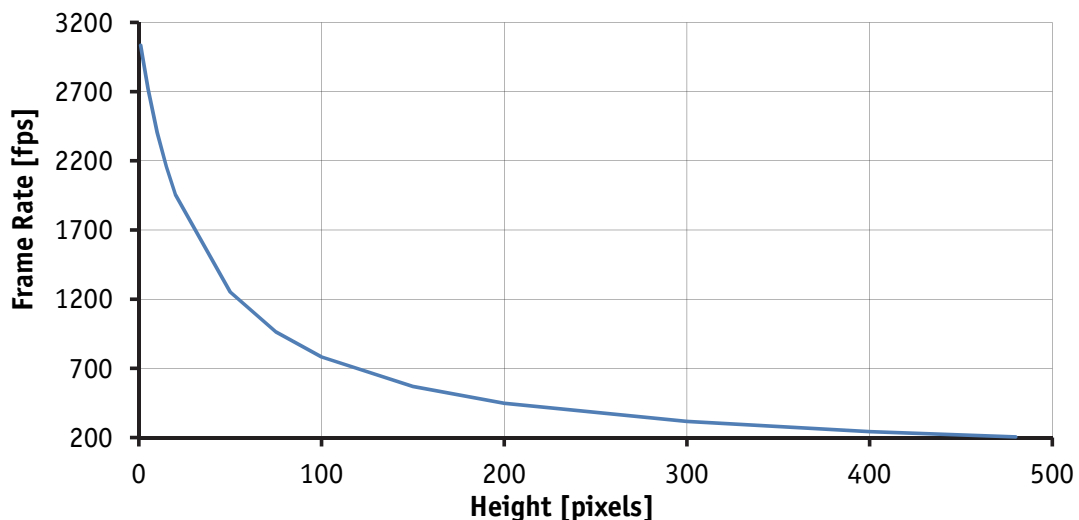


Figure 34: Frame rate vs. height for Prosilica GE680

Prosilica GE1050

$$\text{Frame rate} = \frac{1}{11.72 \mu\text{s} \times \text{Height} + 4948.66 \mu\text{s}}$$

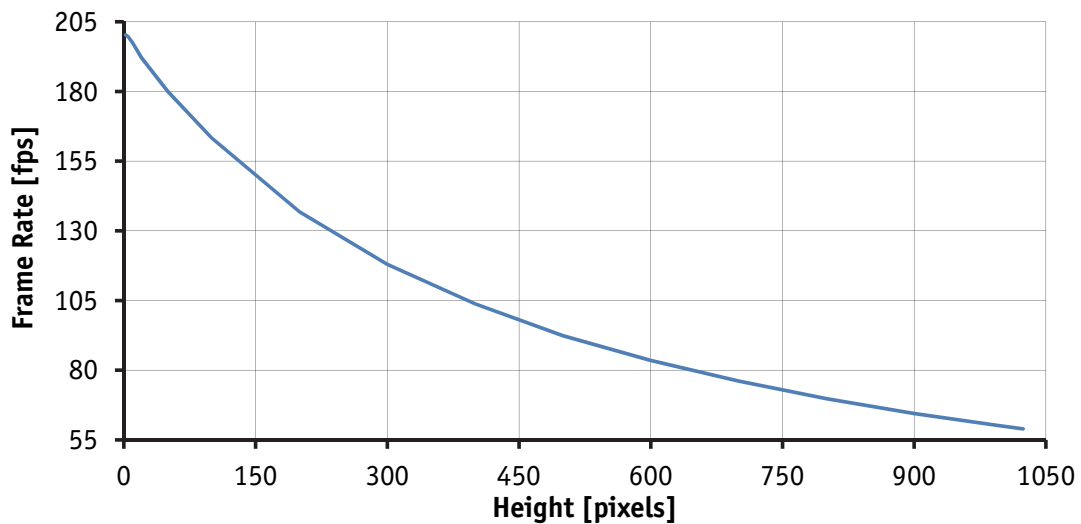


Figure 35: Frame rate vs. height for Prosilica GE1050

Prosilica GE1650

$$\text{Frame rate} = \frac{1}{17.61 \mu\text{s} \times \text{Height} + 10119.0 \mu\text{s}}$$

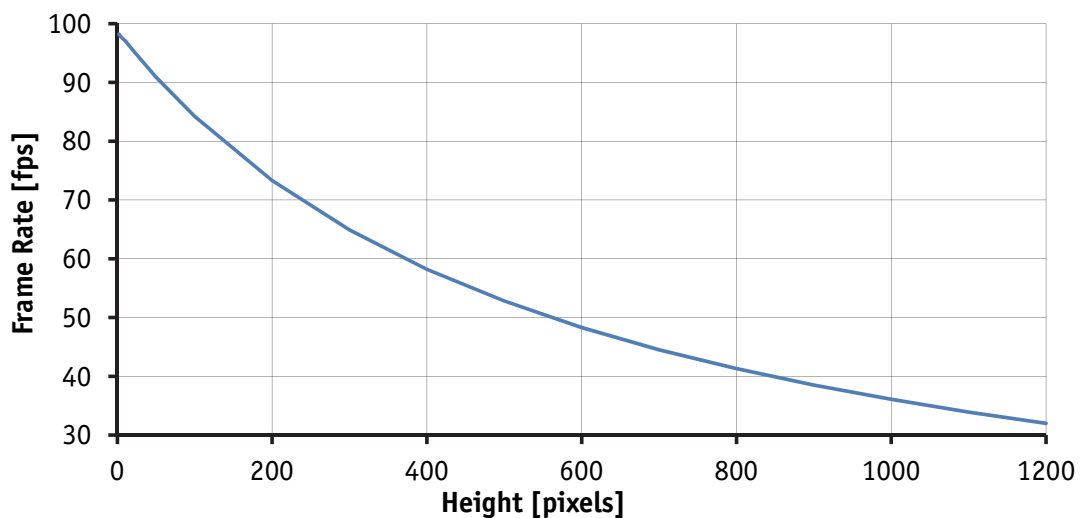


Figure 36: Frame rate vs. height for Prosilica GE1650

Prosilica GE1660

$$\text{Frame rate} = \frac{1}{17.99 \mu\text{s} \times \text{Height} + 7398.16 \mu\text{s}}$$

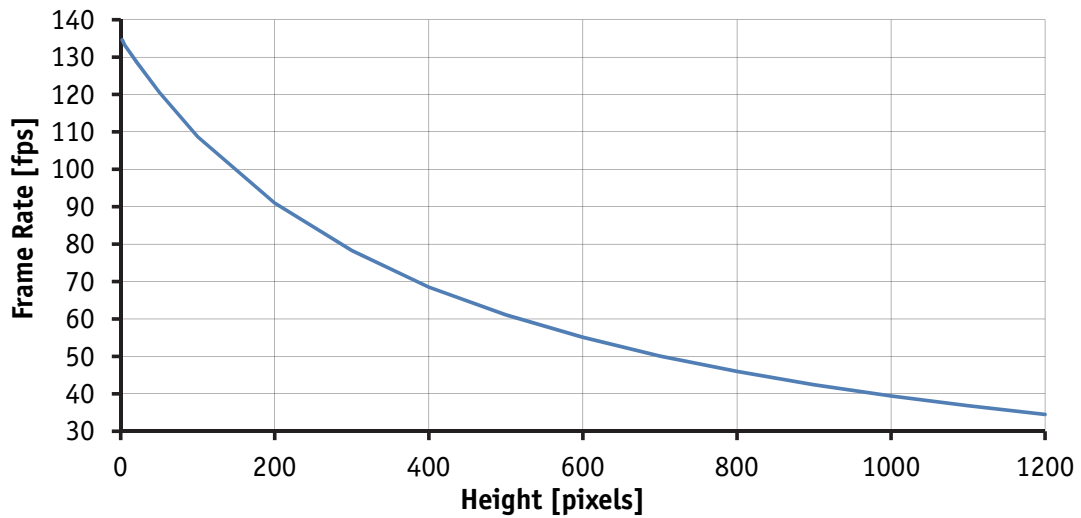


Figure 37: Frame rate vs. height for Prosilica GE1660

Prosilica GE1900

$$\text{Frame rate} = \frac{1}{18.31 \mu\text{s} \times \text{Height} + 13114.72 \mu\text{s}}$$

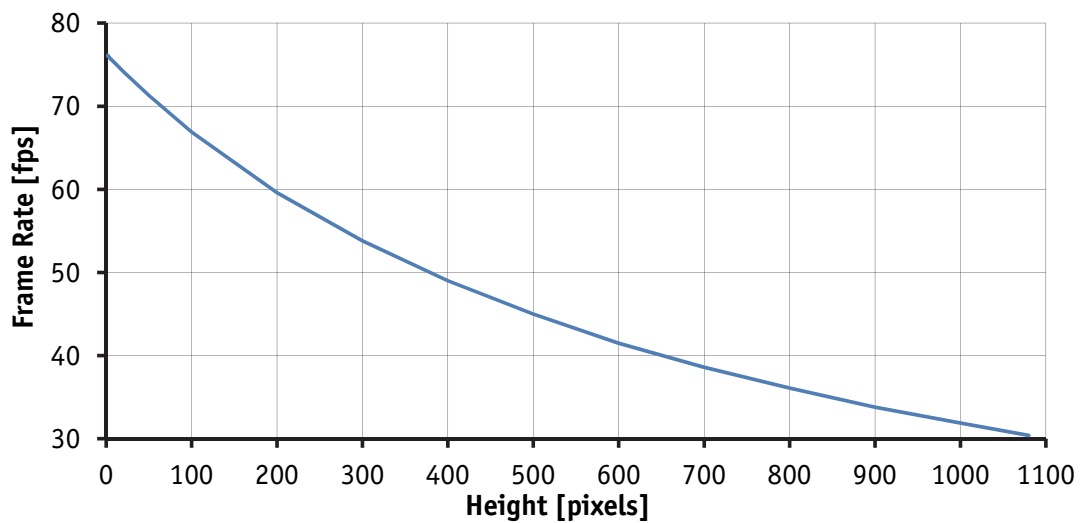


Figure 38: Frame rate vs. height for Prosilica GE1900

Prosilica GE1910

$$\text{Frame rate} = \frac{1}{21.35 \mu\text{s} \times \text{Height} + 7526.47 \mu\text{s}}$$

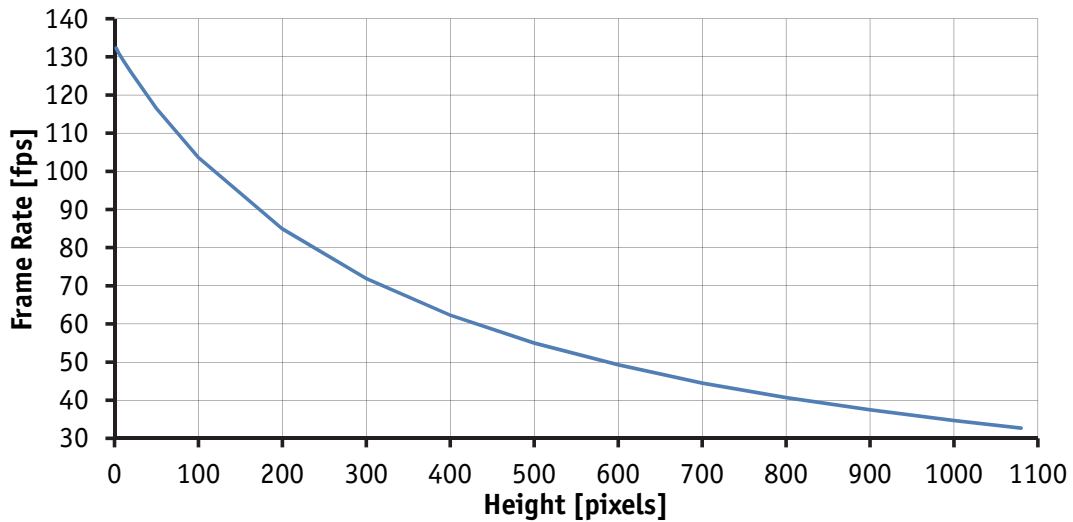


Figure 39: Frame rate vs. height for Prosilica GE1910

Prosilica GE2040

$$\text{Frame rate} = \frac{1}{15.63 \mu\text{s} \times \text{Height} + 33773.85 \mu\text{s}}$$

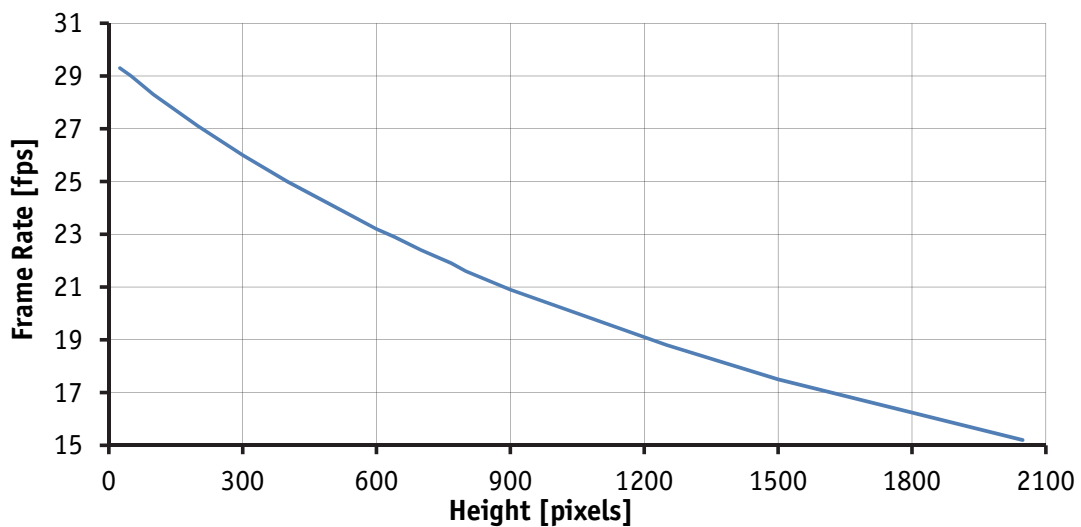


Figure 40: Frame rate vs. height for Prosilica GE2040

Prosilica GE4000

$$\text{Frame rate} = \frac{1}{52.45 \mu\text{s} \times \text{Height} + 56713.22 \mu\text{s}}$$

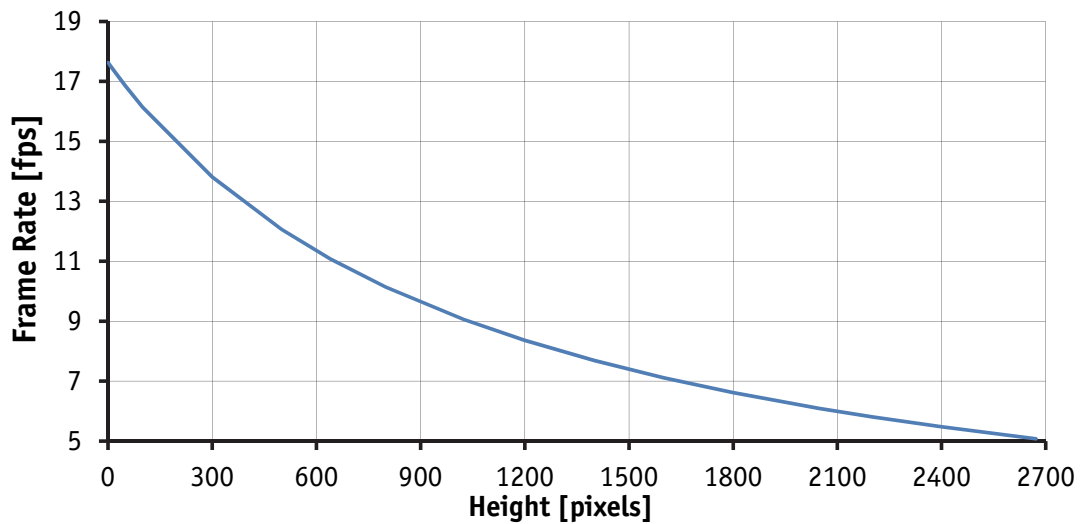


Figure 41: Frame rate vs. height for Prosilica GE4000

Prosilica GE4900

$$\text{Frame rate} = \frac{1}{70.73 \mu\text{s} \times \text{Height} + 69676.59 \mu\text{s}}$$

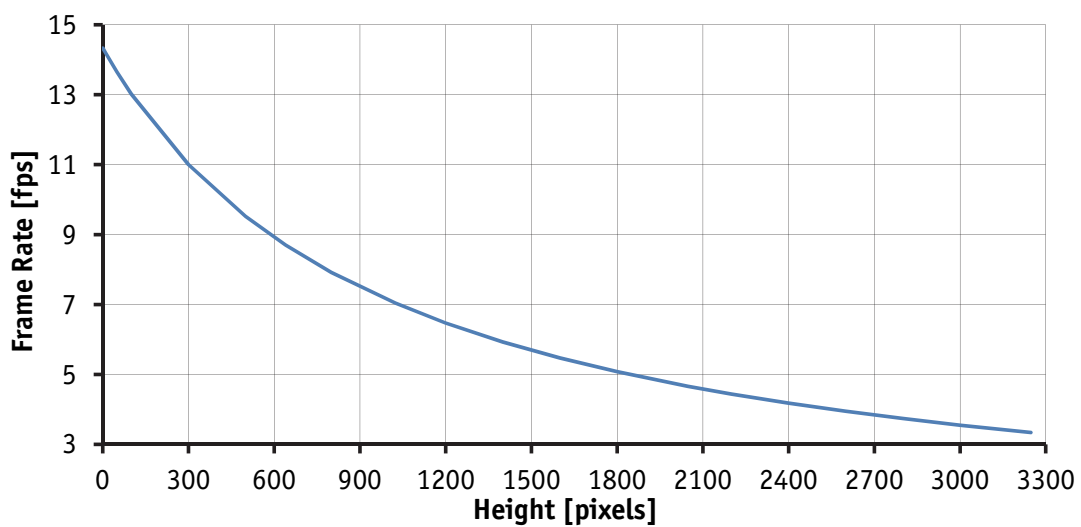


Figure 42: Frame rate vs. height for Prosilica GE4900

Prosilica GE model comparison

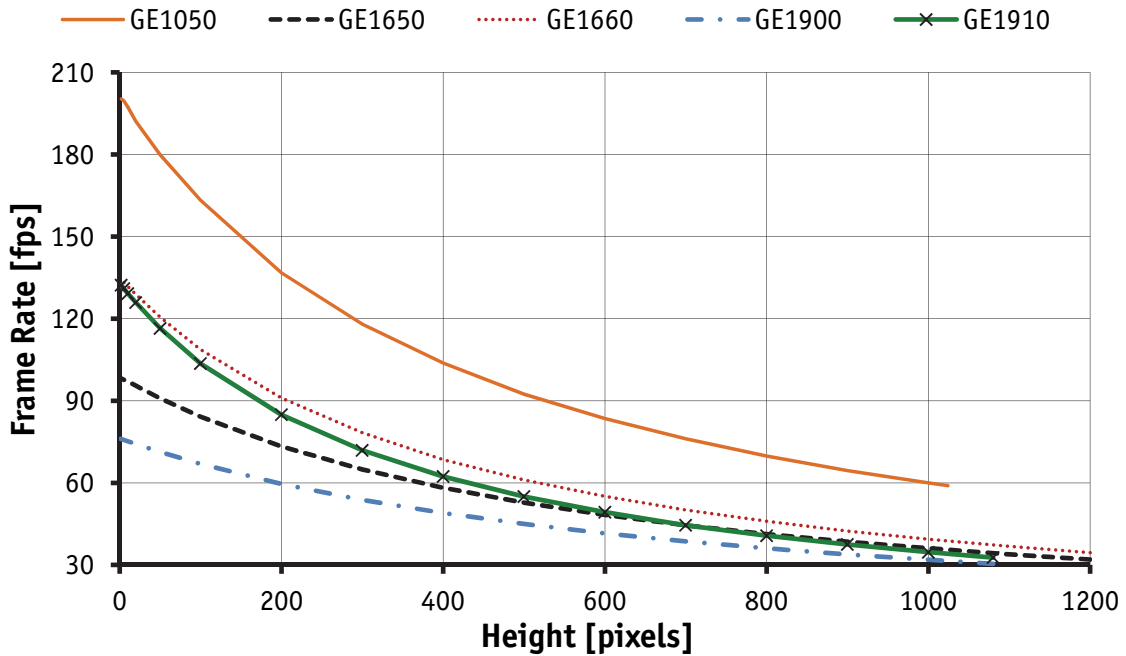


Figure 43: Maximum frame rate vs. height for select Prosilica GE camera models

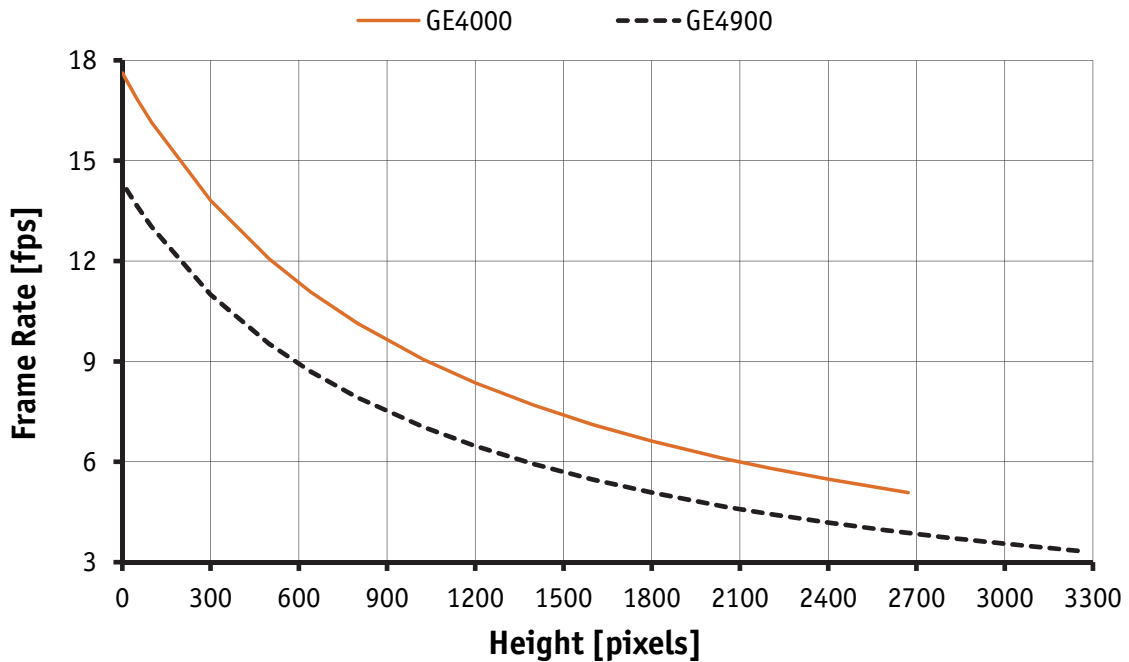


Figure 44: Maximum frame rate vs. height for Prosilica GE4000 and Prosilica GE4900

Camera data path

The following diagrams illustrate the data flow and the bit resolution of image data. The individual blocks are described in more detail in the **GigE Features Reference** document.

Prosilica GE: monochrome cameras

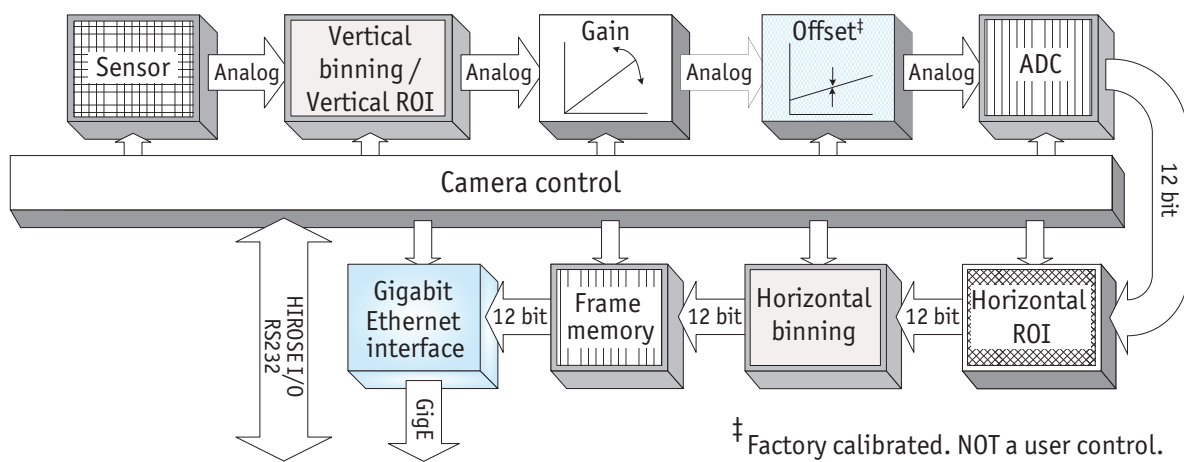


Figure 45: Block diagram of Prosilica GE monochrome cameras

Prosilica GE: color cameras

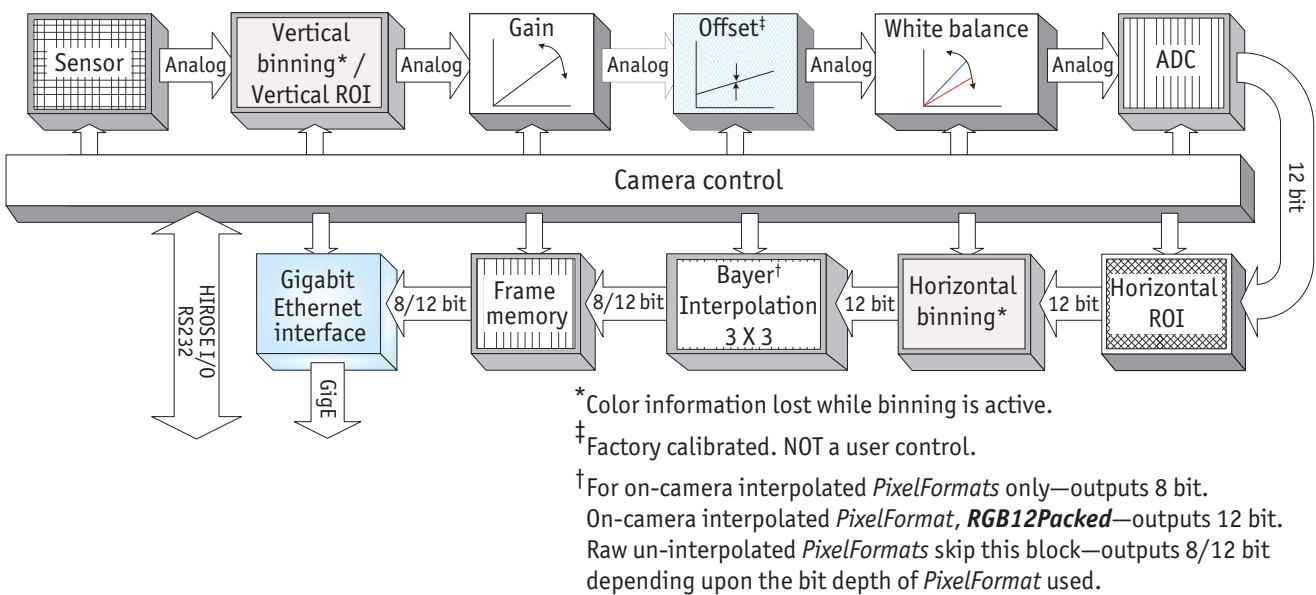


Figure 46: Block diagram of Prosilica GE color cameras

Additional references

Prosilica GE webpage

<http://www.alliedvision.com/en/products/cameras>

Prosilica GE Documentation

<http://www.alliedvision.com/en/support/technical-documentation/prosilica-ge-documentation>

VIMBA SDK

<http://www.alliedvision.com/en/products/software>

PvAPI SDK- (Under Legacy Software)

<http://www.alliedvision.com/en/support/software-downloads>

Knowledge base

<http://www.alliedvision.com/en/support/technical-papers-knowledge-base>

Case studies

<http://www.alliedvision.com/en/applications>

Firmware

<http://www.alliedvision.com/en/support/firmware>

Index

A

Adjusting	
C-Mount.....	38
F-Mount.....	40

B

Block diagram	
Prosilica GE color cameras.....	59
Prosilica GE monochrome cameras.....	59

C

Camera interfaces.....	41
CE.....	12
Cleaning optics.....	9
Copyright.....	2

D

Data path.....	59
Declaration of conformity.....	12
Document history.....	6

E

Environmental specifications.....	9
Exposing (trigger).....	51
Exposure (definition).....	50
Exposure cycle (trigger).....	51
Exposure start delay (signal).....	51

F

FCC Class A.....	12
Flange focal distance	
C-Mount.....	38
F-Mount.....	40

I

Idle (signal).....	51
Imaging (signal).....	51
Integrating light (trigger).....	50
Interline boundary.....	51
Interline time (signal).....	51

L

Legal notice.....	2
Lens protrusion.....	39
Logic trigger (definition).....	50

M

Mechanical dimensions	
Prosilica GE C-Mount.....	34
Prosilica GE F-Mount.....	35
Prosilica GE large format F-Mount.....	36
Tripod adapter.....	37
Multicast.....	31

P

Precautions.....	9
Propagation delay (trigger).....	50

R

Reading out data (trigger).....	51
Readout (definition).....	50
Readout data (trigger).....	50
Region of interest.....	31, 53
Registered exposure time (signal).....	51
Resolution and ROI frame rates	
Model comparison.....	58
Prosilica GE1050.....	54
Prosilica GE1650.....	54
Prosilica GE1660.....	55
Prosilica GE1900.....	55
Prosilica GE1910.....	56
Prosilica GE2040.....	56
Prosilica GE4000.....	57
Prosilica GE4900.....	57
Prosilica GE680.....	53
RoHS (2011/65/EU).....	12
RS232.....	43
RxD_RS232.....	43

S

Sensor row readout cycles.....	51
Specifications.....	13
Spectral sensitivity	

Prosilica GE1050	16
Prosilica GE1050C	16
Prosilica GE1650	18
Prosilica GE1650C	18
Prosilica GE1660	20
Prosilica GE1660C	20
Prosilica GE1900	22
Prosilica GE1900C	22
Prosilica GE1910	24
Prosilica GE1910C	24
Prosilica GE2040	26
Prosilica GE2040C	26
Prosilica GE4000	28
Prosilica GE4000C	28
Prosilica GE4900	30
Prosilica GE4900C	30
Prosilica GE680.....	14
Prosilica GE680C	14
Spectral transmission	
IRC30 filter	32
Status LEDs	41
StreamBytesPerSecond	53
Styles.....	8
Symbols.....	8
T	
Time delay (trigger)	50
Tpd (definition).....	50
Trademarks	2
Trigger jitter (definition)	50
Trigger latency (definition)	50
trigger ready (signal)	51
Trigger rules	51
Trigger timing diagram	50
U	
User trigger (definition)	50
W	
Warranty.....	2, 9