



GigE VISION CAMERAS

Mako G

Technical Manual

V4.4.5

**Quick links**

- [Mako G cameras at a glance](#) on page 14
- [Contact us](#) on page 16
- [Contents](#) on page 17

# Read before use

## EN - English

### Safety

Before using the camera, read these safety instructions. Observe the warnings at all times. Use the camera only as stated in the [Intended use](#) on page 34.

**CAUTION****Risk of burns**

A camera in operation can reach temperature levels which could cause burns.

**CAUTION****Injury by falling cameras or lenses**

A falling camera or lens can cause injury.

**CAUTION****Risk of cuts by sharp edges of lens mounts**

The threads of the lens mount can have sharp edges.

### Intended use

Intended use of Allied Vision product is the integration into vision systems by professionals. All Allied Vision product is sold in a B2B setting.

## DA - Dansk

### Sikkerhed

Læs sikkerhedsanvisningerne, før kameraet bruges. Overhold alle advarsler. Brug kun kameraet som anført i [Intended use](#) på side 34.



#### **FORSIGTIG**

##### **Forbrændingsfare**

Når kameraet bruges, kan det blive meget varmt og forårsage forbrændinger.



#### **FORSIGTIG**

##### **Kvæstelser, hvis kameraet eller linser falder ned**

Falder kameraet eller linsen ned, kan dette forårsage kvæstelser.



#### **FORSIGTIG**

##### **Fare for snitsår på linsemodulets skarpe kanter**

Linsemodulets gevind kan have skarpe kanter.

### Tilsigtet brug

Allied Vision produktets tilsigtede brug er en indbygning i et visionssystem, udført af fagfolk. Alle Allied Vision produkter sælges i B2B.

## DE - Deutsch

### Sicherheit

Bevor Sie die Kamera benutzen, lesen diese Sicherheitshinweise. Beachten Sie diese Hinweise immer. Verwenden Sie die Kamera nur wie beschrieben in [Intended use](#) auf Seite 34.



#### VORSICHT

##### **Gefahr von Verbrennungen**

Im Betrieb kann die Kamera Temperaturen erreichen, die zu Verbrennungen führen.



#### VORSICHT

##### **Verletzung durch fallende Kameras oder Objektive**

Eine fallende Kamera oder ein fallendes Objektiv kann Verletzungen verursachen.



#### VORSICHT

Schnitte durch scharfkantige Objektivgewinde

Objektivgewinde können scharfe Kanten haben.

### Bestimmungsgemäßer Gebrauch

Allied Vision Produkte sind bestimmt für die Integration in Bildverarbeitungssysteme durch Fachpersonal. Alle Allied Vision Produkte werden in einer B2B-Umgebung verkauft.

## ES - Español

### Seguridad

Antes de utilizar la cámara lea estas instrucciones de seguridad. Observe las advertencias en todo momento. Utilice la cámara solo tal y como se estipula en el [Intended use](#) en la página 34.



#### ATENCIÓN

##### **Riesgo de quemaduras**

Una cámara en funcionamiento puede alcanzar temperaturas que podrían provocar quemaduras.



#### ATENCIÓN

##### **Lesiones en caso de que las cámaras o las lentes se caigan**

Si una cámara o una lente se cae puede provocar lesiones.



#### ATENCIÓN

##### **Riesgo de cortes debido a los bordes afilados del objetivo**

Las roscas de los objetivos pueden tener bordes afilados.

### Uso previsto

El uso previsto del producto Allied Vision es la integración en el sistema de visión por parte de profesionales. Todos los productos Allied Vision se venden dentro de una relación B2B.

## FI - Suomi

### Turvallisuus

Lue nämä turvallisuusohjeet ennen kameran käyttöä. Noudata varoituksia joka hetki. Käytä kameraa ainoastaan kohdassa [Intended use](#) sivulla 34 kuvatulla tavalla.



#### **HUOMIO**

##### **Palovammojen vaara**

Käytössä olevan kameran saavuttamat lämpötilatasot voivat aiheuttaa palovammoja.



#### **HUOMIO**

##### **Putoavien kameroiden tai linssien aiheuttamat vammat**

Putoava kamera tai linssi voi aiheuttaa vammoja.



#### **HUOMIO**

##### **Linssien kiinnikkeiden terävien reunojen aiheuttamien viiltovammojen vaara**

Linssin kiinnikkeiden kierteiden reunat voivat olla teräviä.

### Käyttötarkoitus

Allied Vision-tuotteen käyttötarkoitus on integrointi kuvajärjestelmiin ammattilaisten toimesta. Kaikki Allied Vision-tuotteet myydään B2B-ympäristössä.

## FR - Français

### Sécurité

Veillez lire ces consignes de sécurité avant d'utiliser la caméra. Respectez continuellement les avertissements. Utilisez la caméra uniquement comme indiqué sous [Intended use](#), page 34.



#### ATTENTION

##### Risque de brûlures

Une caméra en service peut atteindre des niveaux de température susceptibles d'entraîner des brûlures.



#### ATTENTION

##### Blessures en cas de chute de caméras ou d'objectifs

La chute d'une caméra ou d'un objectif peut entraîner des blessures.



#### ATTENTION

##### Risque de coupures sur les bords tranchants des montures d'objectif

Les filetages des montures d'objectif peuvent présenter des bords tranchants.

### Utilisation prévue

L'utilisation prévue du produit Allied Vision est son intégration dans des systèmes de vision par le soin de professionnels. Tout produit Allied Vision est vendu dans un cadre B2B.

## IT - Italiano

### Sicurezza

Leggere queste istruzioni per la sicurezza prima di utilizzare la telecamera. Osservare sempre tutte le avvertenze. Utilizzare la telecamera come descritto alla sezione [Intended use](#) a pagina 34.



#### ATTENZIONE

##### **Pericolo di ustioni**

Durante il funzionamento una telecamera può raggiungere temperature elevate che possono essere causa di ustioni.



#### ATTENZIONE

##### **Lesioni dovute alla caduta di telecamere o lenti**

La caduta di una telecamera o di una lente può causare delle lesioni.



#### ATTENZIONE

##### **Pericolo di tagliarsi sui bordi affilati degli attacchi della lente**

I bordi della filettatura dell'attacco della lente possono essere affilati.

### Uso previsto

Il prodotto Allied Vision è concepito per essere integrato in sistemi di monitoraggio in campo professionale. Tutti i prodotti Allied Vision sono venduti in uno scenario B2B.



## JA – 日本語

### 安全性

本カメラを使用する前に、この安全の手引きをお読みください。常に、警告事項を守ってください。必ず、[Intended use](#) 34 ページの通りに、本カメラを使用してください。



#### 注意

##### やけどの危険性

作動中のカメラは、やけどを引き起こす温度まで熱くなる恐れがあります。



#### 注意

##### カメラまたはレンズの落下によるけが

カメラまたはレンズが落下すると、けがをする恐れがあります。



#### 注意

##### レンズマウントの鋭利な端部で切り傷の危険性

レンズマウントのギザギザの部分が鋭利である可能性があります。

### 用途

Allied Vision製品は、専門家が視覚装置に統合することを意図したものです。すべてのAllied Vision製品は、企業間取り引き用に販売されています。

## NL - Nederlands

### Veiligheid

Lees deze veiligheidsinstructies voordat u de camera gaat gebruiken. Neem deze waarschuwingen altijd in acht. Gebruik de camera uitsluitend, zoals aangegeven in het [Intended use](#) op pagina 34.



#### VOORZICHTIG

##### **Risico van verbranding**

Een camera die gebruikt wordt, kan temperatuurwaarden bereiken die brandwonden kunnen veroorzaken.



#### VOORZICHTIG

##### **Letsel door vallende camera's of lenzen**

Een vallende camera of lens kan letsel veroorzaken.



#### VOORZICHTIG

##### **Risico van snijwonden door scherpe randen van lensbevestigingen**

Het schroefdraad van de lensbevestiging kan scherpe randen hebben.

### Beoogd gebruik

Het beoogde gebruik van het Allied Vision-product is de integratie in optische systemen door professionals. Alle Allied Vision-producten worden verkocht in de B2B-markt.

## NO - Norsk

### Sikkerhet

Les disse sikkerhetsinstruksene før du bruker kameraet. Følg advarslene til en hver tid. Bruk kun kameraet i samsvar med [Intended use](#) på side 34.



#### FORSIKTIG

##### Risiko for brannskader

Et kamera i bruk kan nå temperaturnivåer som kan forårsake brannskader.



#### FORSIKTIG

##### Skade ved fallende kameraer eller linser

Et fallende kamera eller en fallende linse kan forårsake skade.



#### FORSIKTIG

##### Risiko for kutt fra skarpe kanter på linsefester

Sporene på linsefestet kan ha skarpe kanter.

### Tiltenkt bruk

Den tiltenkte bruken av Allied Vision-produktet er integrering i visjonssystemer av profesjonelle. Alle Allied Vision-produkter selges i en forretning til forretning-situasjon.

## SV - Svenska

### Säkerhet

Läs igenom säkerhetsinstruktionerna innan du använder kameran. Var hela tiden särskilt uppmärksam på varningarna. Använd enbart kameran på det sätt som anges i [Intended use](#) på sida 34.



#### VARNING

##### **Risk för brännskada**

En kamera i drift kan komma upp i temperaturer som kan orsaka brännskador.



#### VARNING

##### **Risk för skador från fallande kameror eller objektiv**

Fallande kameror eller objektiv kan förorsaka skador.



#### VARNING

##### **Risk för skärsår från vassa kanter på objektivfattningar**

Objektivets gängor kan ha vassa kanter.

### Avsedd användning

Den avsedda användningen av Allied Vision-produkter är integrering i visionssystem av fackmän. Samtliga Allied Vision-produkter säljs i en B2B-miljö.

# ZH – 英文简体中文版

## 安全需知

使用本相机前，请阅读本安全说明书。请务必遵守相关警告 和 [Intended use](#) 于第 34 页。



### 注意事项

#### 烫伤风险

相机操作过程中温度可能上升并导致烫伤风险。



### 注意事项

#### 相机或者镜头跌落造成伤害

相机或者镜头可能会跌落并造成伤害。



### 注意事项

#### 镜头接口的锐利边缘划伤风险

镜头接口螺纹边缘可能较为锐利。

## 预期用途

Allied Vision 产品的预期用途是由专业人士整合到视觉系统中。所有 Allied Vision 的产品均通过 B2B 渠道销售。

# Mako G cameras at a glance



Get an overview of Mako G camera documentation.



### Read this manual carefully

Learn how to protect your camera from damage and fully understand its functions.

Mako G is Allied Vision's ultra-compact format AIA GigE Vision compliant camera. Mako G models incorporate high quality CCD or CMOS sensors from Sony, ON Semi, Teledyne e2v, and CMOSIS/ams.

Mako G cameras are offered with either a C-Mount or CS-Mount to support a wide range of lenses. An M12-Mount (S-Mount) adapter is also available.

## Scope of delivery

Your Allied Vision camera is delivered with the following components:

- Mako G GigE Vision camera
- Download Instructions

## What else do you need?

Content	URL
GigE Features Reference, camera data sheets, Modular Concept, and 3D CAD STEP files	<a href="http://www.alliedvision.com/en/support/technical-documentation/mako-g-documentation">www.alliedvision.com/en/support/technical-documentation/mako-g-documentation</a>
Technical papers and knowledge base	<a href="http://www.alliedvision.com/en/support/technical-papers-knowledge-base">www.alliedvision.com/en/support/technical-papers-knowledge-base</a>
Camera lenses and accessories	<a href="http://www.alliedvision.com/en/products/accessories">www.alliedvision.com/en/products/accessories</a>
Download Vimba and software tools	<a href="http://www.alliedvision.com/en/support/software-downloads">www.alliedvision.com/en/support/software-downloads</a>
Download the latest GigE firmware loader and release notes.	<a href="http://www.alliedvision.com/en/support/firmware">www.alliedvision.com/en/support/firmware</a>
For details about camera warranty duration and sensor warranty terms.	<a href="http://www.alliedvision.com/en/support/warranty">www.alliedvision.com/en/support/warranty</a>

Table 1: Additional resources

# Contact us

## Website

General

[www.alliedvision.com/en/contact](http://www.alliedvision.com/en/contact)

Distribution partners

[www.alliedvision.com/en/about-us/where-we-are](http://www.alliedvision.com/en/about-us/where-we-are)

## Email

General

[info@alliedvision.com](mailto:info@alliedvision.com)

Support

[support@alliedvision.com](mailto:support@alliedvision.com)

## Sales offices

Europe, Middle East, and Africa

T// +49 36428 677-230

North and South America

Toll-free: +1 877 USA 1394

T// +1 978 225 2030

California: +1 408 721 1965

Asia-Pacific

T// +65 6634 9027

China

T// +86 21 64861133

## Headquarters

Allied Vision Technologies GmbH

Taschenweg 2a

07646 Stadtroda, Germany

T// +49 36428 677-0

F// +49 36428 677-28



# Contents

Read before use	2
EN - English	2
DA - Dansk	3
DE - Deutsch	4
ES - Español	5
FI - Suomi	6
FR - Français	7
IT - Italiano	8
<b>JA - 日本語</b>	9
NL - Nederlands	10
NO - Norsk	11
SV - Svenska	12
ZH - 英文简体中文版	13
<b>Mako G cameras at a glance</b>	<b>14</b>
Scope of delivery	15
What else do you need?	15
<b>Contact us</b>	<b>16</b>
<b>Document history and conventions</b>	<b>22</b>
Document history	23
Manual conventions	28
Typographic styles	28
Product naming	29
Acronyms and terms	30
<b>Compliance, safety, and intended use</b>	<b>31</b>
Compliance notifications	32
For customers in Canada	33
Pour utilisateurs au Canada	33
Avoid electromagnetic interferences	33
Intended use	34
Copyright and trademarks	34
Your safety	35
Handling lens mounts	35
Handling hot cameras	35
Providing optimum heat dissipation	35
Camera mounting	36
Product safety	37
Electrical connections	37
Optical components	38
<b>Installing the camera</b>	<b>39</b>
Touching hot cameras	40

Electrostatic discharge .....	40
Mounting the camera .....	40
Mounting the lens .....	41
Lens load .....	43
Configuring the host computer .....	43
Installing the NIC driver .....	43
Optional: Modifying the NIC IP address .....	44
Optimize system performance .....	44
Enabling jumbo packets .....	45
Connecting your camera .....	45
Powering up the camera .....	46
Powering the camera via Hirose I/O port .....	47
Powering the camera via PoE .....	47
Connecting to host application .....	48
Allied Vision software .....	48
Third-party software .....	48
Configuring your camera .....	49
Accessories .....	49
<b>Specifications</b> .....	<b>50</b>
Applied standards .....	51
GigE Vision® .....	51
GenICam™ .....	51
IP class .....	51
Shock and vibration .....	51
Notes on specifications .....	52
Dimensions and mass .....	52
Frame memory .....	52
Resolution and ROI frame rate .....	52
Absolute QE plots .....	53
Spectral response plots .....	54
Specifications common to all models .....	55
Mako G-030 series .....	56
Absolute QE .....	58
Spectral response .....	58
ROI frame rate .....	59
Mako G-032 series .....	60
Absolute QE .....	62
Spectral response .....	62
ROI frame rate .....	63
Mako G-040 series .....	64
Absolute QE .....	66
Spectral response .....	66
ROI frame rate .....	67
Mako G-125 series .....	68
Absolute QE .....	70
Spectral response .....	70
ROI frame rate .....	71
Mako G-131 series .....	72

Absolute QE . . . . .	74
Spectral response . . . . .	74
ROI frame rate . . . . .	75
Mako G-158 series . . . . .	76
Absolute QE . . . . .	78
Spectral response . . . . .	78
ROI frame rate . . . . .	79
Mako G-192 series . . . . .	80
Absolute QE . . . . .	82
Spectral response . . . . .	82
ROI frame rate . . . . .	83
Mako G-223 series . . . . .	84
Absolute QE . . . . .	86
Spectral response . . . . .	87
ROI frame rate . . . . .	88
Mako G-234 series . . . . .	89
Absolute QE . . . . .	91
Spectral response . . . . .	91
ROI frame rate . . . . .	92
Mako G-319 series . . . . .	94
Absolute QE . . . . .	96
Spectral response . . . . .	96
ROI frame rate . . . . .	97
Mako G-419 series . . . . .	98
Absolute QE . . . . .	100
Spectral response . . . . .	101
ROI frame rate . . . . .	102
Mako G-503 series . . . . .	103
Absolute QE . . . . .	105
Spectral response . . . . .	105
ROI frame rate . . . . .	106
Mako G-507 series . . . . .	107
Absolute QE . . . . .	109
Spectral response . . . . .	109
ROI frame rate . . . . .	110
Mako G-508B POL . . . . .	111
Absolute QE . . . . .	113
Spectral response . . . . .	113
Polarization coding diagram . . . . .	114
ROI frame rate . . . . .	115
Camera feature comparison . . . . .	116
Mechanical dimensions . . . . .	118
C-Mount (default) . . . . .	118
CS-Mount . . . . .	118
M12-Mount (S-Mount) . . . . .	119
Tripod adapter . . . . .	119
Sensor position accuracy . . . . .	120
Lens mount cross section . . . . .	121

C-Mount with 22 mm filter (default) .....	121
CS-Mount with 22 mm filter .....	122
M12-Mount (S-Mount) with 22 mm filter .....	122
C-Mount with 16 mm filter .....	122
CS-Mount with 16 mm filter .....	123
M12-Mount (S-Mount) with 16 mm filter .....	123
Dimensional adjustment .....	123
<b>Filter and lenses</b> .....	<b>124</b>
Camera lenses .....	125
Mako G-030 series .....	125
Mako G-032 series .....	126
Mako G-040 series .....	126
Mako G-131 series .....	127
Mako G-158 series .....	127
Mako G-192 series .....	128
Mako G-223 series .....	128
Mako G-234 series .....	129
Mako G-319 series .....	129
Mako G-419 series .....	130
Mako G-503 series .....	130
Mako G-507 series .....	131
Mako G-508B POL .....	131
Optical filters .....	132
<b>Camera interfaces</b> .....	<b>133</b>
Back panel .....	134
Status LEDs .....	134
Gigabit Ethernet port .....	135
Camera I/O connections .....	135
Input block diagram .....	137
Output block diagram .....	138
Control signals .....	140
Input block diagram .....	140
Output signals .....	140
Camera trigger .....	142
Trigger timing diagram .....	142
Trigger definitions .....	143
Trigger rules .....	143
Triggering during the idle state .....	144
Triggering during the readout state .....	144
<b>Image data flow</b> .....	<b>145</b>
Mako G model series with CCD sensors .....	146
Mako G-032 and G-125 series .....	146
Mako G model series with CMOS sensors .....	147
Mako G-030 series .....	147
Mako G-131 and G-192 series .....	148
Mako G-223 and G-419 series .....	149

Mako G-040, G-158, G-234, G-319, G-507 series and G-508B POL . . . . .	150
Mako G-503 series . . . . .	151
Color interpolation (Bayer demosaicing). . . . .	152
<b>Cleaning optical components</b>	<b>154</b>
Keeping optical components clean . . . . .	155
Identifying impurities . . . . .	156
Locating impurities . . . . .	156
Removing the IR cut filter. . . . .	157
Materials for cleaning optical components. . . . .	158
Cleaning Instructions. . . . .	159
Cleaning with compressed air . . . . .	160
<b>Firmware update</b>	<b>161</b>
<b>Index</b>	<b>166</b>

# Document history and conventions



This chapter includes:

- Document history
- Layout styles and symbols used in this manual
- Product naming
- Acronyms and terms used in this manual

# Document history

Version	Date	Remarks
V4.4.5	2020-Jun-05	<ul style="list-style-type: none"> <li>Added <a href="#">Read before use</a> on page 2</li> <li>Added <a href="#">Your safety</a> on page 35</li> <li>Added <a href="#">Product safety</a> on page 37</li> <li>Added order codes for new power supplies</li> <li>Added time between exposure values for Mako G-030, G-032, G-125, G-131, G-192, G-223, G-419, and G-503</li> <li>Updated <a href="#">Installing the camera</a> on page 39</li> <li>Editorial changes</li> </ul>
V4.4.4	2020-Jan-20	<ul style="list-style-type: none"> <li>Updated <a href="#">Intended use</a> on page 34</li> <li>Updated <a href="#">Compliance notifications</a> on page 32</li> <li>Added heavy lens information</li> <li>Editorial changes</li> </ul>
V4.4.3	2019-Aug-25	<ul style="list-style-type: none"> <li>IEEE 1588 Precision Time Protocol (PTP) and Trigger over Ethernet (ToE) Action Commands features are added to Mako G-030, G-223, and G-419 series with firmware version 01.54.26005</li> <li>Changed the IR cut filter section to Optical filters and included all optical filters available for the Mako G camera family</li> <li>Corrected Canadian ICES compliance statement</li> <li>Updated technical drawings</li> <li>Added content to Mounting the camera section</li> <li>Editorial changes</li> </ul>
V4.4.2	2019-Mar-08	<ul style="list-style-type: none"> <li>Initial commercial release: <a href="#">Mako G-508B POL</a> on page 111               <ul style="list-style-type: none"> <li>Sony IMX250MZR CMOS sensor</li> <li>Specifications, chief ray angle, absolute QE, ROI frame rate</li> </ul> </li> <li>Added shock and vibration information</li> <li>Added color interpolation content to Image Data Flow chapter</li> <li>Editorial changes</li> </ul>
V4.4.1	2019-Jan-31	<ul style="list-style-type: none"> <li>IEEE 1588 Precision Time Protocol (PTP) and Trigger over Ethernet (ToE) Action Commands features are added to Mako G-040, G-158, G-234, G-319, and G-507 series with firmware version 01.54.21000</li> <li>Updated Mako G-040, G-158, G-234, G-319, and G-507 series specifications (firmware version 01.54.21000), see the GigE Firmware Release Notes for details of the changes</li> <li>Added trigger latency and trigger jitter values for Mako G-223 and G-419 series</li> <li>Corrected Mako G-040 series streamhold capacity value</li> <li>Added content to installation chapter: Powering the camera via PoE</li> <li>Corrected Mako G 2D technical drawings</li> <li>Corrected lens mount cross section drawings</li> <li>Added Mounting the camera to Hardware and Installation chapter</li> <li>Added Supplier Declaration of Conformity to Compliance and intended use chapter</li> </ul>

Table 2: Document history (sheet 1 of 5)

Version	Date	Remarks
V4.4.1	2019-Jan-31 (Continued)	<ul style="list-style-type: none"> <li>Added camera electronics damage notice table to Installation and hardware chapter</li> <li>Various other minor enhancements and corrections</li> </ul>
V4.4.0	2018-Jul-11	<ul style="list-style-type: none"> <li>Initial commercial release: <a href="#">Mako G-040 series</a> on page 64               <ul style="list-style-type: none"> <li>Sony IMX287 CMOS sensor</li> <li>Specifications, chief ray angle, absolute QE, spectral response, ROI frame rate</li> </ul> </li> <li>Initial commercial release: <a href="#">Mako G-158 series</a> on page 76               <ul style="list-style-type: none"> <li>Sony IMX273 CMOS sensor</li> <li>Specifications, chief ray angle, absolute QE, spectral response, ROI frame rate</li> </ul> </li> <li>Updated installation chapter</li> <li>Updated symbols used in this manual</li> <li>Updated RoHS statement to include amendment 2015/863/EU</li> <li>Added abbreviations and acronyms used in this manual</li> <li>Various other minor enhancements and corrections</li> </ul>
V4.3.3	2017-Dec-11	<ul style="list-style-type: none"> <li>Added Removing IR cut filter section to cleaning chapter</li> <li>Added Specifications common to all models to simplify the model specific tables</li> <li>Simplified the Contact us section, click the link to find contact information for your region or email us at one of the provided email addresses</li> <li>Various other minor enhancements and corrections</li> </ul>
V4.3.2	2017-Jul-31	<ul style="list-style-type: none"> <li>Mako G-223 and G-419 series: Removed <b>RGBA8Packed</b> and <b>BGRA8Packed</b> pixel formats</li> <li>Mako G-234 series: Added <b>Mono12</b> and <b>Mono12Packed</b></li> <li>Corrected user trigger pulse statement</li> <li>Updated camera images to reflect the new black powder coating housing. For more information, see PCN-2017-03-05</li> <li>CMOSIS renamed to CMOSIS/ams following the acquisition of CMOSIS by ams Sensors Belgium</li> <li>e2v renamed to Teledyne e2v following the acquisition of e2v by Teledyne Technologies Inc.</li> <li>Corrected user trigger rules</li> <li>Corrected exposure control values for Mako G-223 series</li> <li>Updated technical drawing</li> <li>Updated camera dimensions in specification tables</li> <li>Changed cell size terminology to pixel size</li> </ul>
V4.3.1	2017-Apr-07	<ul style="list-style-type: none"> <li>Added cable color to camera I/O connector pin assignment including pin assignment figure and cross reference to the Allied Vision I/O cable data sheet</li> </ul>

Table 2: Document history (sheet 2 of 5)



Version	Date	Remarks
V4.3.0	2017-Mar-13	<ul style="list-style-type: none"> <li>Added Piecewise Linear HDR option to Exposure Mode for the Mako G-223 and G-419 series. For more information, see the GigE Features Reference.</li> <li>Various minor corrections</li> </ul>
V4.2.3	2016-Dec-21	<ul style="list-style-type: none"> <li>Added missing absolute QE plots for NIR wavelength (Mako G-223B NIR and Mako G-419B NIR)</li> </ul>
V4.2.2	2016-Nov-23	<ul style="list-style-type: none"> <li><b>BinningHorizontalMode</b> and <b>BinningVerticalMode</b> options <i>Sum</i> and <i>Average</i> are supported by Mako G-131, G-192, and G-503 series</li> <li>Updated the absolute QE plot and added a spectral response plot for the Mako G-032</li> </ul>
V4.2.1	2016-Nov-08	<ul style="list-style-type: none"> <li>Corrected typographic issues</li> <li>Corrected Mako G-503 shutter type</li> </ul>
V4.2.0	2016-Nov-07	<ul style="list-style-type: none"> <li>Initial commercial release: <a href="#">Mako G-319 series</a> on page 94                             <ul style="list-style-type: none"> <li>Sony IMX265 CMOS sensor</li> <li>Specifications, absolute QE, spectral response, ROI frame rate information, camera lens information, and image data flow</li> </ul> </li> <li>Added missing information in specification tables</li> </ul>
V4.1.0	2016-Oct-12	<ul style="list-style-type: none"> <li>Initial commercial release: <a href="#">Mako G-507 series</a> on page 107                             <ul style="list-style-type: none"> <li>Sony IMX264 CMOS sensor</li> <li>Specifications, absolute QE, spectral response, ROI frame rate information, camera lens information, and image data flow</li> </ul> </li> <li>Added a tripod adapter warning message</li> <li>Updated absolute QE plots for models with Sony sensors</li> <li>Added spectral response plots for models with Sony sensors</li> <li>Added optical filter information to specification tables</li> <li>Added overlapping trigger note for Mako G-131 and G-192 in Specifications chapter and Camera interfaces chapter</li> <li>Updated image flow diagrams</li> <li>Updated Mako G-234 series specifications</li> <li>Added 10-bit, 12-bit switchability to Mako G-234 series</li> </ul>
V4.0.0	2015-Nov-24	<ul style="list-style-type: none"> <li>Changed the technical manual layout</li> <li>Changed chapter name from Camera data path to Image data flow</li> <li>Changed chapter name from Camera dimensions to Mechanical dimensions</li> <li>Merged the Resolution and ROI frame rate chapter of V3.2.0 into Specifications chapter</li> <li>Added Mako G at a glance section</li> <li>Added General safety notes section</li> <li>Added Regulations section in Safety and regulations chapter to replace Legal notice and Safety and regulations sections in V3.2.0</li> <li>Moved Sensor position accuracy section from Appendix to Mechanical dimensions chapter</li> <li>Added Cleaning optical components chapter to replace Camera cleaning section of V3.2.0</li> </ul>

Table 2: Document history (sheet 3 of 5)

Version	Date	Remarks
V4.0.0	2015-Nov-24 (Continued)	<ul style="list-style-type: none"> <li>• Added Contact us section to replace Contacting Allied Vision section of V3.2.0</li> <li>• Deleted Appendix</li> <li>• Added Camera feature comparison section in Specifications chapter to replace Camera smart features and Camera features sections in V3.2.0</li> <li>• Added Cross section: C-Mount and CS-Mount section to replace Cross section:               <ul style="list-style-type: none"> <li>- C-Mount and Cross section: CS-Mount sections in V3.2.0</li> </ul> </li> <li>• Initial commercial release: <a href="#">Mako G-234 series</a> on page 89               <ul style="list-style-type: none"> <li>- Sony IMX249 CMOS sensor</li> <li>- Specifications, absolute QE, spectral response, ROI frame rate information, camera lens information, and image data flow</li> </ul> </li> <li>• Removed references to Mako G-050 and G-095 series. The last time shipment period ends on December 31, 2015 as detailed in PCN 2015-05-03.</li> <li>• Updated Camera Interfaces chapter</li> </ul>
V3.2.0	2015-Mar-20	<ul style="list-style-type: none"> <li>• Replaced old links with new Allied Vision website links</li> <li>• Changed file name from GigE Camera and Driver Features to GigE Features Reference</li> </ul>
V3.1.0	2015-Mar-10	<ul style="list-style-type: none"> <li>• Initial commercial release: <a href="#">Mako G-503 series</a> on page 103               <ul style="list-style-type: none"> <li>- ON Semi MT9P031/MT9P006 CMOS sensor</li> <li>- Specifications, absolute QE, ROI frame rate information, camera lens information, and image data flow</li> </ul> </li> <li>• Added camera lens information</li> <li>• Added ROI frame rate section</li> <li>• Updated Image data flow and Mechanical dimensions chapters</li> </ul>
V3.0.0	2015-Jan-15	<ul style="list-style-type: none"> <li>• Initial commercial release: <a href="#">Mako G-030 series</a> on page 56               <ul style="list-style-type: none"> <li>- CMOSIS/ams CMV300 CMOS sensor</li> <li>- Specifications, absolute QE, ROI frame rate information, camera lens information, and image data flow</li> </ul> </li> <li>• Initial commercial release: <a href="#">Mako G-131 series</a> on page 72               <ul style="list-style-type: none"> <li>- Teledyne e2v EV76C560 CMOS sensor</li> <li>- Specifications, absolute QE, ROI frame rate information, camera lens information, and image data flow</li> </ul> </li> <li>• Initial commercial release: <a href="#">Mako G-192 series</a> on page 80               <ul style="list-style-type: none"> <li>- Teledyne e2v EV76C570 CMOS sensor</li> <li>- Specifications, absolute QE, ROI frame rate information, camera lens information, and image data flow</li> </ul> </li> <li>• Updated Allied Vision logo</li> <li>• Updated Cleaning optical components chapter</li> <li>• Updated Mako G camera smart features table</li> <li>• Added camera lens information</li> <li>• Added ROI frame rate, ROI frame rate, and ROI frame rate sections</li> <li>• Updated Image data flow and Mechanical dimensions chapters</li> </ul>

Table 2: Document history (sheet 4 of 5)

Version	Date	Remarks
V2.1.0	2014-Oct-07	<ul style="list-style-type: none"> <li>• Updated and rearranged Notes on specifications section</li> <li>• Added Camera features comparison</li> <li>• Added trigger latency and jitter values for Mako G-032 and G-125 series</li> <li>• Updated Mako G standard housing drawing</li> <li>• Updated Mako G-503C section</li> <li>• Added camera lens information</li> <li>• Updated image data flow and mechanical dimensions chapters</li> </ul>
V2.0.4	2014-Feb-28	<ul style="list-style-type: none"> <li>• Updated available color pixel formats for Mako G-223 and G-419 series</li> <li>• Updated optional accessories in the Notes on specifications section</li> <li>• Updated section Cross section: C-Mount and CS-Mount</li> <li>• Added section Heat dissipation</li> <li>• Updated the operating temperature specification for Mako G-032, G-125, G-223, and G-419 series</li> <li>• Updated block diagrams in Image data flow to remove the RS232 reference</li> <li>• Added Hirose cable information</li> </ul>
V2.0.3	2013-Nov-27	<ul style="list-style-type: none"> <li>• Updated gain control values for Mako G-223 and G-419 series</li> <li>• Updated Status LED 2 table</li> <li>• Updated the note on <b>StreamHoldCapacity</b> in Notes on specifications and frame memory sections</li> <li>• Updated block diagrams in Image data flow chapter</li> <li>• Updated the Index</li> </ul>
V2.0.2	2013-Sep-16	<ul style="list-style-type: none"> <li>• Updated the frame rate information for Mako G-223 and G-419 series in the Specifications chapter</li> <li>• Updated introduction to include link to Mako G documentation webpage</li> <li>• Updated Status LEDs section</li> <li>• Added captions to tables in camera lenses section</li> <li>• Added links to GigE Camera and Driver Features document</li> </ul>
V2.0.1	2013-Sep-11	<ul style="list-style-type: none"> <li>• Added table of contents</li> <li>• Added camera cleaning chapter</li> <li>• Updated the specifications for Mako G-223 and G-419 series</li> </ul>
V2.0.0	2013-Aug-30	<ul style="list-style-type: none"> <li>• New manual release status</li> </ul>

Table 2: Document history (sheet 5 of 5)

# Manual conventions

To give this manual an easily understood layout and to emphasize important information, the following typographical styles and symbols that are used.

## Typographic styles

Style (example)	Function
<b>Emphasis</b>	Programs, or highlighting important things.
Feature names	GigE features names are displayed as monospaced text.
<i>Feature options</i>	Features options and register's options that are selectable by the user are displayed as monospaced italicized text.
<b>UI Element</b>	Text that is displayed, or output, by the system for the user, like parts of the GUI, dialog boxes, buttons, menus, important information, windows titles.
<a href="#">Web Reference</a>	References to other documents or webpages, like web links, hypertext links, emails, but also cross references, that include a link the user can follow by clicking.

Table 3: Typographic styles

## Symbols and notes



### CAUTION

#### Risk of burns

Precautions are described



### CAUTION

#### Injury by falling cameras or lenses

Precautions are described



### CAUTION

#### Risk of cuts by sharp edges of lens mounts

Precautions are described



### NOTICE

#### Material damage

Precautions are described.


**NOTICE**
**Material damage by electrostatic discharge (ESD)**

Precautions as described.


**Avoiding malfunctions**

Precautions are described.


**Practical tip**

Additional information helps to understand or ease handling the camera.


**Additional information**

Web address or reference to an external source with more information is shown.

## Product naming

Names of third-party products in this document are shortened to ease reading. Nevertheless, we respect all manufacturer rights and trademarks.

Official product name	Naming in this document	Manufacturer website
Sony Semiconductor Solutions	Sony	<a href="http://www.sony-semicon.co.jp/">www.sony-semicon.co.jp/</a>
ON Semiconductor	ON Semi	<a href="http://www.onsemi.com/">www.onsemi.com/</a>
ams Sensors Belgium	CMOSIS/ams	<a href="http://www.cmosis.com/">www.cmosis.com/</a>
Teledyne e2v	Teledyne e2v	<a href="http://www.e2v.com/">www.e2v.com/</a>

*Table 4: Third-party product naming*

## Acronyms and terms

The following table provides a list of acronyms and terms used in this manual.

<b>Acronym or term</b>	<b>Description</b>
ADC	Analog to Digital Converter
AIA	Automated Imaging Association
CCD	Charge-coupled device
CMOS	Complementary metal-oxide semiconductor
EMI	Electromagnetic Interference
EMVA	European Machine Vision Association
ESD	Electrostatic discharge
FIFO	First-in first-out
GigE	Gigabit Ethernet
GND	Ground (power)
GVSP	GigE Vision Streaming Protocol
H × V	Horizontal × Vertical (sensor resolution measurement)
LUT	Look-up table
MSDS	Material Safety Data Sheet
NIC	Network interface card
NIR	Near-Infrared
PoE	Power over Ethernet
QE	Quantum efficiency
RoHS	Restriction of Hazardous Substances Directive
ROI	Region of interest
SDK	Software Development Kit
SFNC	Standard Feature Naming Convention
$t_{pdHL}$	Propagation delay high-to-low

*Table 5: Acronyms and terms used in this manual*


# Compliance, safety, and intended use



This chapter includes:

- Compliance notifications
- Information about intended use of the camera
- Copyright and trademark statement
- Your safety
- Product safety

## Compliance notifications



### For customers in the US



#### **Class B digital device**

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference does not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

We caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### Supplier Declaration of Conformity

Mako G cameras comply with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.



## Party issuing Supplier's Declaration of Conformity

Allied Vision Technologies GmbH  
Taschenweg 2a  
07646 Stadtroda, Germany  
T// +49 (36428) 677-106  
quality@alliedvision.com

## Responsible party - US contact information

Allied Vision Technologies, Inc.  
102 Pickering Way – Suite 502  
Exton, PA 19341, USA  
T// +1 978 225 2030

**Note:** changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## For customers in Canada

This apparatus complies with the Class B limits for radio noise emissions set out in the Radio Interference Regulations.

CAN ICES-3 (B) / NMB-3 (B)

## Pour utilisateurs au Canada

Cet appareil est conforme aux normes classe B pour bruits radioélectriques, spécifiées dans le Règlement sur le brouillage radioélectrique.

CAN ICES-3 (B) / NMB-3 (B)

## Avoid electromagnetic interferences

For all power and interface connections, only use shielded cables or cables recommended by Allied Vision.

## Intended use

Allied Vision's objective is the development, design, production, maintenance, servicing and distribution of digital cameras and components for image processing. We are offering standard products as well as customized solutions.

Intended use of Allied Vision product is the integration into Vision systems by professionals. All Allied Vision product is sold in a B2B setting.

Allied Vision isn't a legal manufacturer of medical product. Instead, Allied Vision cameras and accessories may be used as components for medical product after design-in by the medical device manufacturer and based on a quality assurance agreement (QAA) between Allied Vision (supplier) and medical device manufacturer (customer). Allied Vision's duties in that respect are defined by ISO 13485, clause 7.2 (customer-related processes, equivalent to ISO 9001, clause 8.2).

## Copyright and trademarks

All text, pictures, and graphics are protected by copyright and other laws protecting intellectual property. All content is subject to change without notice.

All trademarks, logos, and brands cited in this document are property and/or copyright material of their respective owners. Use of these trademarks, logos, and brands does not imply endorsement.

Copyright © 2020 Allied Vision GmbH. All rights reserved.

## Your safety

This section informs about issues related to your personal safety. Descriptions explain how to avoid hazards and operate Mako G cameras safely.

### Handling lens mounts

The lens mount thread has sharp edges. Be careful these edges do not cut your skin when mounting or unmounting lenses.

### Handling hot cameras

If you hold the camera in your hands during operation, your skin may get hurt. If you touch the camera when it is heated up, we recommend wearing protective gloves.

### Providing optimum heat dissipation

Operation outside the allowed temperature range can damage the camera. For best performance and to protect the camera from damage, keep the housing temperature in the specified operating temperature range.

Observe the following:

- To avoid camera crashes, operate the camera with a lens or lens adapter attached only.
- For maximum heat dissipation, affix the camera to a heat sink, using the mounting holes.
- Use mounting base and heat sink with large surface areas.
- Use a mounting base with a high thermal conductivity.
- Reduce ambient temperature. For example, in an outdoor application with direct sunlight, provide shading by an enclosure.
- Provide ventilation or other active cooling of camera, mounting base, and heat sink.

## Camera mounting

Mako G cameras must be mounted using the mounting threads. If vibration is higher than specified, cameras can disconnect from the mounting. Falling cameras can hurt you. To avoid personal injury:

- Mount the camera according to the instructions in the installation chapter.
- Ensure, shock and vibration do not exceed the specified range as specified in the specifications chapter.
- For heavy or long lenses, use a lens support and apply tests.

## Lens load

For non-static applications, use lenses with a mass less than 140 grams and a length less than 38 mm, where the center of gravity is 20 mm, measured from the lens mount front flange. For heavier or longer lenses, use a lens support and apply additional tests. For more information, please contact [support@alliedvision.com](mailto:support@alliedvision.com).

# Product safety

To prevent material damage, read the following to understand how to safely handle and operate the camera.

## Electrical connections

### ESD

ESD is dangerous for electronic devices, especially when tools or hands get in contact with connectors. We recommend measures to avoid damage by ESD:

- Unpacking: Remove the camera from its anti-static packaging only when your body is grounded.
- Workplace: Use a static-safe workplace with static-dissipative mat and air ionization.
- Wrist strap: Wear a static-dissipative wrist strap to ground your body.
- Clothing: Wear ESD-protective clothing. Keep components away from your body and clothing. Even if you are wearing a wrist strap, your body is grounded but your clothes are not.

### Cable connections

Provide sufficient strain relief for all cable connections to avoid short circuits and malfunctions.

### Camera power

Avoid damage to the camera from high output current or voltage. Connecting the camera to a device exceeding the allowed maximum current (20 mA per output) can damage the camera.

Providing Isolated Out Power > 30 Volts may damage the camera

Don't operate the camera beyond the environmental specifications. See environmental specifications limits in the Specifications section of this document. Special care must be taken to maintain an operating temperature as specified in the Specifications chapter.

Operating cameras beyond the specified range damages cameras. The camera is not intended to be connected to a DC distribution network.

## Optical components

Provide the following conditions to keep dirt and droplets out of the optical system of camera and lens:

- Dust-free environment
- Low relative humidity
- No condensation.

When camera or lens are stored:


- Cover the lens mount with a protection foil or cap.
- Cover front and back lens with caps.

## Sensor

Sensors are sensitive to excessive radiation: focused sunlight, lasers, and X-rays can damage the sensor. Dirt and scratches can damage the sensor as well.

Mako G cameras do not need additional cleaning. Cameras are cleaned before shipping. Incorrect cleaning can damage the sensor or the filter. Therefore, never clean the sensor or the filter.

Protect the camera filter and the sensor from dirt, because dirt becomes more visible the closer it gets to the sensor. In addition, keep the back lens clean. Hold the camera with the lens mount facing the ground to keep dirt out of the lens mount.

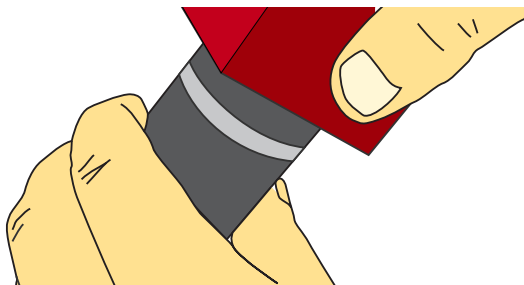

*Figure 1: Holding the camera with the lens mount facing the ground*

## Lenses

### Maximum protrusion

The sensor, filter, lens, or camera electronics can be damaged if a lens exceeding maximum protrusion is mounted to the camera. Use lenses with a maximum protrusion within camera specifications.

# Installing the camera



This chapter describes the components required for your vision system including configuring the host computer, NIC settings, and connecting your Mako G camera.

## Touching hot cameras



### CAUTION

#### Risk of burns

A camera in operation can reach temperature levels which could cause burns.

- Wear protective gloves when you touch a camera that is heated up.
- Ensure proper cooling of the camera.

## Electrostatic discharge



### NOTICE

ESD is dangerous for electronic devices, especially when tools or hands get in contact with connectors. We recommend measures to avoid damage by ESD:

- Unpacking: Remove the camera from its anti-static packaging only when your body is grounded.
- Workplace: Use a static-safe workplace with static-dissipative mat and air ionization.
- Wrist strap: Wear a static-dissipative wrist strap to ground your body.
- Clothing: Wear ESD-protective clothing. Keep components away from your body and clothing. Even if you are wearing a wrist strap, your body is grounded but your clothes are not.

## Mounting the camera



### CAUTION

#### Injury by falling cameras or lenses

A falling camera or lens can cause injury.

- Ensure proper mounting of cameras and lenses, especially for dynamic applications.
- Mount cameras as described in the instructions.
- Use a lens support for heavy lenses.



You can attach the camera to a base using the M3 and M2 mounting threads built into the top and bottom of the Mako G camera housing. Optionally, you can use the tripod adapter to mount your Mako G camera to a tripod.

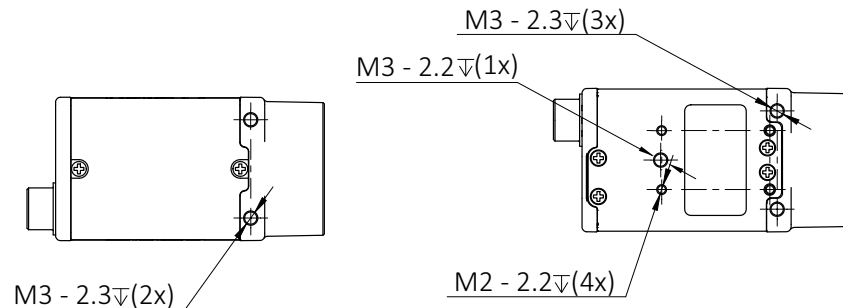


Figure 2: Mounting threads on top and bottom of housing



#### NOTICE

Avoid damage to the camera by using inappropriate accessories. The Mako U tripod adapter is not compatible with Mako G cameras.



#### NOTICE

Please observe the following when mounting the camera:

- It is important to consider the maximum intrusion depth of the M3 and M2 mounting holes (see Figure 1). Using longer screws can damage the threads or bottom plate and will reduce the strength of the joint.
- Use a spacer, spring lock washer, or internal tooth lock washer to reduce the intrusion depth of longer screws.
- Tighten screws at a maximum torque of 0.3 Nm to prevent damage of the threads.
- Apply low-strength thread-locking fluid to the screws to prevent loosening of the screws under vibrational loading.

## Mounting the lens



#### CAUTION

##### **Injury by falling cameras or lenses**

A falling camera or lens can cause injury.

- Ensure proper mounting of cameras and lenses, especially for dynamic applications.
- Mount cameras as described in the instructions.
- Use a lens support for heavy lenses.

**CAUTION****Risk of cuts by sharp edges of lens mounts**

The threads of the lens mount can have sharp edges.  
Be careful when mounting or unmounting lenses.

**NOTICE**

As monochrome and NIR models don't have an optical filter, always attach a dust cap when a lens is not attached to minimize the possibility of contaminants falling on the sensor surface.

**NOTICE**

Provide the following conditions to keep dirt and droplets out of the optical system of camera and lens:

- Dust-free environment
- Low relative humidity
- No condensation

To keep dirt out of the lens mount, hold the camera with the lens mount facing the ground. Keep filter and camera back lens clean, because dirt becomes more visible the closer it gets to the sensor.

**NOTICE**

Image sensors are sensitive to excessive radiation: focused sunlight, lasers, and X-rays can damage the sensor.

**NOTICE**

Some cleaning agents can damage this product. Avoid cleaning the image sensor unless absolutely necessary. See the instructions on optics cleaning in this document.

We can clean your camera as a service for you, if necessary. For more information, contact Allied Vision support.

Mako G cameras offer various lens mounts for installing a lens including C-Mount, CS-Mount, and M12-Mount (S-Mount). Lenses can be purchased directly from Allied Vision or from an Allied Vision distribution partner. Users need to select the desired focal length of the lens and appropriate optical format for the target camera model.

For more information on lens mount options for your Mako G camera, see the Modular Concept. For information on available lenses and accessories for your camera, see the Accessories webpage.

## Lens load

For non-static applications, use lenses with a mass less than 140 grams and a length less than 38 mm, where the center of gravity is 20 mm, measured from the lens mount front flange. For heavier or longer lenses, use a lens support and apply additional tests. For more information, please contact [support@alliedvision.com](mailto:support@alliedvision.com).

## Configuring the host computer

Mako G cameras can operate on 10/100 or Gigabit speed NICs. In order to reach the maximum camera frame rate, a Gigabit speed network NIC with jumbo packet support is required.

If your host computer has an available Ethernet port, this can be used with Mako G cameras. We recommend that your camera system uses a dedicated Ethernet port not shared with Internet or local area networks. If more ports are needed, or your existing NIC is unable to operate at Gigabit Ethernet speeds, installing additional hardware may be required.

Usage on mixed-use networks (with printers, Internet and email) is possible but may impact camera performance (for example, frame rate). Check with your network administrator if required for network configuration.

## Installing the NIC driver

Install the NIC driver from your network card manufacturer if available. If no installation application is provided, update the driver manually.

### To update the driver manually

1. Click the **Start** icon and select **Control Panel** in the menu.
2. Click **View by Large icons** and select **Device Manager** in the list. A new window opens.
3. Under **Network Adapters**, locate the Ethernet network adapter, right-click the entry, and select **Update Driver Software** in the menu.
4. Select the **Search automatically for updated driver software or Browse my computer for driver software**.
5. Click **Close** after the driver has been installed.

## Optional: Modifying the NIC IP address

After the initial NIC hardware installation, connect the NIC directly to the camera. The default configuration assigns an IP address automatically using the Link-Local Address range of 169.254.xxx.xxx or an address defined by the DHCP server, if present.

Users can fix the NIC address to minimize the time required for a camera to be recognized by the host application.

To connect to the camera, edit the host computer's adapter settings and configure the following settings:

- IP Address: 169.254.100.1
- Subnet mask: 255.255.0.0
- Default gateway: blank

When systems employ multiple NICs connected to multiple cameras the address of the NICs should be set. Each NIC or NIC card port requires a unique IP address.

For example:

NIC 1:

- IP Address: 169.254.100.1
- Subnet mask: 255.255.0.0
- Default gateway: blank

NIC 2:

- IP Address: 169.254.100.2
- Subnet mask: 255.255.0.0
- Default gateway: blank

## Optimize system performance

The NIC should be adjusted to improve system performance when using a Mako G camera. This performance is related to minimizing CPU usage and dropped or resent packets.

Edit the NIC driver properties according to the values in the following table. The names and availability of the properties listed may vary depending on NIC manufacturer and model.

Property	Value
Packet size or maximum transmission unit	8228 bytes or larger
Interrupt moderation	Enable
Interrupt moderation rate	Extreme
Receive buffers	Maximum value configurable
Transmit buffers	256 bytes

*Table 6: NIC settings*

## Default packet size

The default packet size of Mako G cameras is 8228 bytes. The host NIC needs to support a packet size of equal or larger size to stream from the camera.

## NIC settings

The NIC settings may also vary depending on your system configuration and the NIC manufacturer.

For desktop systems, use a PCI Express bus NIC. For laptops, use an expansion slot via an ExpressCard®.

A list of recommended NICs is available on the Allied Vision website. See the Hardware Selection for Allied Vision GigE Cameras application note.

## Enabling jumbo packets

The properties listed for the NIC may include either **Jumbo Packet** or **Jumbo Frames** depending on the manufacturer. If neither is listed under properties, your NIC may not support this feature. You must use a NIC that supports Jumbo Frames or Jumbo Packets.

### To enable jumbo packets

1. Click the **Start** icon and select **Control Panel** in the menu.
2. Click **View by Large icons** and select **Device Manager** in the list.
3. Under **Network Adapters**, locate the Ethernet network card, right-click the entry, and select **Properties** in the menu.
4. Select the **Advanced** tab.
5. Select the property **Jumbo Packet** and set the value to *9014 Bytes*.
6. Click **OK** to save the setting.

## Connecting your camera

Use a Category 6 or higher rated Ethernet cable to connect the Mako G camera to the NIC. Crossover cabling is not required but does work. The camera has circuitry to determine if a crossover cable is being used.



We recommend Category 6 (CAT6) or higher rated Ethernet cables for Mako G cameras. A different rating may not sustain peak interface bandwidth; leading to lost connectivity or dropped frames coming from the camera.

## Powering up the camera

A camera power adapter for Mako G cameras is available from Allied Vision. See the Specifications chapter for connector definition and voltage specifications.



A 12 V power adapter with Hirose connector is available for purchase from Allied Vision:

- Order code: 13868 (Desktop power supply without connection cable)
- Order code: 13866 (AC power cable, 1.8 m, US to C13)
- Order code: 13865 (AC power cable, 1.8 m, EU to C13)



### NOTICE

- Use only DC power supplies with insulated cases.
- For all power connections, use only shielded cables to avoid electromagnetic interference.
- Mako G cameras can source power from:
  - IEEE 802.3af (100 Mbps and 1000 Mbps), and
  - IEEE 802.3at Type 1 compliant PoE power sourcing equipment devices such as switches, injectors, or NIC.



### NOTICE

Don't operate the camera beyond the environmental specifications. See the environmental specifications limits in the Specifications section of this document. Special care must be taken to maintain operating temperature as specified in the Specifications chapter.



### NOTICE

Avoid damage to the camera from high output current or voltage:

- Connecting the camera to a device exceeding the allowed maximum current (20 mA per output) can damage the camera.
- Providing Isolated Out Power > 30 Volts may damage the camera.



### NOTICE

Verify all external connections in terms of voltage levels, power requirements, voltage polarity, and signal integrity prior to powering the device.

**NOTICE**

Operation outside the allowed temperature range can damage the camera. For best performance and to protect the camera from damage, keep the housing temperature in the specified operating temperature range. Housing temperature of the camera increases during power-up and initial operation. This temperature later stabilizes.

Observe the following:

- For maximum heat dissipation, affix the camera to a heat sink, using the mounting threads.
  - Use mounting base and heat sink with large surface areas.
  - Use a mounting base with a high thermal conductivity.
- Reduce ambient temperature. For example, in an outdoor application with direct sunlight, provide shading by an enclosure.
- Provide ventilation or other active cooling of camera, mounting base, and heat sink.



The camera is not intended to be connected to a DC distribution network. The maximum length for I/O cables must not exceed 30 meters.

## Powering the camera via Hirose I/O port

Cameras powered by both the Hirose I/O port and the Gigabit Ethernet port use the power provided by Hirose I/O port only.

## Powering the camera via PoE

Please note the following when using PoE accessories with Allied Vision PoE-capable GigE cameras:

- Mako G cameras conform to the IEEE 802.3at Type 1 standard for GigE.
- Ensure that your Power Sourcing Equipment (PSE) provides data over all four pairs.
- If the PSE uses only two out of four pairs for data, operation is limited to 10/100 Mbps. This translates to lower frame rates.
- If the PSE uses all four pairs for data, operation is in Gigabit (1000 Mbps) mode. Thus, allowing you to achieve the maximum possible frame rate.

# Connecting to host application

After you have installed the **Vimba Viewer** or third-party application to your host computer, connect your Mako G camera via an Ethernet cable. If your camera is not PoE powered, connect the Hirose cable to power the camera.

## Allied Vision software

All software packages provided by Allied Vision are free of charge and contain the following components:

- Drivers
- SDK for camera control and image acquisition
- Examples based on the provided APIs of the SDK
- Documentation and release notes
- Viewer application to operate and configure the cameras

Vimba is Allied Vision's GenICam-based SDK with transport layers for all Allied Vision cameras with GigE Vision, USB3 Vision, IEEE 1394, and Camera Link interface. Vimba runs on Windows, Linux, and Linux for ARM. You can port your source code from Windows to Linux or cross-compile from a Linux PC to an embedded system.

Vimba provides APIs for C, C++, and .NET. Users who quickly want to develop a straightforward application love the simplicity of the C API or the .NET API.

Advanced users with high demands appreciate the C++ API, which is designed as a highly efficient and sophisticated API for advanced object-oriented programming including the STL (standard template library), shared pointers, and interface classes.

Vimba includes programming examples in C, C++, and C# and an extensive user documentation.



Vimba Viewer documentation is included with the software download. After Vimba Viewer is installed on your host computer, documentation is located under `\Program Files\Allied Vision\Vimba`.

## Third-party software

In addition to the software provided by Allied Vision, there are numerous GigE Vision standard compliant third-party software options available. In general, third-party software provides increased functionality such as image processing and video recording.

GenICam-based third-party software automatically connects with Vimba's transport layers. Additionally, Vimba includes the Cognex Adapter for VisionPro.



## Configuring your camera

After the host PC is configured, it is necessary to configure the parameters in the camera to establish the connection with best performance. It is necessary to note the value for the feature **GevSCSPacketSize** which defines the size of the network packets and also the size of the feature **StreamBytesPerSecond** which controls the available bandwidth of the network interface.

If just one camera is connected, the maximum value can be used and therefore set to 124,000,000. When using multiple cameras simultaneously on one network adapter through a switch, we recommend to divide the available amount of **StreamBytesPerSecond** by the number of connected cameras. When two cameras with the same parameter share the available bandwidth, the usable maximum value for each camera is 62,000,000.

## Accessories

We offer a wide range of accessories for use with Mako G cameras including:

- Gigabit Ethernet accessories, such as standard GigE components or PoE capable GigE components.
- Lenses for corresponding sensor sizes and resolutions.

For information on available lenses for your camera, see the Accessories webpage.



A list of recommended GigE components is available on the Allied Vision website. See the Hardware Selection for Allied Vision GigE Cameras application note at [www.alliedvision.com/en/support/technical-papers-knowledge-base](http://www.alliedvision.com/en/support/technical-papers-knowledge-base).

# Specifications



This chapter provides:

- Applied standards
- Technical specifications
- Absolute QE plots
- Spectral response plots
- ROI frame rate plots
- Comparison of feature availability in Mako G camera models
- Mechanical drawing and dimensions of standard housing model and tripod adapter
- Sensor position accuracy
- Maximum protrusion distance and filter diameter for C-Mount and CS-Mount

## Applied standards

### GigE Vision®

The GigE Vision standard is an interface standard for digital machine vision cameras administered by the AIA that is widely supported in the machine vision industry. In contrast, Gigabit Ethernet is the network GigE Vision is built upon.

### GenICam™

GenICam is a machine vision standard hosted by the EMVA. The aim of GenICam is to provide a generic configuration interface for cameras and devices independent of the used interface technology (for example, GigE Vision, USB3 Vision, DCAM IEEE 1394, Camera Link). This approach enables proper interoperability between GenICam compliant hardware and software solutions without the need for customization.

The GenICam standard consists of multiple modules that specify tasks to be solved. Allied Vision cameras and software make use of these modules, like the SFNC that standardizes feature names and types via an XML file or the transport layer interface (GenTL) that is used to grab images.

### IP class

Equipped with a lens as intended, Mako G cameras comply with IP30 class according to IEC 60529.

## Shock and vibration

Mako G cameras were successfully tested according to the following standards:

- DIN ISO 9022-3-37-01-1, Random vibration testing
- DIN ISO 9022-3-30-03-1, Shock testing
- DIN ISO 9022-3-31-01-1, Bump testing

# Notes on specifications

## Dimensions and mass

The dimensions listed in the following tables are for Mako G standard housing models. Dimensions include the default lens mount and connectors but not the tripod and lens.

The mass listed in the following table are for Mako G models only and does not include the tripod and lens.

## Frame memory

Normally, an image is captured and transported in consecutive steps. The image is taken, read out from the sensor, digitized and sent over the GigE network. Mako G cameras are equipped with an image buffer. Specifications tables for each camera show how many frames can be stored by each model.

The memory operates according to the FIFO principle. This makes addressing for individual images unnecessary.

## Number of frames

The number of frames (`StreamHoldCapacity`) depends on resolution, pixel format, and packet size. Stated number of frames is typical for full resolution, *Mono8* or *BayerRG8*, and `GevSCPSPacketSize = 8192`.

## Resolution and ROI frame rate

ROI frame rate is listed after the specification table. The resulting frame rate from changing sensor height from full image to a single line. Unless otherwise noted, sensors do not give an increase in readout speed with a reduction in width.

Unless otherwise stated, frame rate, exposure time control, trigger latency, and trigger jitter values are for 8-bit and 12-bit pixel formats only; that is, *Mono8*, *Bayer8*, *Mono12Packed*, *Bayer12Packed*, and *YUV411Packed*.

## Resolution and ROI measurements

- Data was generated using `StreamBytesPerSecond = 124` Mbps (full bandwidth) and an 8-bit pixel format. Frame rates may be lower if using network hardware incapable of 124 Mbps.

- ROIs are taken as center image for maximum speed advantage, where feature  $\text{OffsetY} = (\text{full sensor height} - \text{ROI height})/2$ .
- **BinningVertical** is horizontal row summing on sensor before readout. The frame rate for an ROI at the same effective height as binning is slower because the sensor still needs to read out the “fast readout rows” in ROI mode.

## Frame rate and readout

Although the sensor is capable of higher frame rates, readout is limited by GigE bandwidth and exposure value. You can improve frame rates with a reduced ROI and shorter exposure values.

## Absolute QE plots

### Before reading the QE plots

- All measurements were done without optical filters. With optical filters, QE decreases by approximately 10 percent.
- QE measurements for the Mako G-508B POL (IMX250MRZ) were measured with unpolarized light.
- The uncertainty in measurement of the QE values is  $\pm 10$  percent. This is mainly due to uncertainties in the measuring apparatus itself (Ulbricht sphere, optometer).
- Manufacturing tolerance of the sensor increases overall uncertainty.

### Sony CCD and CMOS sensors

Sony provides relative response curves in their sensor data sheets. To create the absolute QE plots shown in this chapter, the relative response was converted to a normalized QE response and then adjusted as per three measured QE values (at 448 nm, 529 nm, 632 nm) for color sensors and one measured QE value (at 529 nm) for monochrome sensors.

### ON Semi, CMOSIS/ams, and Teledyne e2v CMOS sensors

The curve in the absolute QE plots shown in this chapter is taken from the sensor manufacturer data sheet.

The information was correct at the time of publishing.

## Wavelength

The wavelength range in the absolute QE plots reflects the information available in the sensor manufacturer data sheet at the time of publishing. Many color sensors are documented by the sensor manufacturer only for wavelengths from 400 nm to 700 nm.

## Spectral response plots

The curves in the spectral response plots shown in this chapter were calculated from measured quantum efficiencies at 448 nm, 529 nm, and 632 nm. The shape of the curve is taken from the sensor data sheet but the values have been adjusted based on these measured values.

The uncertainty in measurement of the spectral response values is  $\pm 10$  percent.

## Specifications common to all models

The following table provides specifications common to all Mako G models.

Feature	Specification
Default lens mount	C-Mount
Optional lens mount	<ul style="list-style-type: none"> <li>CS-Mount</li> <li>M12-Mount (S-Mount) adapter</li> </ul>
Default optical filter	<ul style="list-style-type: none"> <li>Monochrome and NIR models: No filter<sup>1</sup></li> <li>Color models: Type Hoya C-5000 IR cut filter (22 mm)</li> </ul>
Optional optical filters	<ul style="list-style-type: none"> <li>B 270 ASG protection glass</li> <li>Type Hoya C-5000 IR cut filter</li> <li>Type Jenofilt 217 IR cut filter</li> <li>Type RG715 IR pass filter</li> <li>Type RG830 IR pass filter</li> </ul>
Opto-isolated I/O	1 input, 3 outputs
Operating temperature	+5 °C to +45 °C housing temperature
Storage temperature	-10°C to +70 °C ambient temperature (without condensation)
Operating humidity	20 to 80% non-condensing
Power requirements	12 to 24 VDC AUX or IEEE 802.3at Type 1 PoE
Camera dimensions (L × W × H)	60.5 × 29.2 × 29.2 mm
Mass (typical)	80 g
Interface standard	<ul style="list-style-type: none"> <li>IEEE 802.3 1000BASE-T (Gigabit Ethernet) and IEEE 802.3at Type 1 (PoE)</li> <li>GigE Vision Standard V1.2</li> </ul>
Camera control standard	GenICam SFNC V1.2.1
Temperature monitoring	Available for main board only. Resolution: 0.031; Accuracy: ±1 °C

<sup>1</sup> As monochrome and NIR models do not have an optical filter, always attach a dust cap when a lens is not attached to minimize the possibility of contaminants falling on the sensor surface.

*Table 7: Specifications common to all Mako G models*

# Mako G-030 series

The following table provides model series specifications. The values are valid for Mako G-030B and G-030C models. For specifications common to all models, see [Specifications common to all models](#).



## Discontinuation

Due to ams's discontinuation of the CMV300 sensor, the Mako G-030 series has been discontinued with the last time buy period ending on August 18, 2020. For more information, see the Product change notice webpage at [www.alliedvision.com/en/support/product-change-notifications](http://www.alliedvision.com/en/support/product-change-notifications).

Feature	Specification	
	Mako G-030B	Mako G-030C
Sensor model	CMOSIS/ams CMV300-3E7M1WP	CMOSIS/ams CMV300-3E7C1WP
Resolution (H × V)	644 × 484; 0.3 MP	
Sensor type	CMOS	
Shutter type	Global shutter	
Sensor format	Type 1/3	
Sensor size	5.9 mm diagonal	
Pixel size	7.4 μm × 7.4 μm	
Maximum frame rate at full resolution	309 fps	
Maximum image bit depth	12-bit	
Image buffer	64 MB	
StreamHoldCapacity	Up to 99 frames at full resolution	
Monochrome pixel formats	Mono8, Mono12Packed, Mono12	Mono8
YUV color pixel formats	Not applicable	YUV411Packed, YUV422Packed, YUV444Packed
RGB color pixel formats	Not applicable	RGB8Packed, BGR8Packed
RAW pixel formats	Not applicable	BayerRG8, BayerRG12Packed, BayerRG12
Exposure time control	83 μs to 2 s; 1 μs increments	
Gain control	0 to 26 dB; 1 dB increments	
Decimation	Horizontal and Vertical: 1, 2, 4 factor	
Power consumption	2.1 W at 12 VDC; 2.3 W PoE	

Table 8: Mako G-030 model series specifications (sheet 1 of 2)



Feature	Specification	
	Mako G-030B	Mako G-030C
Trigger latency <sup>1</sup>	Idle state: 3.1 $\mu$ s; Frame valid state: 3.1 $\mu$ s	
Trigger jitter <sup>1</sup>	Idle state: $\pm$ 1.2 $\mu$ s; Frame valid state: $\pm$ 3.1 $\mu$ s	
Time between exposures	Pixel format	Value
	Mono8, Mono12Packed, BayerRG8, BayerRG12Packed, YUV411Packed	96 $\mu$ s
<sup>1</sup> These values are calculated directly from the microcontroller source. These values are only valid for pixel formats < 16 bits per pixel and applicable in both Idle and Frame valid states: <ul style="list-style-type: none"> <li>• Idle state: sensor is ready and camera is idle, waiting for the next trigger.</li> <li>• Frame valid state: sensor is reading out and camera is busy. If next frame is requested by an external trigger in this state, higher latency may occur as compared to the Idle state.</li> </ul>		

*Table 8: Mako G-030 model series specifications (sheet 2 of 2)*

## Absolute QE

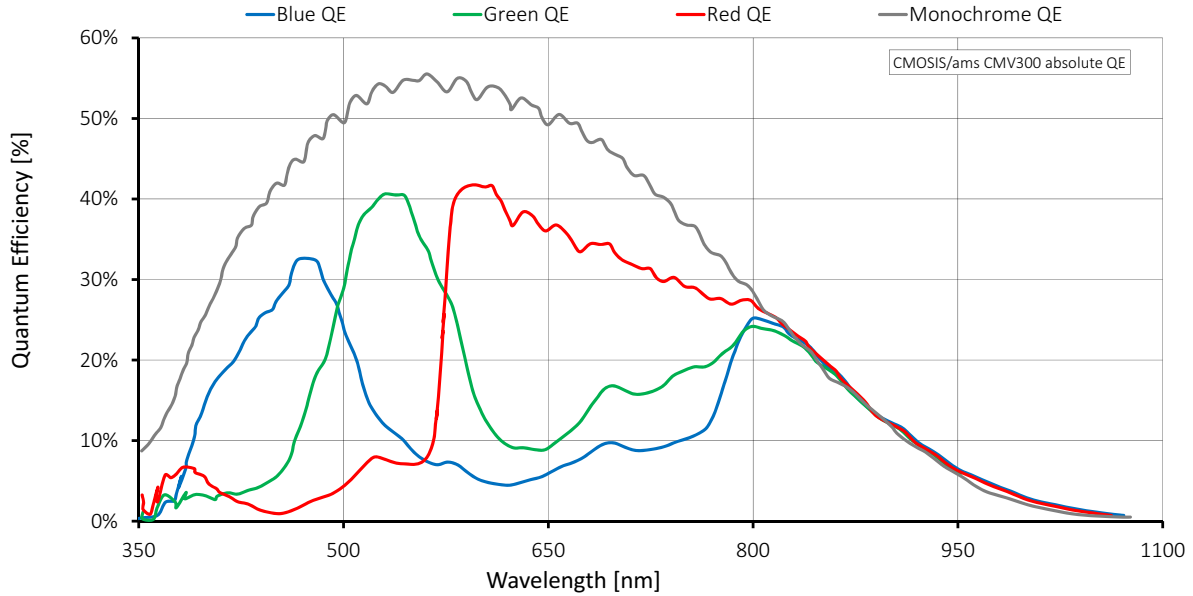


Figure 3: Mako G-030 (CMOSIS/ams CMV300) absolute QE

## Spectral response

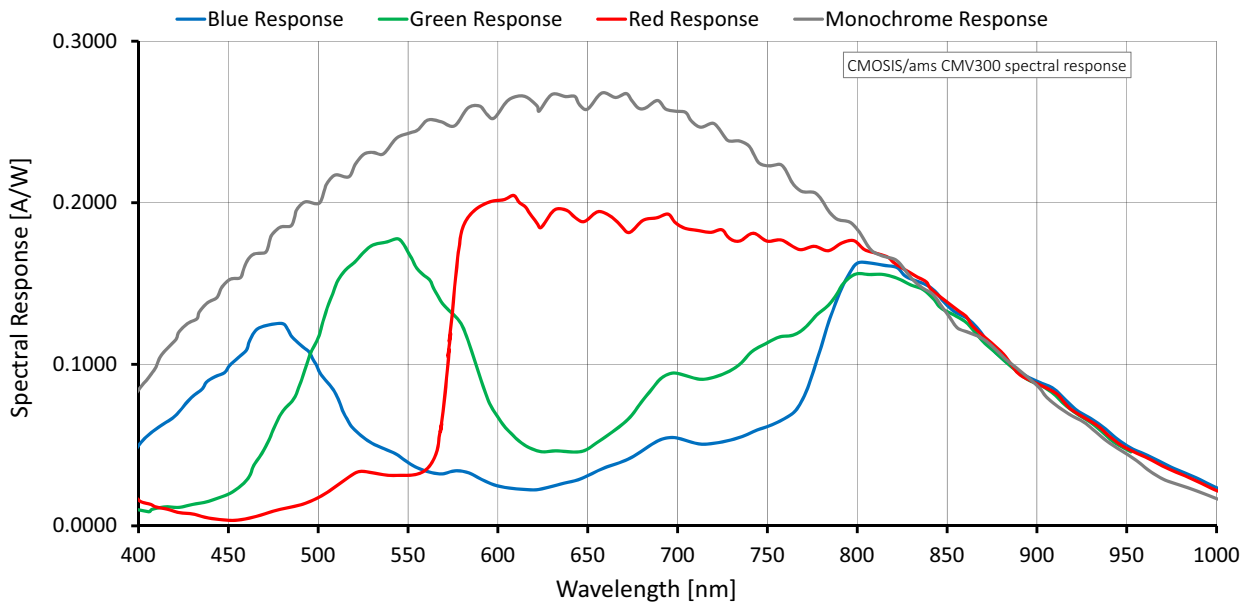


Figure 4: Mako G-030 (CMOSIS/ams CMV300) spectral response

## ROI frame rate

$$\text{Max. frame rate} = \frac{1}{204 \mu\text{s} + 6.25 \mu\text{s} \times \text{ROI height}}$$

Maximum frame rate at full resolution according to formula: 309 fps

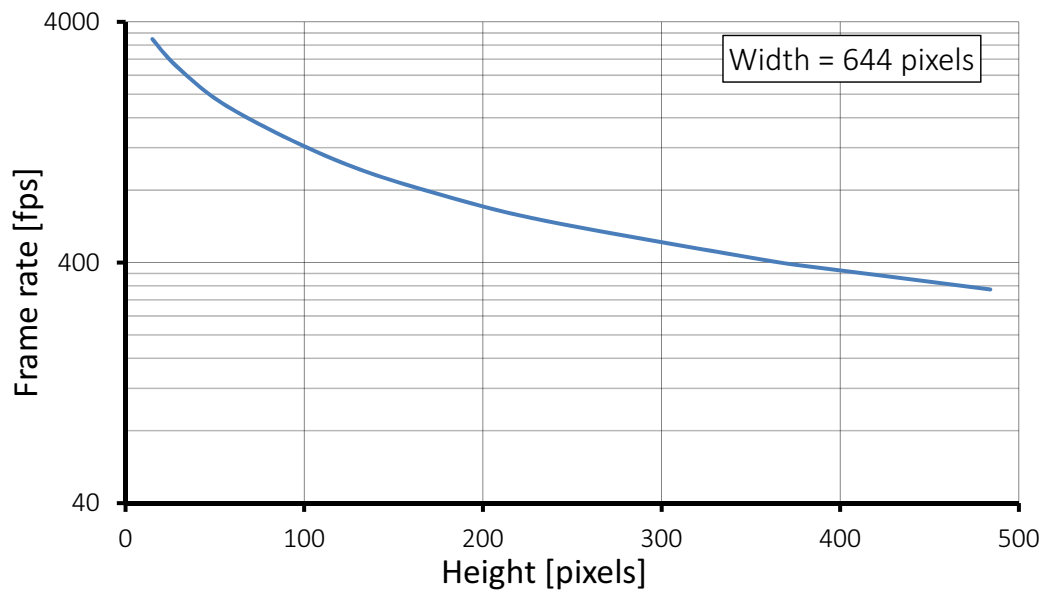


Figure 5: Mako G-030 frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
484	309.0	180	752.0
480	312.0	120	1048.0
384	384.0	60	1727.0
360	407.0	30	2554.0
240	586.0	15	3393.0

Table 9: Frame rate as a function of ROI height (Width=644 pixels)



There is an increase in frame rate with reduced width if the camera is bandwidth limited.

## Mako G-032 series

The following table provides model series specifications. The values are valid for Mako G-032B and G-032C models. For specifications common to all models, see [Specifications common to all models](#).

Feature	Specification	
	Mako G-032B	Mako G-032C
Sensor model	Sony ICX424AL	Sony ICX424AQ
Resolution (H × V)	658 × 492; 0.3 MP	
Sensor type	Interline CCD, Progressive Scan	
Shutter type	Global shutter	
Sensor format	Type 1/3	
Sensor size	6.0 mm diagonal	
Pixel size	7.4 μm × 7.4 μm	
Maximum frame rate at full resolution	102.3 fps	
Maximum image bit depth	12-bit	
Image buffer	64 MB	
StreamHoldCapacity	Up to 202 frames at full resolution	
Monochrome pixel formats	Mono8, Mono12Packed, Mono12	Mono8
YUV color pixel formats	Not applicable	YUV411Packed, YUV422Packed, YUV444Packed
RGB color pixel formats	Not applicable	RGB8Packed, BGR8Packed
RAW pixel formats	Not applicable	BayerRG8, BayerRG12, BayerRG12Packed
Exposure time control	10 μs to 93 s; 1 μs increments	
Gain control	0 to 30 dB; 1 dB increments	
Binning	Horizontal: 1 to 8 columns Vertical: 1 to 14 rows	
Power consumption	2.4 W at 12 VDC; 2.8 W PoE	
Trigger latency <sup>1</sup>	Idle state: 7.2 μs; Frame valid state: 16.9 μs	
Trigger jitter <sup>1</sup>	Idle state: ±4.0 μs; Frame valid state: ±13.7 μs	

Table 10: Mako G-032 model series specifications (sheet 1 of 2)

Feature	Specification	
	Mako G-032B	Mako G-032C
Time between exposures	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8, BayerRG12Packed, YUV411Packed	74 $\mu$ s
<sup>1</sup> It is possible to start the exposure of the next frame while the previous frame is read out: <ul style="list-style-type: none"> <li>• Idle state: sensor is ready and camera is idle, waiting for the next trigger.</li> <li>• Frame valid state: sensor is reading out and camera is busy. If next frame is requested by an external trigger in this state, higher latency may occur as compared to the Idle state.</li> </ul>		

*Table 10: Mako G-032 model series specifications (sheet 2 of 2)*

## Absolute QE

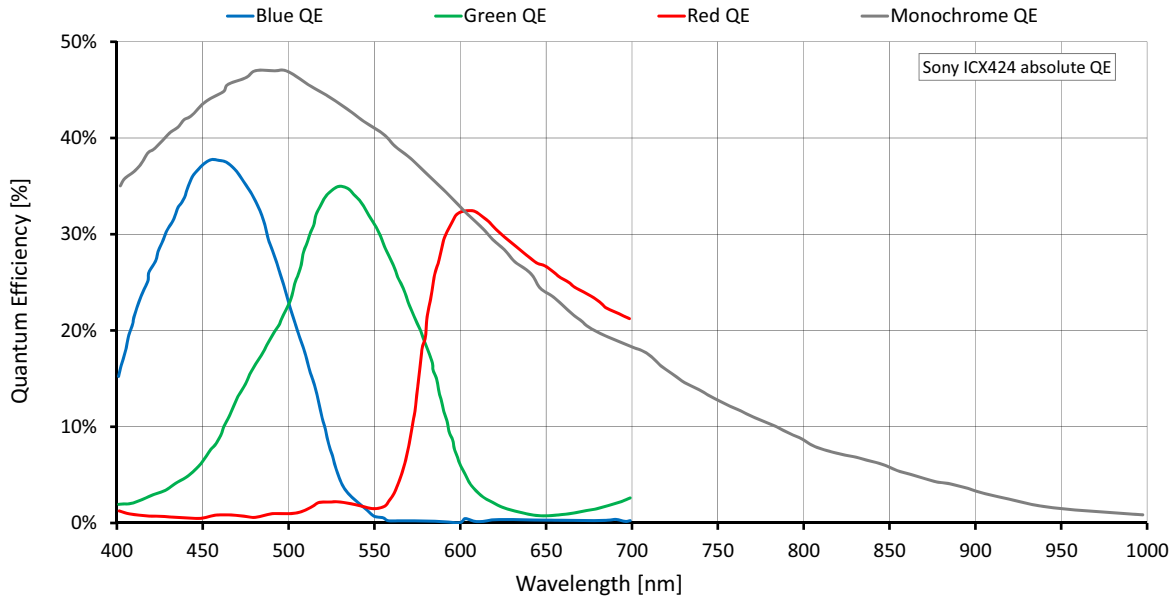


Figure 6: Mako G-032 (Sony ICX424) absolute QE

## Spectral response

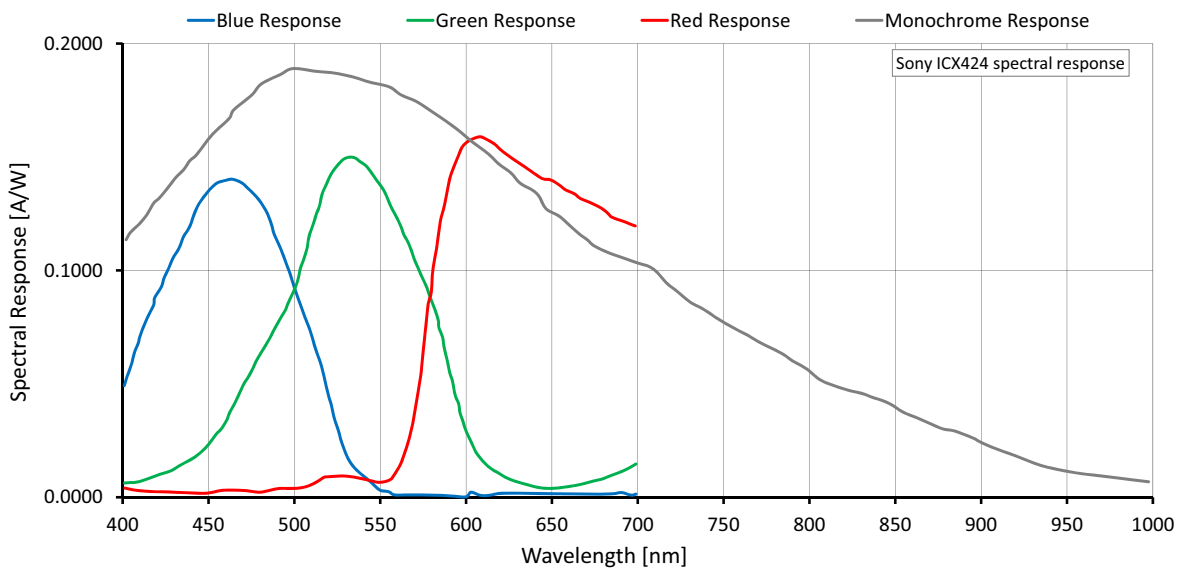


Figure 7: Mako G-032 (Sony ICX424) spectral response

## ROI frame rate

$$\text{Max. frame rate} = \frac{1}{19.46 \mu\text{s} \times \text{ROI height} + 2.29 \mu\text{s} \times (492 - \text{ROI height}) + 195.81 \mu\text{s}}$$

Maximum frame rate at full resolution according to formula: 102.3 fps

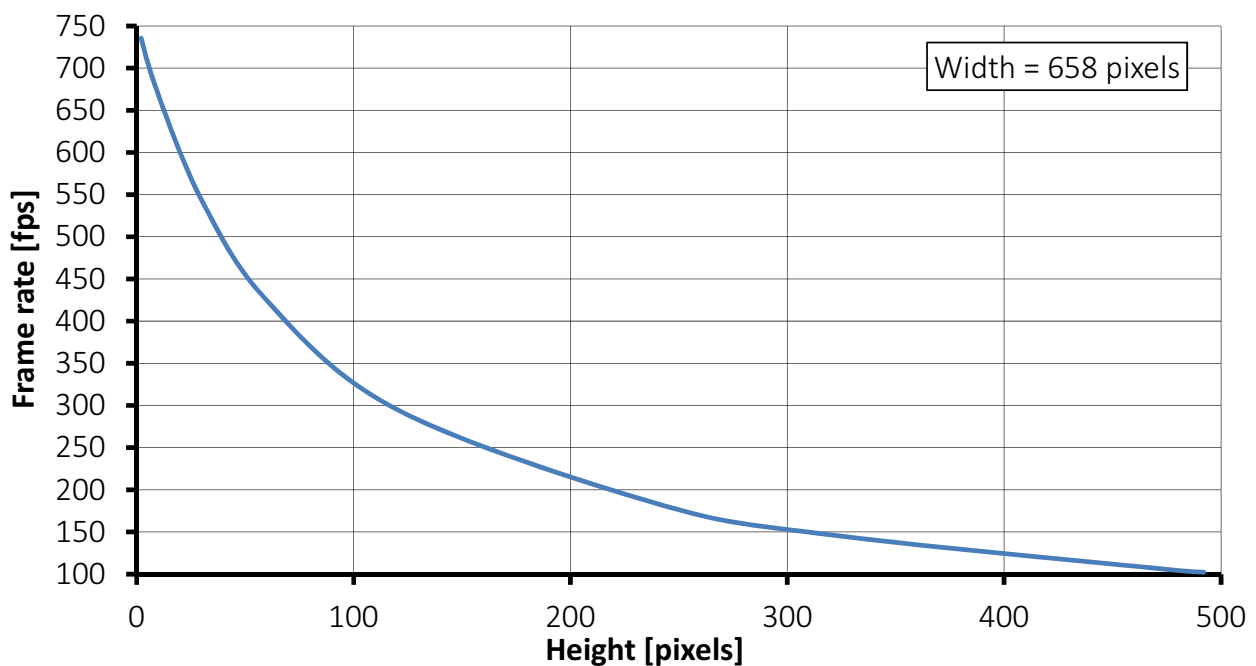


Figure 8: Mako G-032 frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
492	102.3	60	424.5
480	104.5	30	543.3
320	146.6	10	667.9
240	183.5	2	735.4
120	295.3		

Table 11: Frame rate as a function of ROI height (Width=658 pixels)



Frame rate = theoretical maximum frame rate (in fps) of the CCD sensor according to given formula.

## Mako G-040 series

The following table provides model series specifications. The values are valid for Mako G-040B and G-040C models. For specifications common to all models, see [Specifications common to all models](#).

Feature	Specification	
	Mako G-040B	Mako G-040C
Sensor model	Sony IMX287LLR Exmor	Sony IMX287LQR Exmor
Resolution (H × V)	728 × 544; 0.4 MP	
Sensor type	CMOS	
Shutter type	Pregius® global shutter	
Sensor format	Type 1/2.9	
Sensor size	6.3 mm diagonal	
Pixel size	6.9 μm × 6.9 μm	
Chief ray angle <sup>1</sup>	0.0 degrees	
Maximum frame rate at full resolution	286 fps (295.7 fps burst mode)	
Maximum image bit depth	12-bit	
Image buffer	64 MB	
StreamHoldCapacity	Up to 165 frames at full resolution	
Monochrome pixel formats	Mono8, Mono12Packed, Mono12	Mono8
YUV color pixel formats	Not applicable	YUV411Packed, YUV422Packed, YUV444Packed
RGB color pixel formats	Not applicable	RGB8Packed, BGR8Packed
RAW pixel formats	Not applicable	BayerRG8, BayerRG12, BayerRG12Packed
Exposure time control <sup>2</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	19 μs to 85.9 s; 5.76 μs increments
	Mono12, BayerRG12, YUV422Packed	21 μs to 85.9 s; 7.68 μs increments
	RGB8Packed, BGR8Packed, YUV444Packed	25 μs to 85.9 s; 11.52 μs increments
Gain control	0 to 40 dB; 0.1 dB increments	
Binning	Horizontal: 1 to 4 pixels; Vertical: 1 to 4 rows	

Table 12: Mako G-040 model series specifications (sheet 1 of 2)



Feature	Specification	
	Mako G-040B	Mako G-040C
Decimation	Horizontal and Vertical: 1, 2, 4, 8 factor	
Power consumption	2.43 W at 12 VDC; 2.69 W PoE	
Trigger latency <sup>3</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	17.28 $\mu$ s
	Mono12, BayerRG12, YUV422Packed	23.04 $\mu$ s
	RGB8Packed, BGR8Packed, YUV444Packed	34.56 $\mu$ s
Trigger jitter <sup>3</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	$\pm$ 2.88 $\mu$ s
	Mono12, BayerRG12, YUV422Packed	$\pm$ 3.84 $\mu$ s
	RGB8Packed, BGR8Packed, YUV444Packed	$\pm$ 5.76 $\mu$ s
Time between exposures	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	101 $\mu$ s
	Mono12, BayerRG12, YUV422Packed	140 $\mu$ s
	RGB8Packed, BGR8Packed, YUV444Packed	217 $\mu$ s

<sup>1</sup> For more information on chief ray angle, contact Allied Vision support.

<sup>2</sup> Whenever pixel format is changed, exposure adjusts itself to the nearest multiple of the exposure increment.

<sup>3</sup> These values are calculated directly from the microcontroller source. There is no differentiation between Idle and Frame valid states for this sensor.

Table 12: Mako G-040 model series specifications (sheet 2 of 2)

## Absolute QE

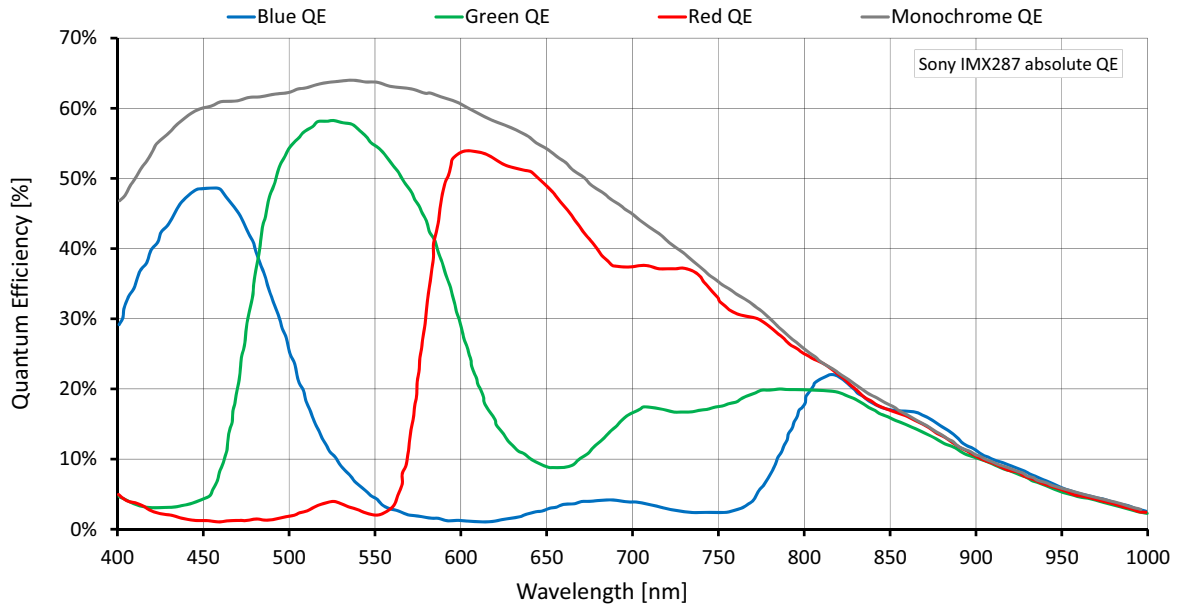


Figure 9: Mako G-040 (Sony IMX287) absolute QE

## Spectral response

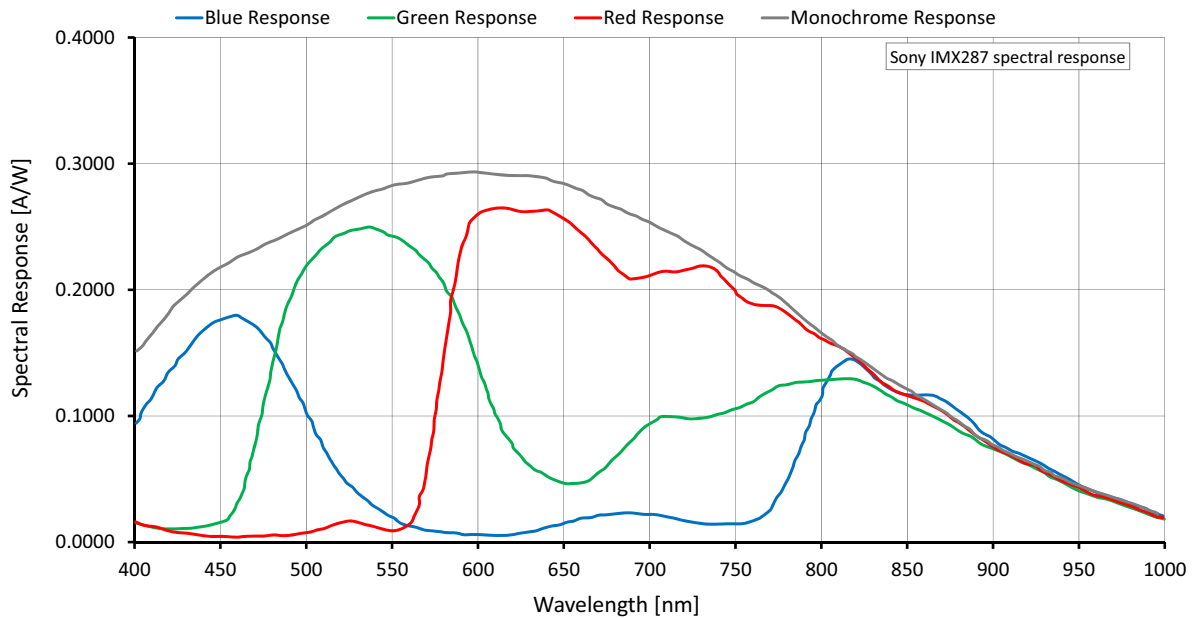


Figure 10: Mako G-040 (Sony IMX287) spectral response

## ROI frame rate

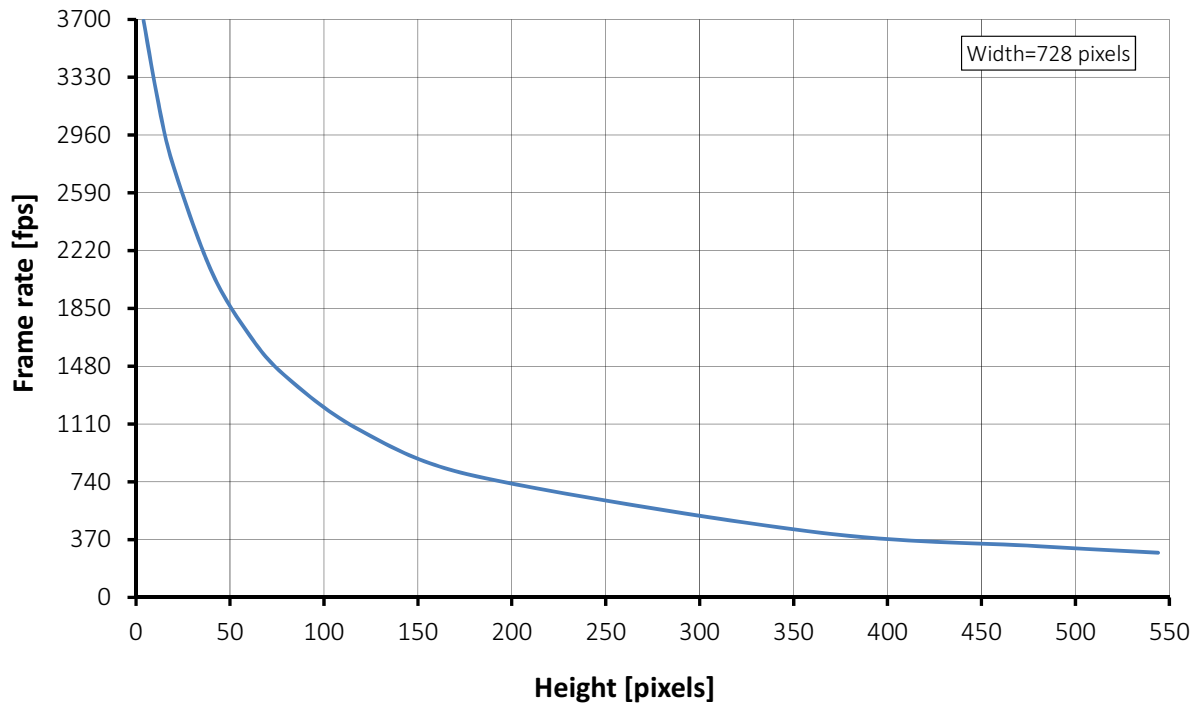


Figure 11: Mako G-040 frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
544	286.0	60	1685.5
480	328.2	40	2091.6
360	420.4	20	2755.6
180	778.5	12	3156.5
120	1065.0	4	3692.7
80	1411.4		

Table 13: Frame rate as a function of ROI height (Width=728 pixels)



There is an increase in frame rate with reduced width if the camera is bandwidth limited. Reducing the exposure time may result in higher frame rates.

## Mako G-125 series

The following table provides model series specifications. The values are valid for Mako G-125B and G-125C models. For specifications common to all models, see [Specifications common to all models](#).

Feature	Specification	
	Mako G-125B	Mako G-125C
Sensor model	Sony ICX445ALA	Sony ICX445AQA
Resolution (H × V)	1292 × 964; 1.2 MP	
Sensor type	Interline CCD, Progressive Scan	
Shutter type	Global shutter	
Sensor format	Type 1/3	
Sensor size	6.0 mm diagonal	
Pixel size	3.75 μm × 3.75 μm	
Maximum frame rate at full resolution	30.3 fps	
Maximum image bit depth	12-bit	
Image buffer	64 MB	
StreamHoldCapacity	Up to 52 frames at full resolution	
Monochrome pixel formats	Mono8, Mono12Packed, Mono12	Mono8
YUV color pixel formats	Not applicable	YUV411Packed, YUV422Packed, YUV444Packed
RGB color pixel formats	Not applicable	RGB8Packed, BGR8Packed
RAW pixel formats	Not applicable	BayerRG8, BayerRG12, BayerRG12Packed
Exposure time control	12 μs to 84 s; 1 μs increments	
Gain control	0 to 30 dB; 1 dB increments	
Binning	Horizontal: 1 to 8 columns Vertical: 1 to 14 rows	
Power consumption	2.3 W at 12 VDC; 2.7 W PoE	
Trigger latency <sup>1</sup>	Idle state: 8.0 μs; Frame valid state: 25.0 μs	
Trigger jitter <sup>1</sup>	Idle state: ±4.0 μs; Frame valid state: ±21.0 μs	

Table 14: Mako G-125 model series specifications (sheet 1 of 2)

Feature	Specification	
	Mako G-125B	Mako G-125C
Time between exposures	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8, BayerRG12Packed, YUV411Packed	70 $\mu$ s
<sup>1</sup> It is possible to start the exposure of the next frame while the previous frame is read out: <ul style="list-style-type: none"> <li>• Idle state: sensor is ready and camera is idle, waiting for the next trigger.</li> <li>• Frame valid state: sensor is reading out and camera is busy. If next frame is requested by an external trigger in this state, higher latency may occur as compared to the Idle state.</li> </ul>		

*Table 14: Mako G-125 model series specifications (sheet 2 of 2)*

## Absolute QE

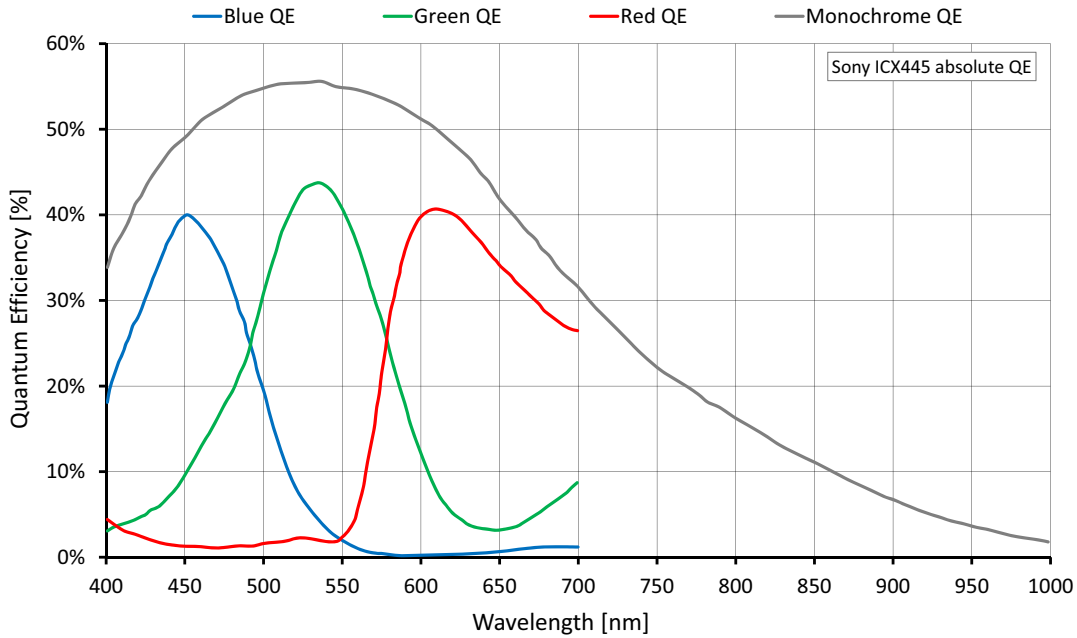


Figure 12: Mako G-125 (Sony ICX445) absolute QE

## Spectral response

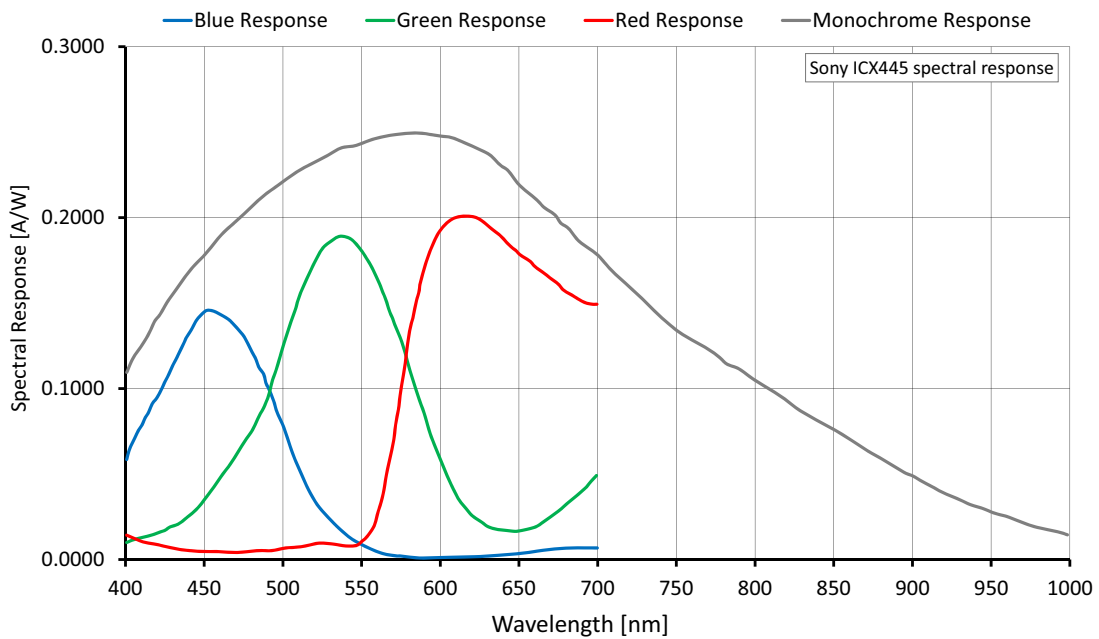


Figure 13: Mako G-125 (Sony ICX445) spectral response

## ROI frame rate

$$\text{Max. frame rate} = \frac{1}{34.01 \mu\text{s} \times \text{ROI height} + 3.09 \mu\text{s} \times (964 - \text{ROI height}) + 176.42 \mu\text{s}}$$

Maximum frame rate at full resolution according to formula: 30.3 fps

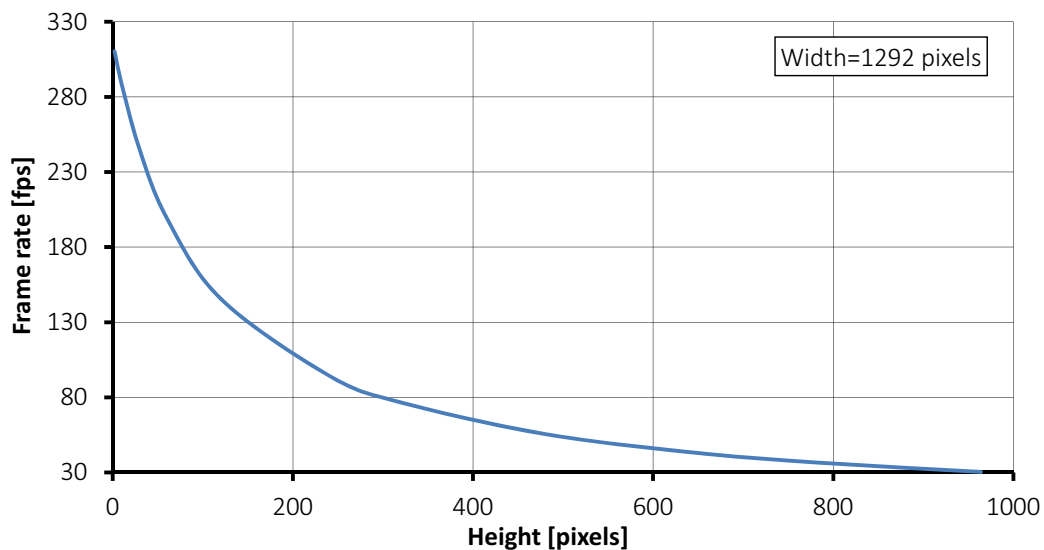


Figure 14: Mako G-125 frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
964	30.3	240	94.4
960	30.4	120	145.5
768	37.1	60	199.3
640	43.5	30	244.5
480	55.5	10	288.1
320	76.5	2	310.3

Table 15: Frame rate as a function of ROI height (Width=1292 pixels)



Frame rate = theoretical maximum frame rate (in fps) of the CCD sensor according to given formula.

## Mako G-131 series

The following table provides model series specifications. The values are valid for Mako G-131B and G-131C models. For specifications common to all models, see [Specifications common to all models](#).

Feature	Specification			
	Mako G-131B		Mako G-131C	
Sensor model	Teledyne e2v EV76C560			
Resolution (H × V)	1280 × 1024; 1.3 MP			
Sensor type	CMOS			
Shutter type	Global, Global Reset, and Rolling shutter			
Sensor format	Type 1/1.8			
Sensor size	8.7 mm diagonal			
Pixel size	5.3 μm × 5.3 μm			
Chief ray angle <sup>1</sup>	12 degrees			
Maximum frame rate at full resolution	62 fps			
Maximum image bit depth	10-bit			
Image buffer	64 MB			
StreamHoldCapacity	Up to 50 frames at full resolution			
Monochrome pixel formats	Mono8, Mono10		Mono8	
YUV color pixel formats	Not applicable		YUV411Packed, YUV422Packed, YUV444Packed	
RGB color pixel formats	Not applicable		RGB8Packed, BGR8Packed	
RAW pixel formats	Not applicable		BayerBG8, BayerBG10	
Exposure time control <sup>2</sup>	<b>Pixel format</b>	<b>Global shutter mode</b>	<b>Global Reset shutter mode</b>	<b>Rolling shutter mode</b>
	Mono8, Mono10, BayerBG8, BayerBG10, YUV411Packed, YUV422Packed	12 μs to 1.012 s; 1 μs increments	12 μs to 0.978 s; 1 μs increments	12 μs to 0.994 s; 1 μs increments
	RGB8Packed, BGR8Packed, YUV444Packed	12 μs to 2.124 s; 1 μs increments	12 μs to 2.053 s; 1 μs increments	12 μs to 2.086 s; 1 μs increments

Table 16: Mako G-131 model series specifications (sheet 1 of 2)



Feature	Specification	
	Mako G-131B	Mako G-131C
Gain control	0 to 24 dB; 1 dB increments	
Binning <sup>3</sup>	Horizontal: 1 to 2 pixels Vertical: 1 to 2 rows Teledyne e2v sensors support 1 × 1 and 2 × 2 binning	
Decimation	Horizontal and Vertical: 1, 2, 4, 8 factor	
Power consumption	2.0 W at 12 VDC; 2.2 W PoE	
Trigger latency <sup>4</sup>	Idle state: 32.6 μs; Frame valid state: 32.6 μs	
Trigger jitter <sup>4</sup>	Idle state: ±8.1 μs; Frame valid state: ±8.1 μs	
Time before exposures	<b>Pixel format</b>	<b>Value</b>
	Mono8, BayerBG8, YUV411Packed	24 μs
<sup>1</sup> For more information on chief ray angle, contact Allied Vision support.		
<sup>2</sup> The Teledyne e2v sensor does not support exposure duration via external level trigger.		
<sup>3</sup> Mako G-131 supports <b>BinningHorizontalMode = Sum</b> or <b>Average</b> and <b>BinningVerticalMode = Sum</b> or <b>Average</b> .		
<sup>4</sup> These values are calculated directly from the microcontroller source. These values are only valid for pixel formats < 16 bits per pixel and applicable in both Idle and Frame valid states:		
<ul style="list-style-type: none"> <li>• Idle state: sensor is ready and camera is idle, waiting for the next trigger.</li> <li>• Frame valid state: sensor is reading out and camera is busy. If next frame is requested by an external trigger in this state, higher latency may occur as compared to the Idle state.</li> </ul>		

Table 16: Mako G-131 model series specifications (sheet 2 of 2)



#### Overlapping exposure and readout

The Teledyne e2v sensor does not support overlapped exposure and readout in hardware trigger mode or in global reset mode.

## Absolute QE

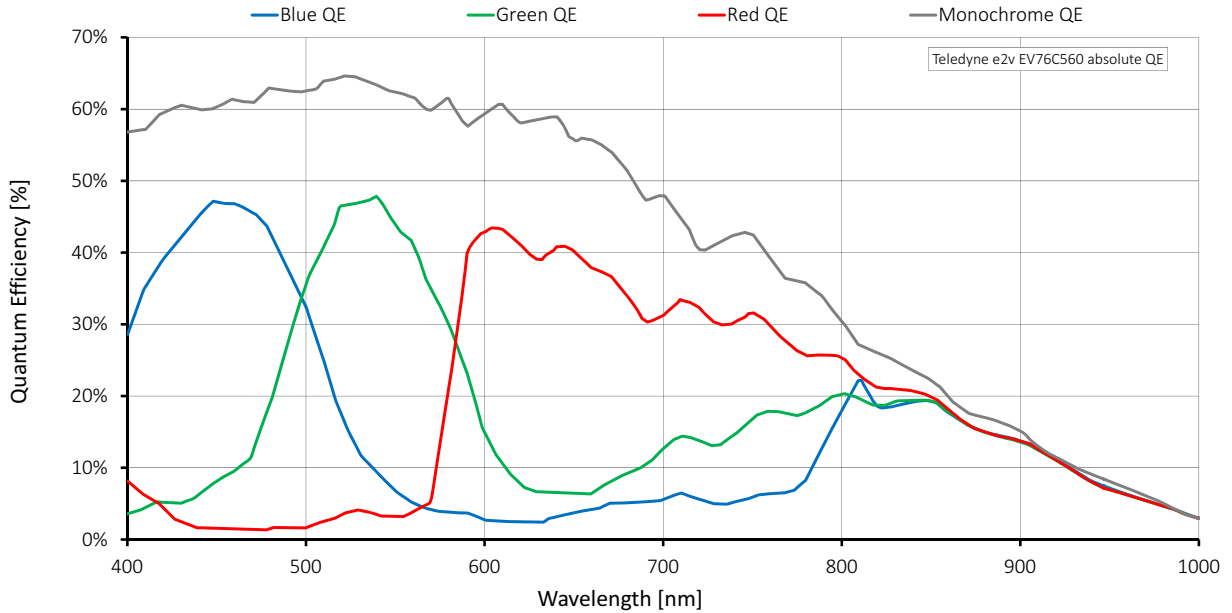


Figure 15: Mako G-131 (Teledyne e2v EV76C560) absolute QE

## Spectral response

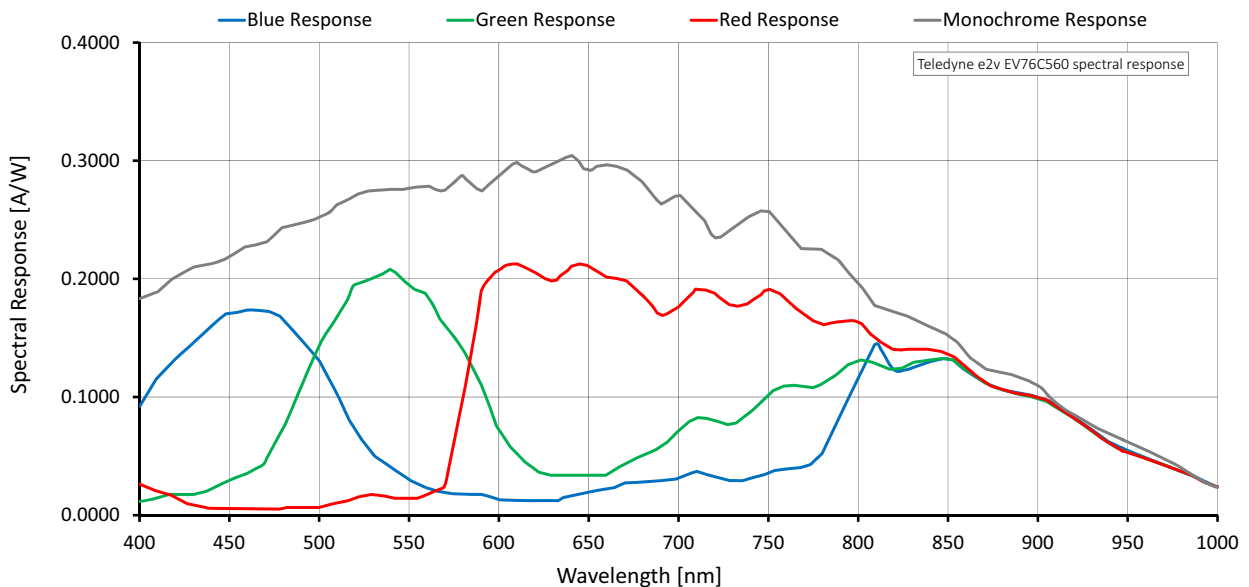


Figure 16: Mako G-131 (Teledyne e2v EV76C560) spectral response

## ROI frame rate

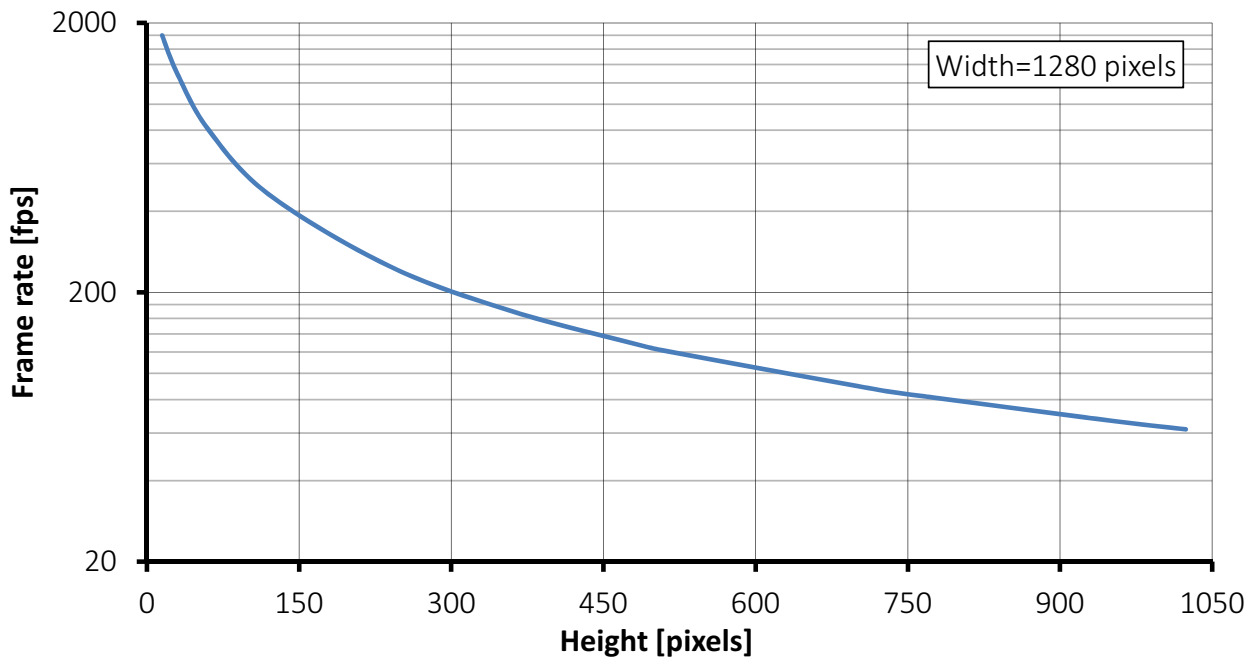


Figure 17: Mako G-131 frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
1024	62.0	360	170.0
960	66.0	240	249.0
768	82.0	120	462.0
720	87.0	60	809.0
512	121.0	30	1295.0
480	129.0	15	1798.0

Table 17: Frame rate as a function of ROI height (Width=1280 pixels)



There is an increase in frame rate with reduced width if the camera is bandwidth limited.

# Mako G-158 series

The following table provides model series specifications. The values are valid for Mako G-158B and G-158C models. For specifications common to all models, see [Specifications common to all models](#).

Feature	Specification	
	Mako G-158B	Mako G-158C
Sensor model	Sony IMX273LLR Exmor	Sony IMX273LQR Exmor
Resolution (H × V)	1456 × 1088; 1.58 MP	
Sensor type	CMOS	
Shutter type	Pregius® global shutter	
Sensor format	Type 1/2.9	
Sensor size	6.3 mm diagonal	
Pixel size	3.45 μm × 3.45 μm	
Chief ray angle <sup>1</sup>	0.0 degrees	
Maximum frame rate at full resolution	75.2 fps (78.9 fps burst mode)	
Maximum image bit depth	12-bit	
Image buffer	64 MB	
StreamHoldCapacity	Up to 41 frames at full resolution	
Monochrome pixel formats	Mono8, Mono12Packed, Mono12	Mono8
YUV color pixel formats	Not applicable	YUV411Packed, YUV422Packed, YUV444Packed
RGB color pixel formats	Not applicable	RGB8Packed, BGR8Packed
RAW pixel formats	Not applicable	BayerRG8, BayerRG12, BayerRG12Packed
Exposure time control <sup>2</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	24 μs to 85.9 s; 11.2 μs increments
	Mono12, BayerRG12, YUV422Packed	28 μs to 85.9 s; 14.88 μs increments
	RGB8Packed, BGR8Packed, YUV444Packed	36 μs to 85.9 s; 22.4 μs increments
Gain control	0 to 40 dB; 0.1 dB increments	
Binning	Horizontal: 1 to 4 pixels; Vertical: 1 to 4 rows	

Table 18: Mako G-158 model series specifications (sheet 1 of 2)

Feature	Specification	
	Mako G-158B	Mako G-158C
Decimation	Horizontal and Vertical: 1, 2, 4, 8 factor	
Power consumption	2.43 W at 12 VDC; 2.68 W PoE	
Trigger latency <sup>3</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	33.6 $\mu$ s
	Mono12, BayerRG12, YUV422Packed	44.64 $\mu$ s
	RGB8Packed, BGR8Packed, YUV444Packed	67.2 $\mu$ s
Trigger jitter <sup>3</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	$\pm$ 5.6 $\mu$ s
	Mono12, BayerRG12, YUV422Packed	$\pm$ 7.44 $\mu$ s
	RGB8Packed, BGR8Packed, YUV444Packed	$\pm$ 11.2 $\mu$ s
Time between exposures	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	210 $\mu$ s
	Mono12, BayerRG12, YUV422Packed	285 $\mu$ s
	RGB8Packed, BGR8Packed, YUV444Packed	434 $\mu$ s

<sup>1</sup> For more information on chief ray angle, contact Allied Vision support.

<sup>2</sup> Whenever pixel format is changed, exposure adjusts itself to the nearest multiple of the exposure increment.

<sup>3</sup> These values are calculated directly from the microcontroller source. There is no differentiation between Idle and Frame valid states for this sensor.

Table 18: Mako G-158 model series specifications (sheet 2 of 2)

## Absolute QE

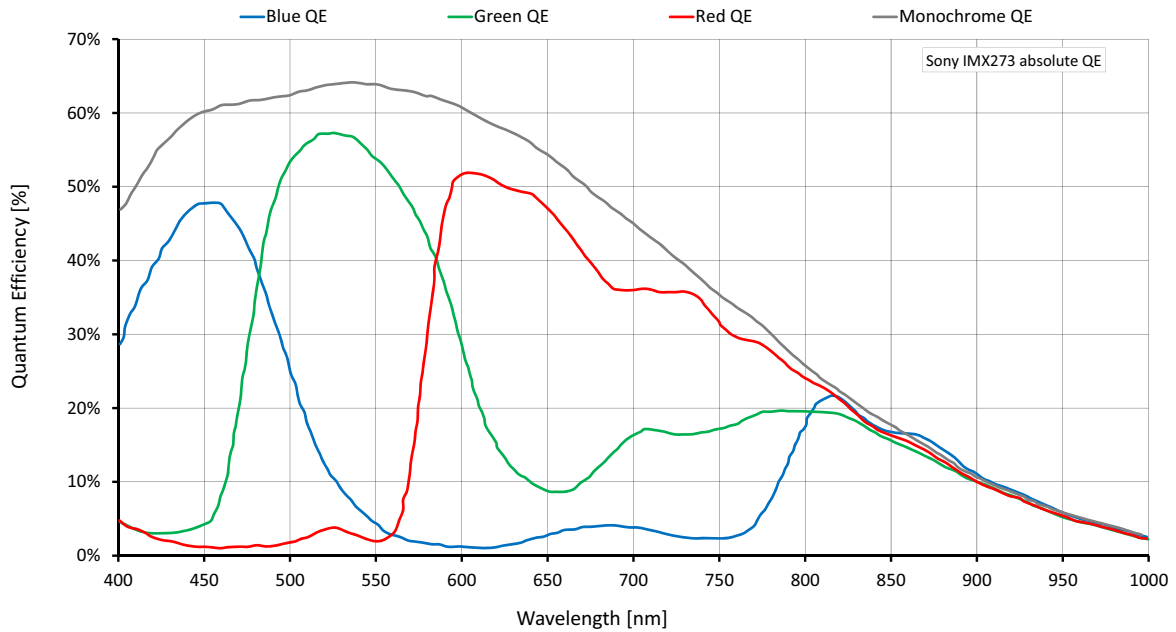


Figure 18: Mako G-158 (Sony IMX273) absolute QE

## Spectral response

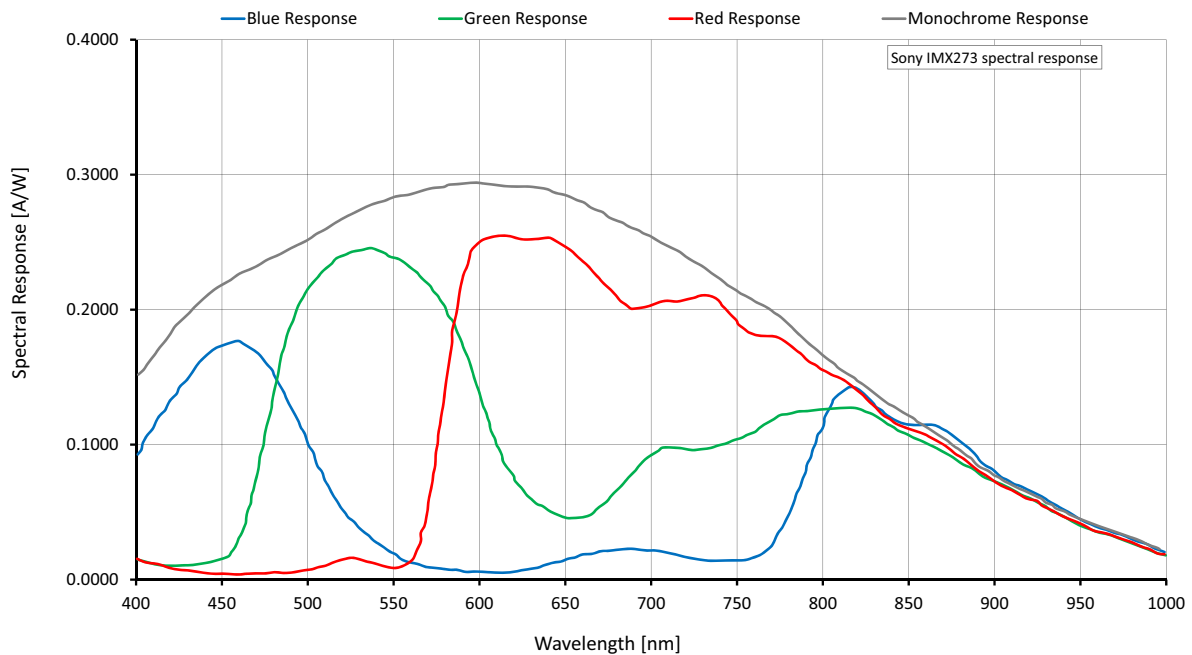


Figure 19: Mako G-158 (Sony IMX273) spectral response

## ROI frame rate

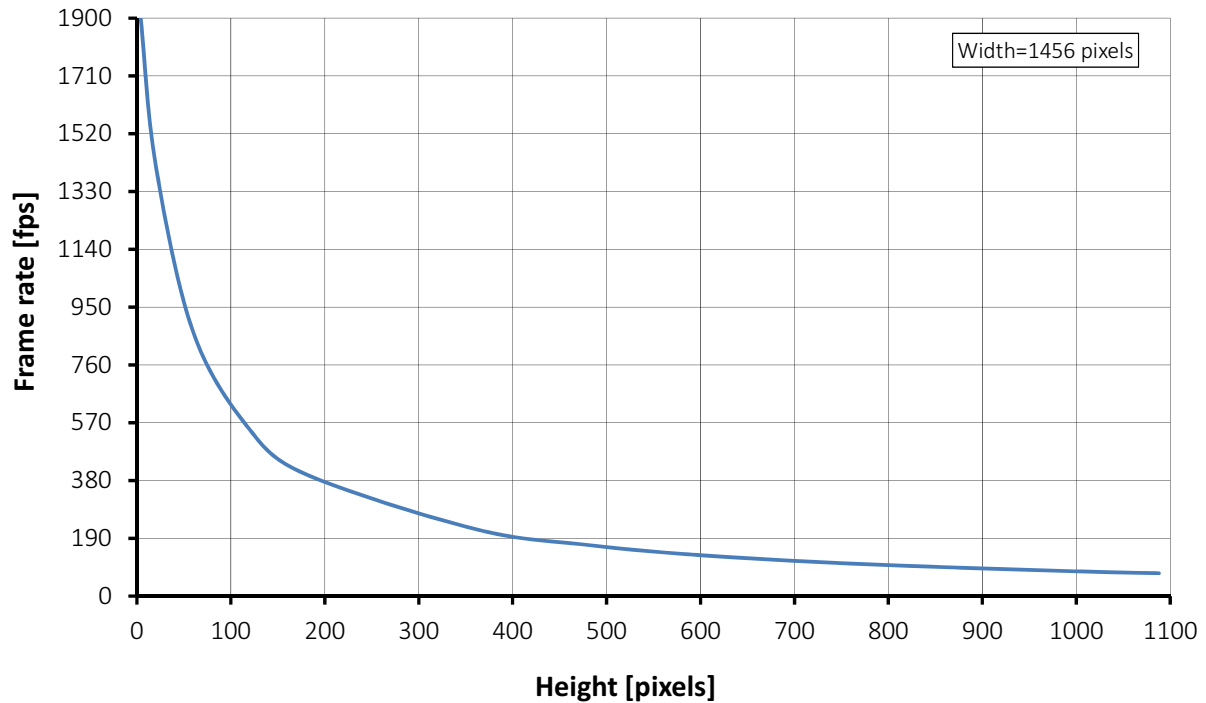


Figure 20: Mako G-158 frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
1088	75.2	360	220.5
1080	75.6	180	400.4
1024	79.6	120	547.8
960	85.2	60	866.9
768	105.9	20	1417.2
600	134.5	4	1899.7
480	168.1		

Table 19: Frame rate as a function of ROI height (Width=1456 pixels)



There is an increase in frame rate with reduced width if the camera is bandwidth limited. Reducing the exposure time may result in higher frame rates.

## Mako G-192 series

The following table provides model series specifications. The values are valid for Mako G-192B and G-192C models. For specifications common to all models, see [Specifications common to all models](#).

Feature	Specification		
	Mako G-192B	Mako G-192C	
Sensor model	Teledyne e2v EV76C570		
Resolution (H × V)	1600 × 1200; 1.9 MP		
Sensor type	CMOS		
Shutter type	Global, Global Reset, and Rolling shutter		
Sensor format	Type 1/1.8		
Sensor size	9 mm diagonal		
Pixel size	4.5 μm × 4.5 μm		
Chief Ray Angle <sup>1</sup>	12 degrees		
Maximum frame rate at full resolution	60 fps		
Maximum image bit depth	10-bit		
Image buffer	64 MB		
StreamHoldCapacity	Up to 34 frames at full resolution		
Monochrome pixel formats	Mono8, Mono10	Mono8	
YUV color pixel formats	Not applicable	YUV411Packed, YUV422Packed, YUV444Packed	
RGB color pixel formats	Not applicable	RGB8Packed, BGR8Packed	
RAW pixel formats	Not applicable	BayerBG8, BayerBG10	
Exposure time control <sup>2</sup>	<b>Pixel format</b>	<b>Global or Rolling shutter mode</b>	<b>Global Reset shutter mode</b>
	Mono8, Mono10, BayerBG8, BayerBG10, YUV411Packed, YUV422Packed	14 μs to 0.891 s; 1 μs increments	14 μs to 0.874 s; 1 μs increments
	RGB8Packed, BGR8Packed, YUV444Packed	14 μs to 1.870 s; 1 μs increments	14 μs to 1.835 s; 1 μs increments
Gain control	0 to 24 dB; 1 dB increments		

Table 20: Mako G-192 model series specifications (sheet 1 of 2)



Feature	Specification	
	Mako G-192B	Mako G-192C
Binning <sup>3</sup>	Horizontal: 1 to 2 pixels Vertical: 1 to 2 rows Teledyne e2v sensors support 1x1 and 2x2 binning.	
Decimation	Horizontal and Vertical: 1, 2, 4, 8 factor	
Power consumption	2.1 W at 12 VDC; 2.4 W PoE	
Trigger latency <sup>4</sup>	Idle state: 27.7 $\mu$ s; Frame valid state: 27.7 $\mu$ s	
Trigger jitter <sup>4</sup>	Idle state: $\pm$ 6.9 $\mu$ s; Frame valid state: $\pm$ 6.9 $\mu$ s	
Time between exposures	<b>Pixel format</b>	<b>Value</b>
	Mono8, BayerBG8, YUV411Packed	34 $\mu$ s
<sup>1</sup> For more information on chief ray angle, contact Allied Vision support.		
<sup>2</sup> The Teledyne e2v sensor does not support exposure duration via external level trigger.		
<sup>3</sup> Mako G-192 supports <b>BinningHorizontalMode = Sum</b> or <b>Average</b> and <b>BinningVerticalMode = Sum</b> or <b>Average</b> .		
<sup>4</sup> These values are calculated directly from the microcontroller source. These values are only valid for pixel formats < 16 bits per pixel and applicable in both Idle and Frame valid state: <ul style="list-style-type: none"> <li>• Idle state: sensor is ready and camera is idle, waiting for the next trigger.</li> <li>• Frame valid state: sensor is reading out and camera is busy. If next frame is requested by an external trigger in this state, higher latency may occur as compared to the Idle state.</li> </ul>		

Table 20: Mako G-192 model series specifications (sheet 2 of 2)



#### Overlapping exposure and readout

The Teledyne e2v sensor does not support overlapped exposure and readout in hardware trigger mode or in global reset mode.

## Absolute QE

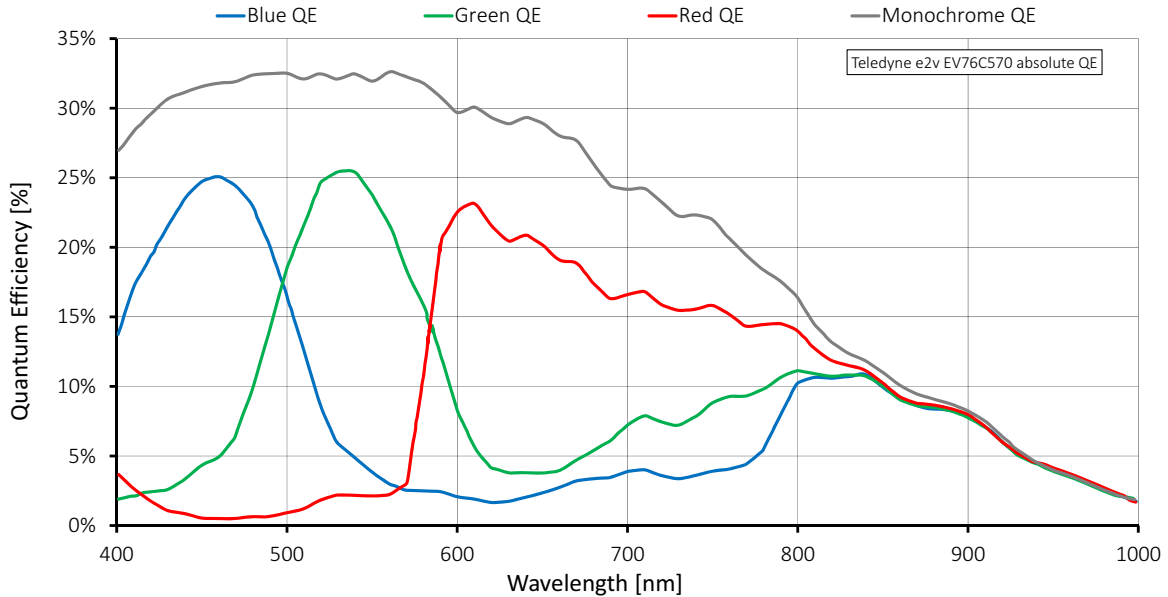


Figure 21: Mako G-192 (Teledyne e2v EV76C570) absolute QE

## Spectral response

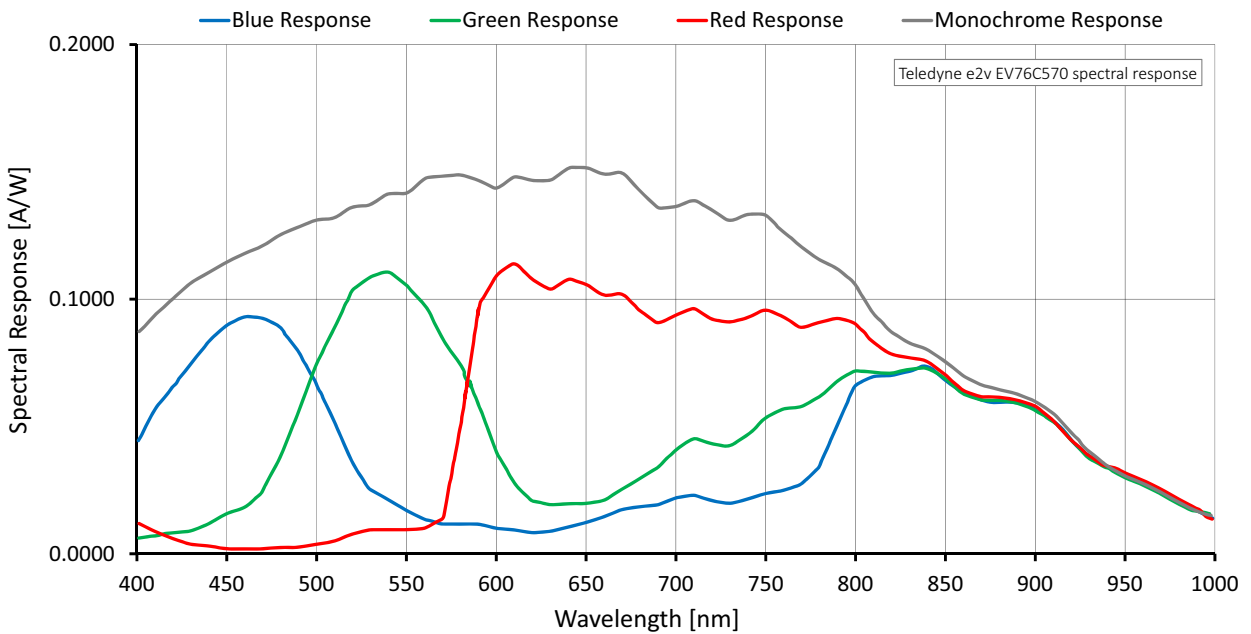


Figure 22: Mako G-192 (Teledyne e2v EV76C570) absolute QE

## ROI frame rate

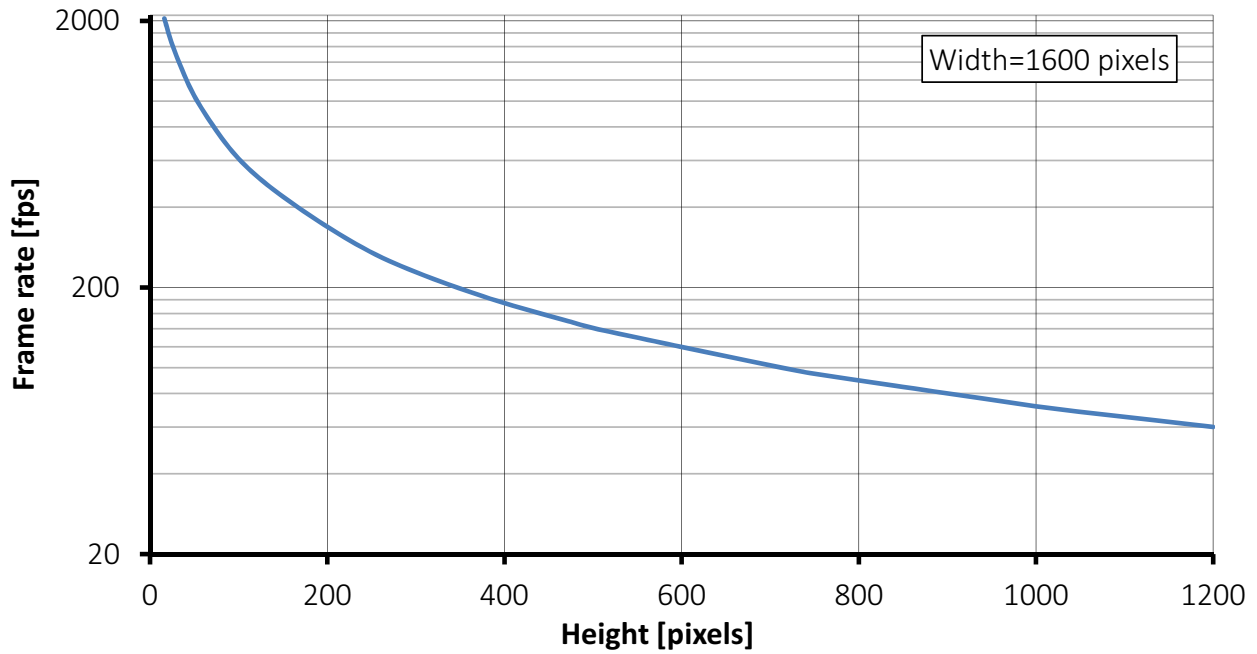


Figure 23: Mako G-192 frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
1200	60.0	360	193.0
1024	70.0	240	282.0
960	75.0	120	525.0
768	93.0	60	919.0
720	99.0	30	1470.0
512	138.0	16	2042.0
480	147.0		

Table 21: Frame rate as a function of ROI height (Width=1600 pixels)



There is an increase in frame rate with reduced width if the camera is bandwidth limited.

## Mako G-223 series

The following table provides model series specifications. The values are valid for Mako G-223B, G-223B NIR, and G-223C models. For specifications common to all models, see [Specifications common to all models](#).

Feature	Specification	
	Mako G-223B, G-223B NIR	Mako G-223C
Sensor model	CMOSIS/ams CMV2000 with microlens	
Resolution (H × V)	2048 × 1088; 2.2 MP	
Sensor type	CMOS	
Shutter type	Global shutter	
Sensor format	Type 2/3	
Sensor size	12.7 mm diagonal	
Pixel size	5.5 μm × 5.5 μm	
Maximum frame rate at full resolution	49.5 fps	
Maximum image bit depth	12-bit	
Image buffer	64 MB	
StreamHoldCapacity	Up to 29 frames at full resolution	
Monochrome pixel formats	Mono8, Mono12Packed, Mono12	Mono8
YUV color pixel formats	Not applicable	YUV411Packed, YUV422Packed, YUV444Packed
RGB color pixel formats	Not applicable	RGB8Packed, BGR8Packed
RAW pixel formats	Not applicable	BayerGB8, BayerGB12, BayerGB12Packed
Exposure time control <sup>1</sup>	30 μs to 153 s; 1 μs increments	
Gain control	0 to 26 dB; 1 dB increments	
Power consumption	2.4 W at 12 VDC; 2.8 W PoE	
Trigger latency <sup>2</sup>	3.205 μs	
Trigger jitter <sup>2</sup>	±0.15 μs	

Table 22: Mako G-223 model series specifications (sheet 1 of 2)

Feature	Specification	
	Mako G-223B, G-223B NIR	Mako G-223C
Time between exposures	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerGB8, BayerGB12Packed, YUV411Packed	84 $\mu$ s

<sup>1</sup> Camera firmware version  $\leq$  01.52.8151 or later shows minimum exposure values without frame overhead time, that is, 1  $\mu$ s. See the sensor data sheet for details on frame overhead time.

<sup>2</sup> Trigger latency and trigger jitter values were measured at the external I/O (8-bit pixel format).

*Table 22: Mako G-223 model series specifications (sheet 2 of 2)*

## Absolute QE

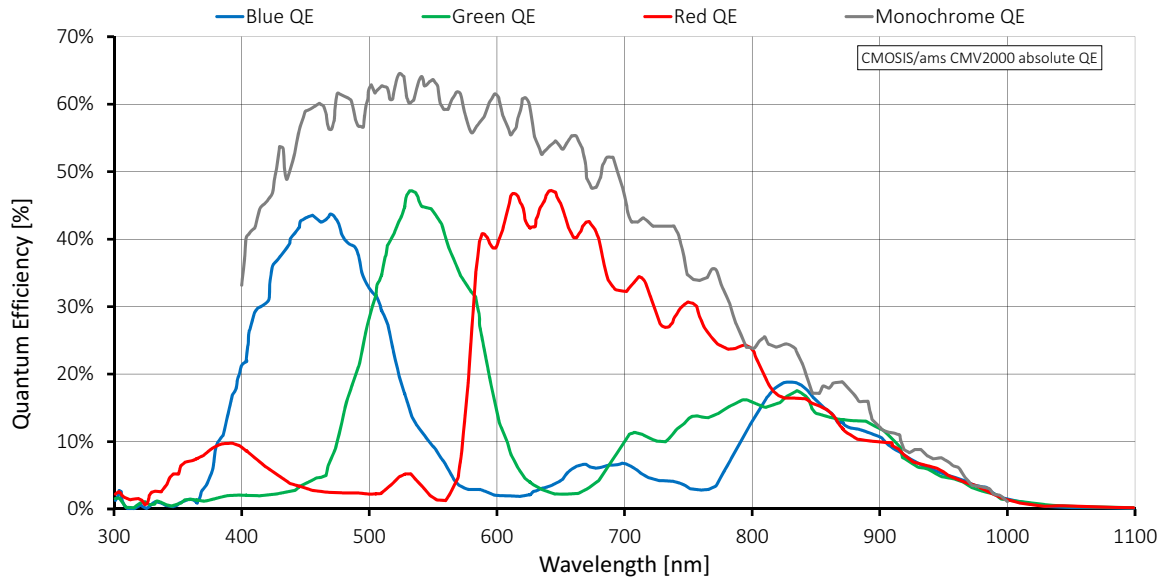


Figure 24: Mako G-223 (CMOSIS/ams CMV2000) absolute QE

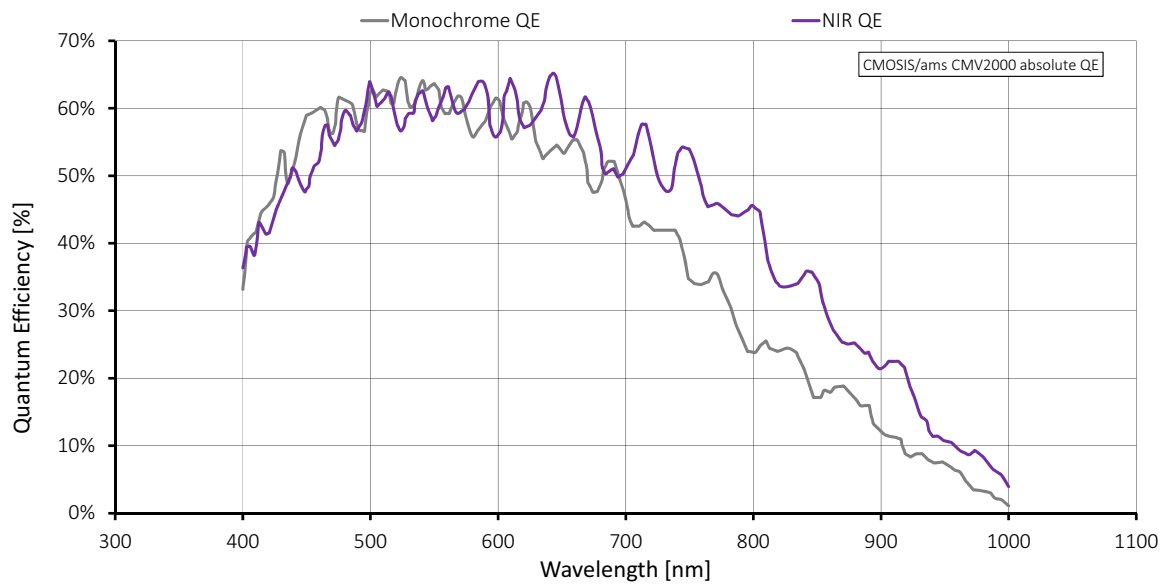


Figure 25: Mako G-223B NIR (CMOSIS/ams CMV2000) absolute QE

## Spectral response

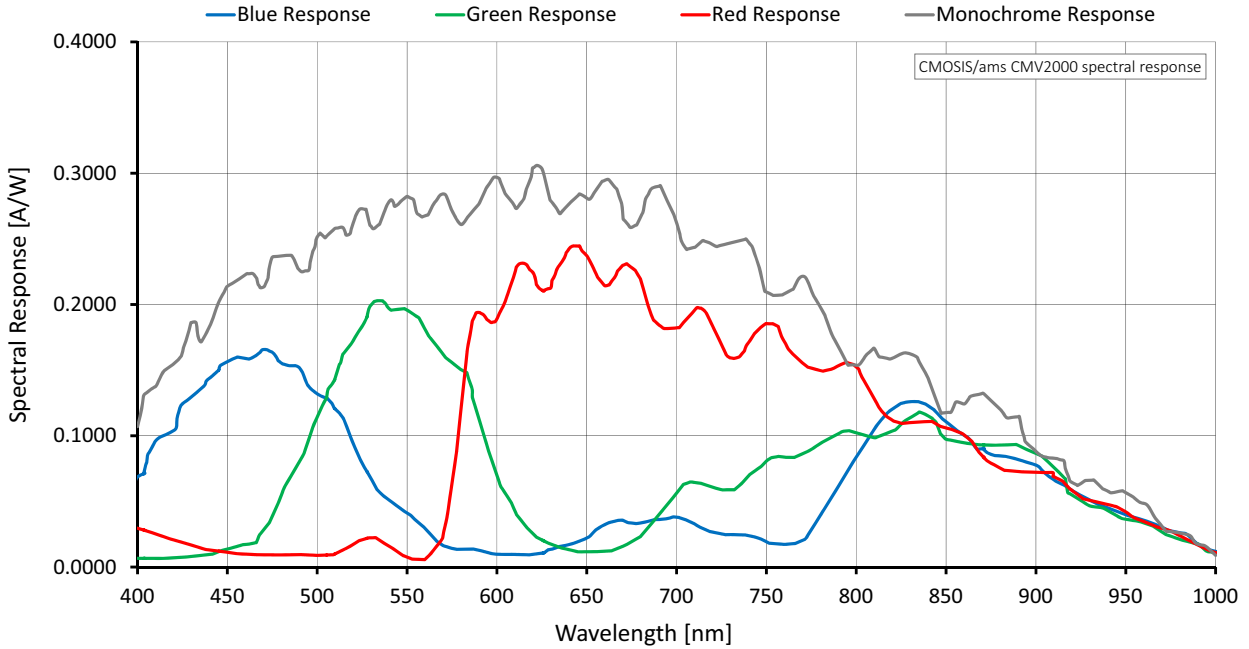


Figure 26: Mako G-223 (CMOSIS/ams CMV2000) spectral response

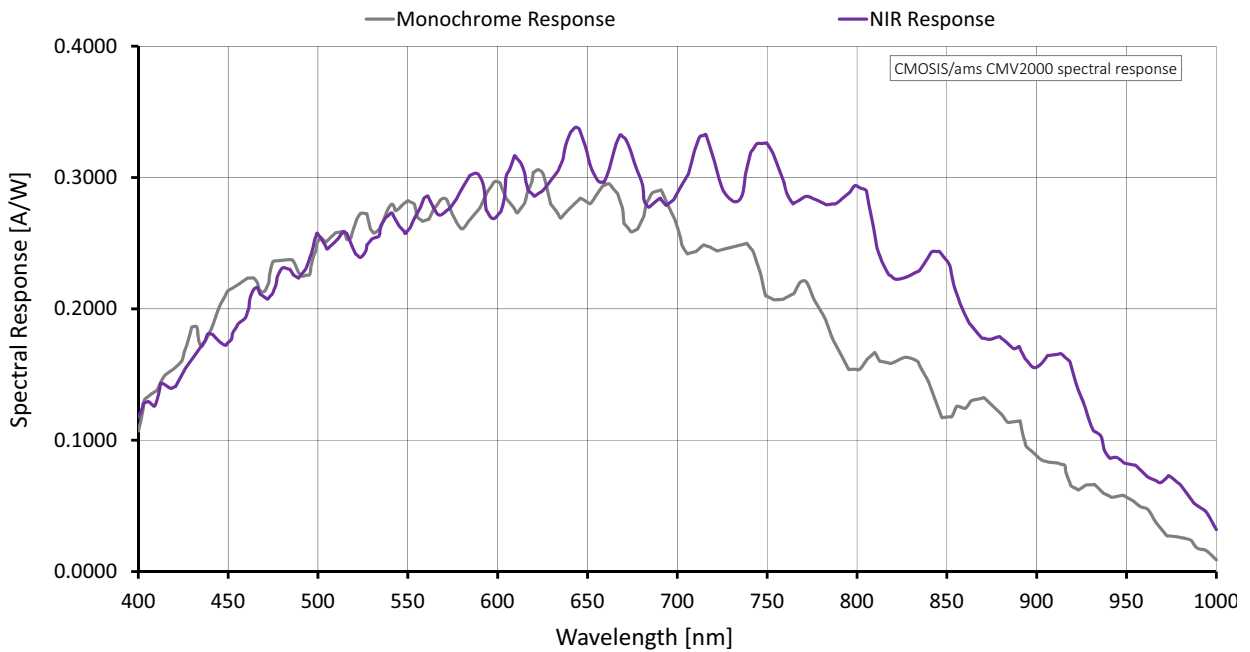


Figure 27: Mako G-223B NIR (CMOSIS/ams CMV2000) spectral response

## ROI frame rate

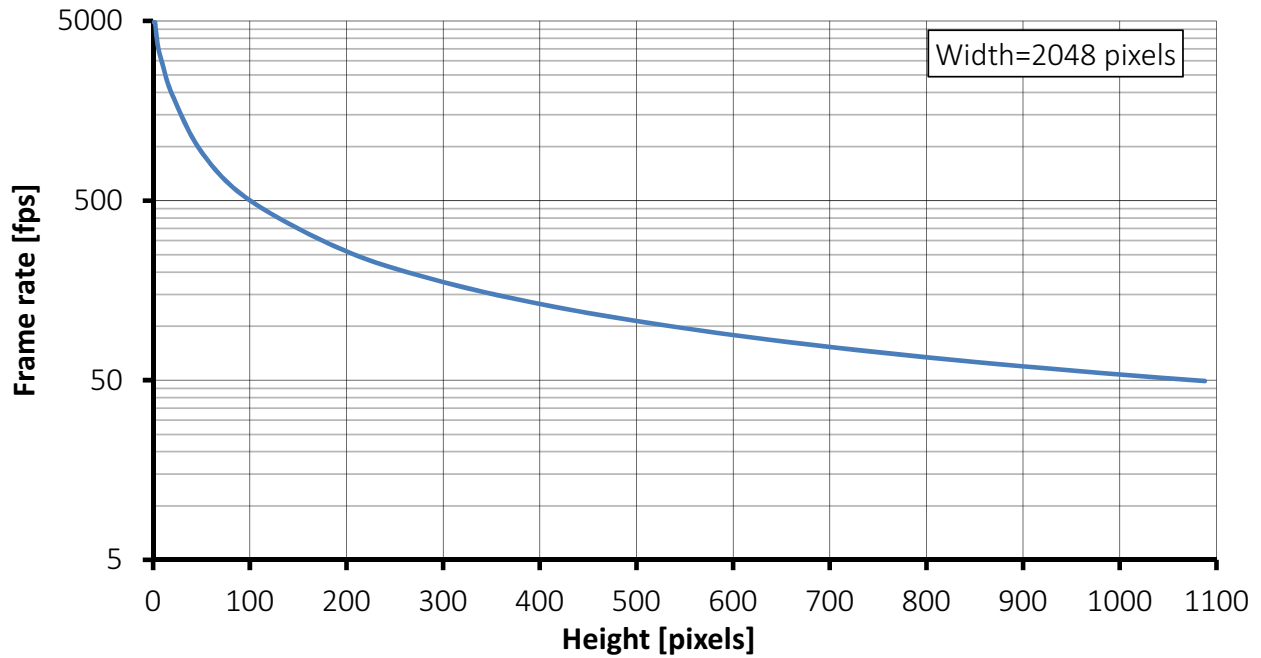


Figure 28: Mako G-223 frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
1088	49.5	200	260.8
1000	53.8	100	502.1
900	59.7	50	934.6
800	67.1	20	1933.8
700	76.6	10	2847.3
600	89.2	5	3624.5
500	106.8	2	4906.7
400	132.9	1	4926.1
300	176.1		

Table 23: Frame rate as a function of ROI height (Width=2048 pixels)



There is an increase in frame rate with reduced width if the camera is bandwidth limited.



## Mako G-234 series

The following table provides model series specifications. The values are valid for Mako G-234B and G-234C models. For specifications common to all models, see [Specifications common to all models](#).

Feature	Specification	
	Mako G-234B	Mako G-234C
Sensor model	Sony IMX249LLJ Exmor	Sony IMX249LQJ Exmor
Resolution (H × V)	1936 × 1216; 2.35 MP	
Sensor type	CMOS	
Shutter type	Pregius® global shutter	
Sensor format	Type 1/1.2	
Sensor size	13.4 mm diagonal	
Pixel size	5.86 μm × 5.86 μm	
Chief Ray Angle <sup>1</sup>	0.0 degrees	
Sensor output	10-bit or 12-bit	
Maximum frame rate at full resolution	41.5 fps (10-bit); 32.3 fps (12-bit)	
Maximum image bit depth	12-bit	
Image buffer	64 MB	
StreamHoldCapacity	Up to 28 frames at full resolution	
Monochrome pixel formats	Mono8, Mono12Packed, Mono12	Mono8
YUV color pixel formats	Not applicable	YUV411Packed, YUV422Packed, YUV444Packed
RGB color pixel formats	Not applicable	RGB8Packed, BGR8Packed
RAW pixel formats	Not applicable	BayerRG8, BayerRG12, BayerRG12Packed
Exposure time control <sup>2</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12, Mono12Packed, BayerRG8, BayerRG12, BayerRG12Packed, YUV411Packed, YUV422Packed	32 μs to 71.6 s; 19.2 μs increments (10-bit) 38 μs to 85.9 s; 24.64 μs increments (12-bit)

Table 24: Mako G-234 model series specifications (sheet 1 of 2)

Feature	Specification	
	Mako G-234B	Mako G-234C
	RGB8Packed, BGR8Packed, YUV444Packed	52 $\mu$ s to 71.6 s; 38.4 $\mu$ s increments (10-bit) 63 $\mu$ s to 85.9 s; 49.28 $\mu$ s increments (12-bit)
Gain control	0 to 40 dB; 0.1 dB increments	
Binning	Horizontal: 1 to 4 pixels; Vertical: 1 to 4 rows	
Decimation	Horizontal and Vertical: 1, 2, 4, 8 factor	
Power consumption	2.4 W at 12 VDC; 2.8 W PoE	
Trigger latency <sup>3</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, BayerRG8, BayerRG12, BayerRG12Packed, YUV411Packed, YUV422Packed	57.6 $\mu$ s (10-bit), 73.92 $\mu$ s (12-bit)
	RGB8Packed, BGR8Packed, YUV444Packed	115.2 $\mu$ s (10-bit), 147.84 $\mu$ s (12-bit)
Trigger jitter <sup>3</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, BayerRG8, BayerRG12, BayerRG12Packed, YUV411Packed, YUV422Packed	$\pm$ 9.6 $\mu$ s (10-bit), $\pm$ 12.32 $\mu$ s (12-bit)
	RGB8Packed, BGR8Packed, YUV444Packed	$\pm$ 19.2 $\mu$ s (10-bit), $\pm$ 24.64 $\mu$ s (12-bit)
Time between exposures	<b>Pixel format</b>	<b>Value</b>
	Mono8, BayerRG8, BayerRG12, BayerRG12Packed, YUV411Packed, YUV422Packed	275 $\mu$ s (10-bit), 356 $\mu$ s (12-bit)
	RGB8Packed, BGR8Packed, YUV444Packed	563 $\mu$ s (10-bit), 726 $\mu$ s (12-bit)
<sup>1</sup> For more information on chief ray angle, contact Allied Vision support. <sup>2</sup> Whenever pixel format is changed, Exposure adjusts itself to the nearest multiple of the exposure increment. <sup>3</sup> These values are calculated directly from the microcontroller source. There is no differentiation between Idle and Frame valid states for this sensor.		

Table 24: Mako G-234 model series specifications (sheet 2 of 2)



With 10-bit sensor readout mode you can achieve a higher frame rate. The sensor is capable of higher frame rates but readout is limited by GigE bandwidth and exposure value. You can improve frame rates with a reduced ROI and shorter exposure values.

For more information on **SensorReadoutMode**, see the GigE Features Reference.

## Absolute QE

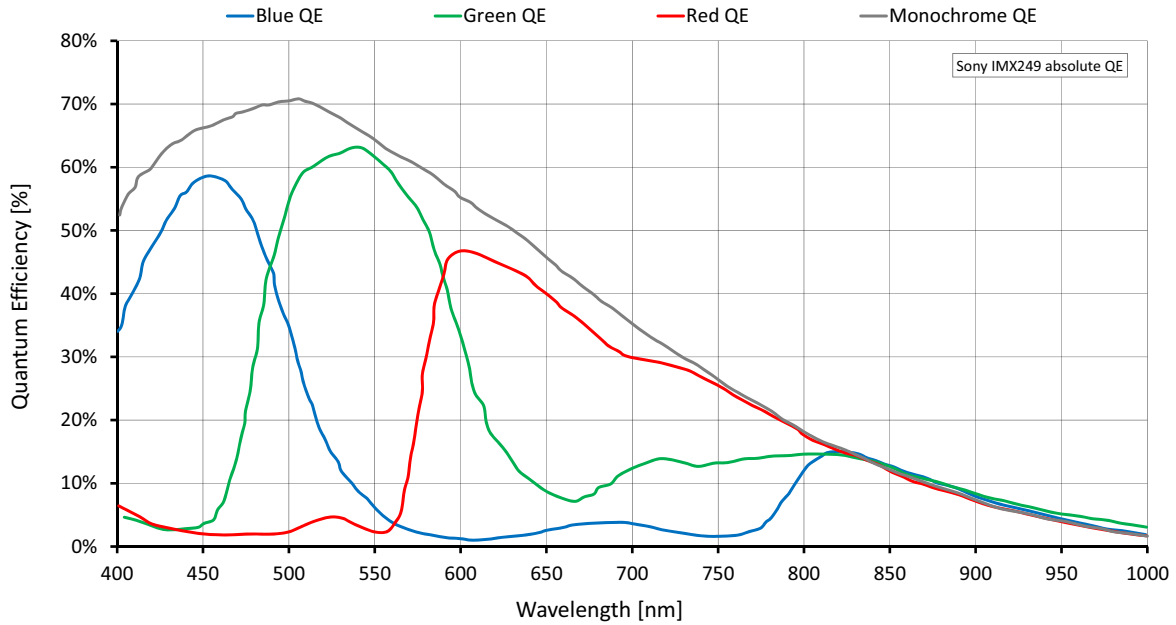


Figure 29: Mako G-234 (Sony IMX249) absolute QE

## Spectral response

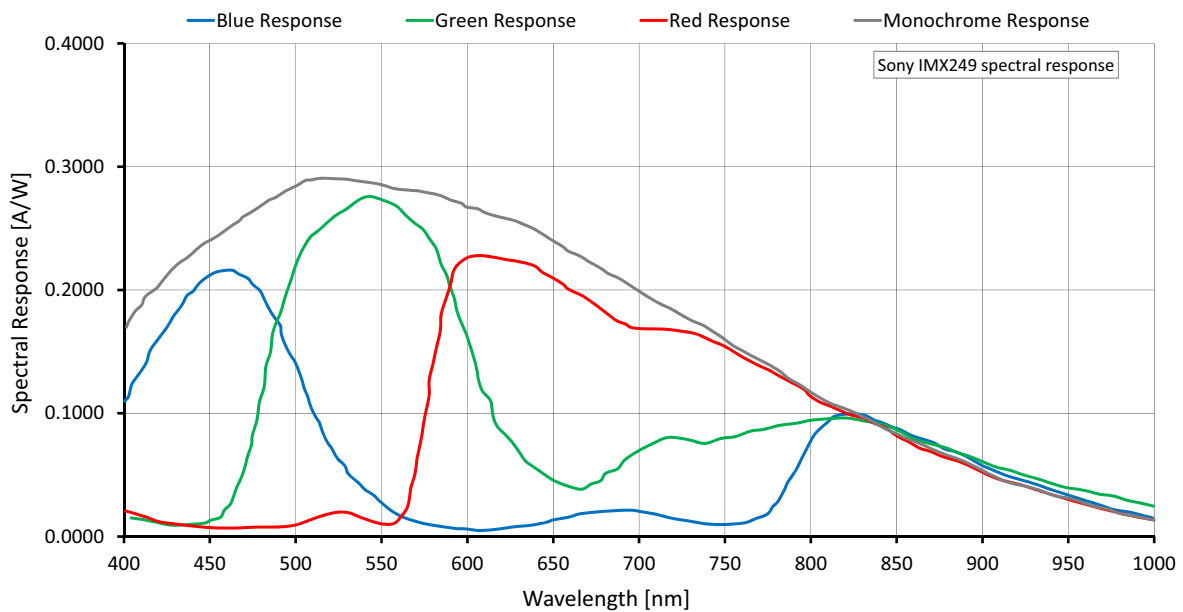


Figure 30: Mako G-234 (Sony IMX249) spectral response

## ROI frame rate

### 12-bit sensor readout

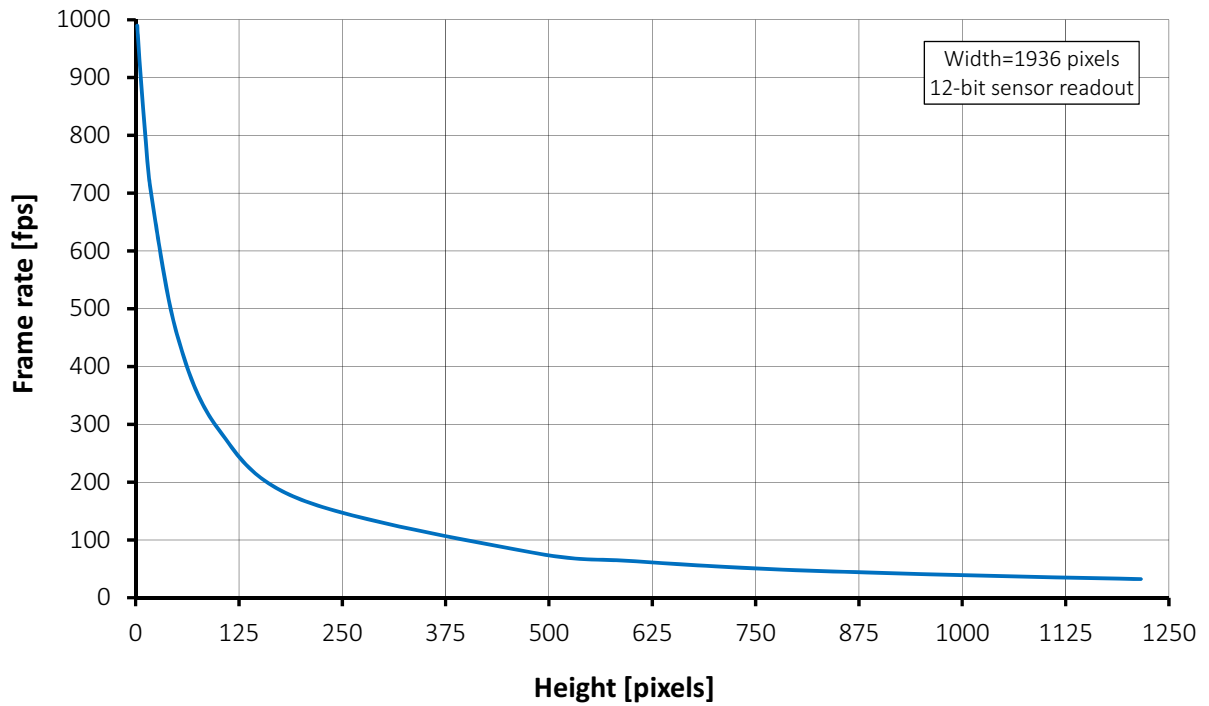


Figure 31: Mako G-234 12-bit sensor frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
1216	32.3	200	169.8
1080	36.3	100	292.0
1024	38.2	50	456.0
960	40.6	20	687.8
768	50.3	12	795.7
600	63.5	4	943.7
480	78.2	2	989.8

Table 25: Mako G-234 12-bit sensor frame rate as a function of ROI height (Width=1936 pixels)

## 10-bit sensor readout

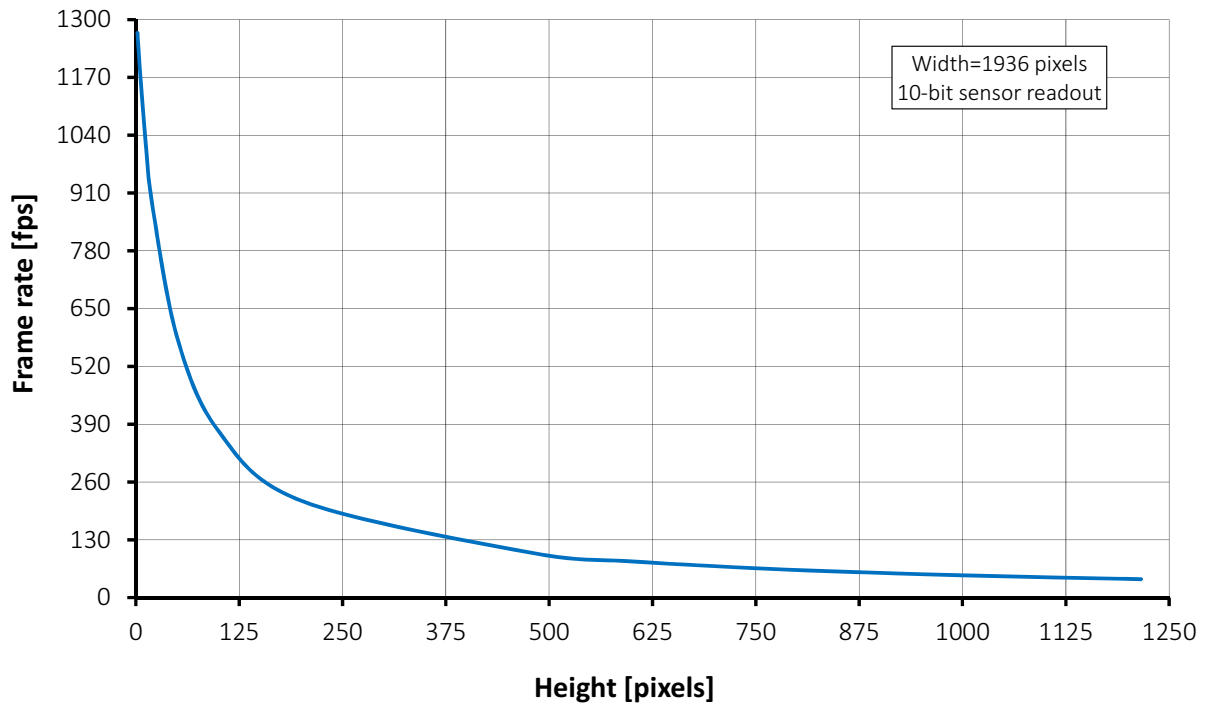


Figure 32: Mako G-234 10-bit sensor frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
1216	41.5	200	217.9
1080	46.5	100	374.7
1024	49.0	50	585.2
960	52.1	20	882.8
768	64.5	12	1021.2
600	81.5	4	1211.2
480	100.3	2	1270.3

Table 26: Mako G-234 10-bit sensor frame rate as a function of ROI height (Width=1936 pixels)

## Mako G-319 series

The following table provides model series specifications. The values are valid for Mako G-319B and G-319C models. For specifications common to all models, see [Specifications common to all models](#).

Feature	Specification	
	Mako G-319B	Mako G-319C
Sensor model	Sony IMX265LLR Exmor	Sony IMX265LQR Exmor
Resolution (H × V)	2064 × 1544; 3.2 MP	
Sensor type	CMOS	
Shutter type	Pregius® global shutter	
Sensor format	Type 1/1.8	
Sensor size	8.9 mm diagonal	
Pixel size	3.45 μm × 3.45 μm	
Chief ray angle <sup>1</sup>	0.0 degrees	
Maximum frame rate at full resolution	37.6 fps (39.5 fps burst mode)	
Maximum image bit depth	12-bit	
Image buffer	64 MB	
StreamHoldCapacity	Up to 20 frames at full resolution	
Monochrome pixel formats	Mono8, Mono12Packed, Mono12	Mono8
YUV color pixel formats	Not applicable	YUV411Packed, YUV422Packed, YUV444Packed
RGB color pixel formats	Not applicable	RGB8Packed, BGR8Packed
RAW pixel formats	Not applicable	BayerRG8, BayerRG12, BayerRG12Packed
Exposure time control <sup>2</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	29 μs to 85.9 s; 16 μs increments
	Mono12, BayerRG12, YUV422Packed	35 μs to 85.9 s; 21.28 μs increments
	RGB8Packed, BGR8Packed, YUV444Packed	45 μs to 85.9 s; 32 μs increments
Gain control	0 to 40 dB; 0.1 dB increments	

Table 27: Mako G-319 model series specifications (sheet 1 of 2)

Feature	Specification	
	Mako G-319B	Mako G-319C
Binning	Horizontal: 1 to 4 pixels Vertical: 1 to 4 rows	Horizontal: 1 to 4 pixels
Decimation	Horizontal and Vertical: 1, 2, 4, 8 factor	
Power consumption	2.5 W at 12 VDC; 2.7 W PoE	
Trigger latency <sup>3</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	48 $\mu$ s
	Mono12, BayerRG12, YUV422Packed	63.84 $\mu$ s
	RGB8Packed, BGR8Packed, YUV444Packed	96 $\mu$ s
Trigger jitter <sup>3</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	$\pm$ 8 $\mu$ s
	Mono12, BayerRG12, YUV422Packed	$\pm$ 10.64 $\mu$ s
	RGB8Packed, BGR8Packed, YUV444Packed	$\pm$ 16 $\mu$ s
Time between exposures	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	227 $\mu$ s
	Mono12, BayerRG12, YUV422Packed	306 $\mu$ s
	RGB8Packed, BGR8Packed, YUV444Packed	467 $\mu$ s

<sup>1</sup> For more information on chief ray angle, contact Allied Vision support.

<sup>2</sup> Whenever **PixelFormat** is changed, exposure adjusts itself to the nearest multiple of the exposure increment.

<sup>3</sup> These values are calculated directly from the microcontroller source. There is no differentiation between Idle and Frame valid states for this sensor.

Table 27: Mako G-319 model series specifications (sheet 2 of 2)

## Absolute QE

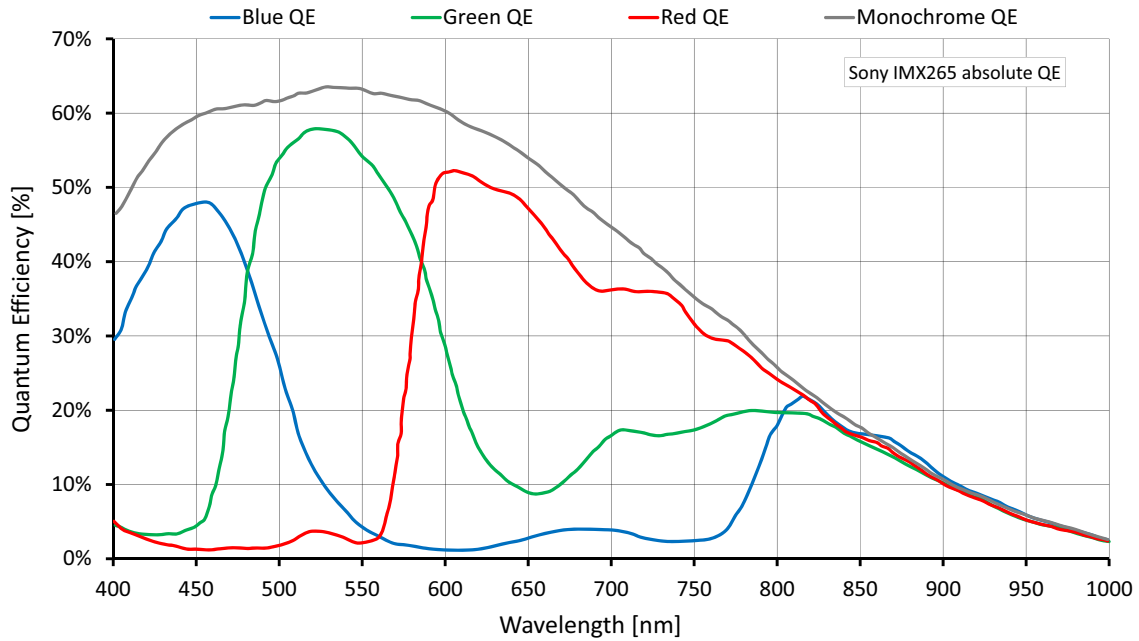


Figure 33: Mako G-319 (Sony IMX265) absolute QE

## Spectral response

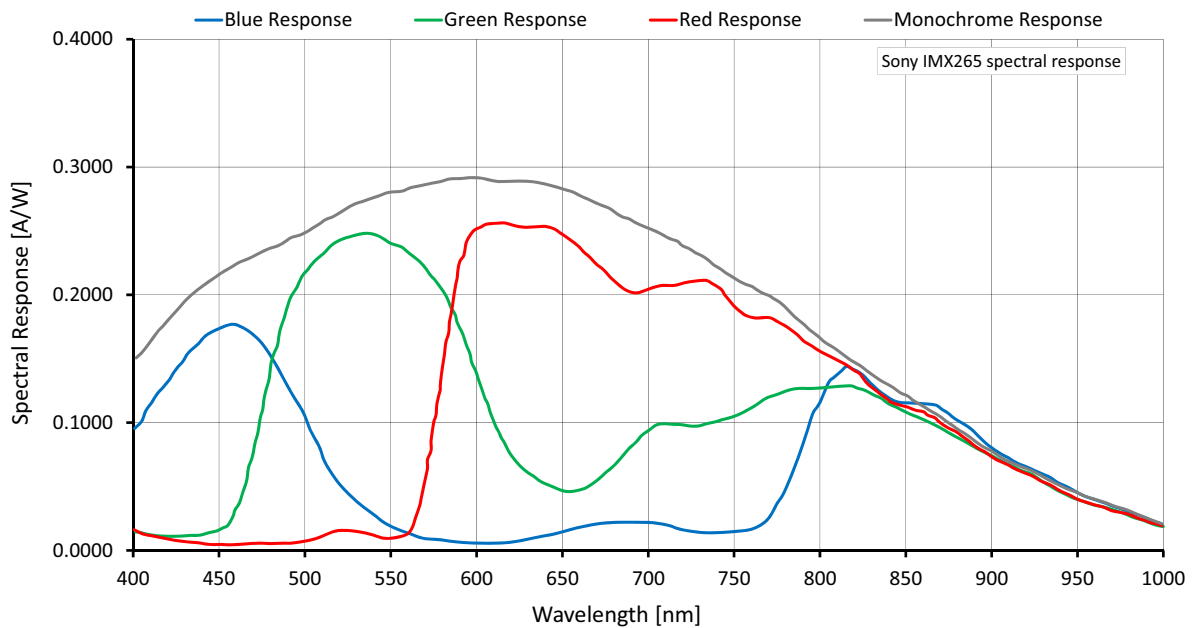


Figure 34: Mako G-319 (Sony IMX265) spectral response



## ROI frame rate

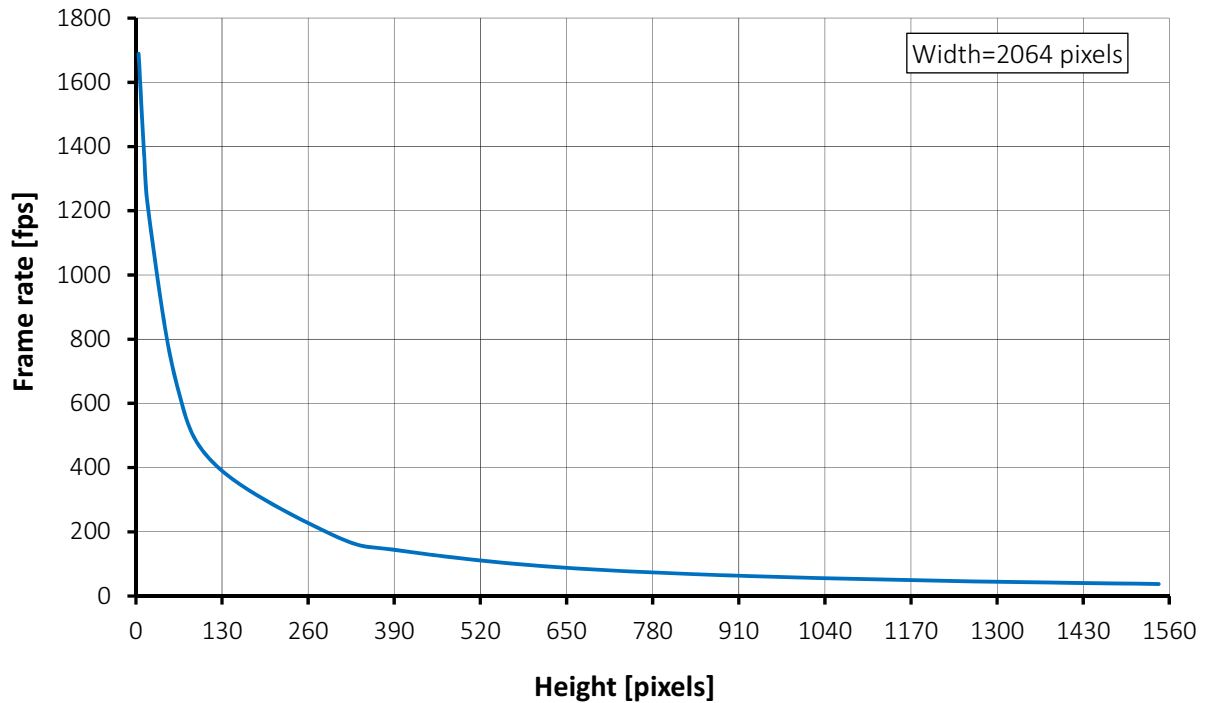


Figure 35: Mako G-319 frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
1544	37.6	300	187.7
1280	45.2	120	408.5
1024	56.5	60	672.0
800	71.9	20	1179.2
600	95.4	12	1388.9
400	141.4	4	1689.2

Table 28: Frame rate as a function of ROI height (Width=2064 pixels)



There is an increase in frame rate with reduced width if the camera is bandwidth limited. Reducing the exposure time may result in higher frame rates.

## Mako G-419 series

The following table provides model series specifications. The values are valid for Mako G-419B, G-419B NIR, and G-419C models. For specifications common to all models, see [Specifications common to all models](#).

Feature	Specification	
	Mako G-419B, G-419B NIR	Mako G-419C
Sensor model	CMOSIS/ams CMV4000	
Resolution (H × V)	2048 × 2048; 4.2 MP	
Sensor type	CMOS	
Shutter type	Global shutter	
Sensor format	Type 1	
Sensor size	16.0 mm diagonal	
Pixel size	5.5 μm × 5.5 μm	
Maximum frame rate at full resolution	26.3 fps	
Maximum image bit depth	12-bit	
Image buffer	64 MB	
StreamHoldCapacity	Up to 15 frames at full resolution	
Monochrome pixel formats	Mono8, Mono12Packed, Mono12	Mono8
YUV color pixel formats	Not applicable	YUV411Packed, YUV422Packed, YUV444Packed
RGB color pixel formats	Not applicable	RGB8Packed, BGR8Packed
RAW pixel formats	Not applicable	BayerGB8, BayerGB12, BayerGB12Packed
Exposure time control <sup>1</sup>	41 μs to 153 s; 1 μs increments	
Gain control	0 to 26 dB; 1 dB increments	
Power consumption	2.3 W at 12 VDC; 2.7 W PoE	
Trigger latency	3.48 μs	
Trigger jitter	±0.15 μs	

Table 29: Mako G-419 model series specifications (sheet 1 of 2)

Feature	Specification	
	Mako G-419B, G-419B NIR	Mako G-419C
Time between exposures	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerGB8, BayerGB12Packed, YUV411Packed	130 $\mu$ s
<sup>1</sup> Camera firmware version $\leq$ 01.52.8151 shows minimum exposure values without frame overhead time; 1 $\mu$ s. See the sensor data sheet for details on frame overhead time.		
<sup>2</sup> Trigger latency and trigger jitter values were measured at the external I/O (8-bit pixel format).		

*Table 29: Mako G-419 model series specifications (sheet 2 of 2)*

## Absolute QE

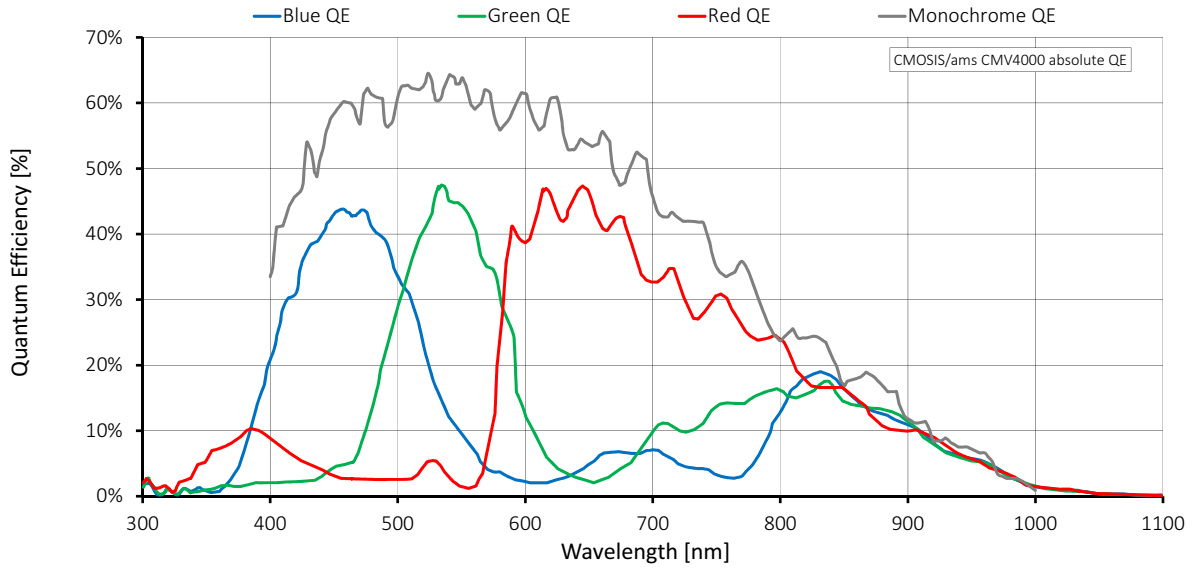


Figure 36: Mako G-419 (CMOSIS/ams CMV4000) absolute QE

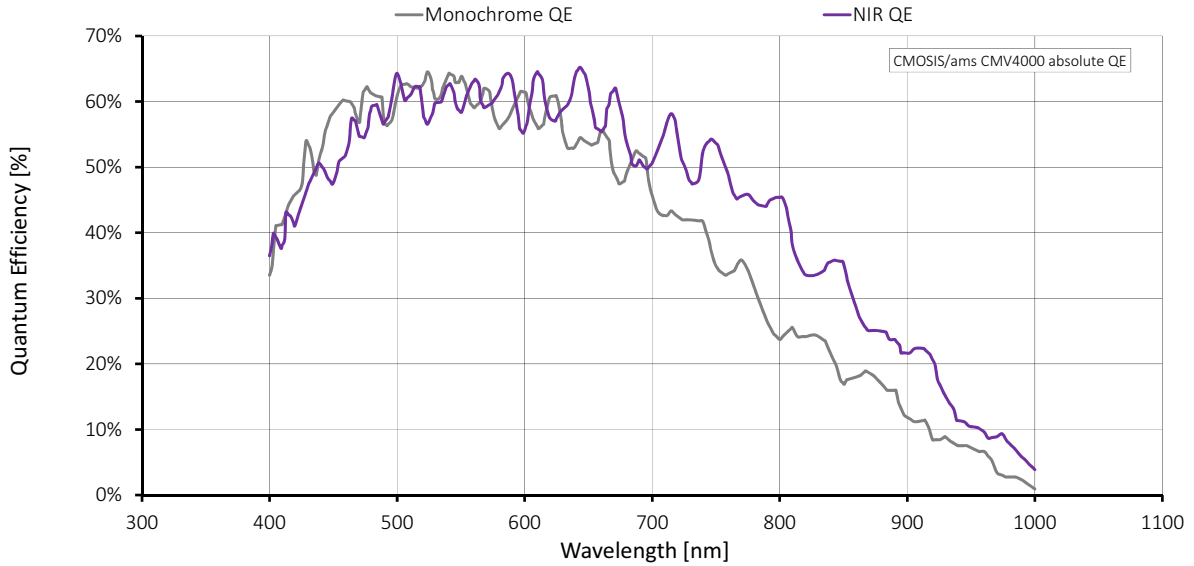


Figure 37: Mako G-419B NIR (CMOSIS/ams CMV4000) absolute QE

## Spectral response

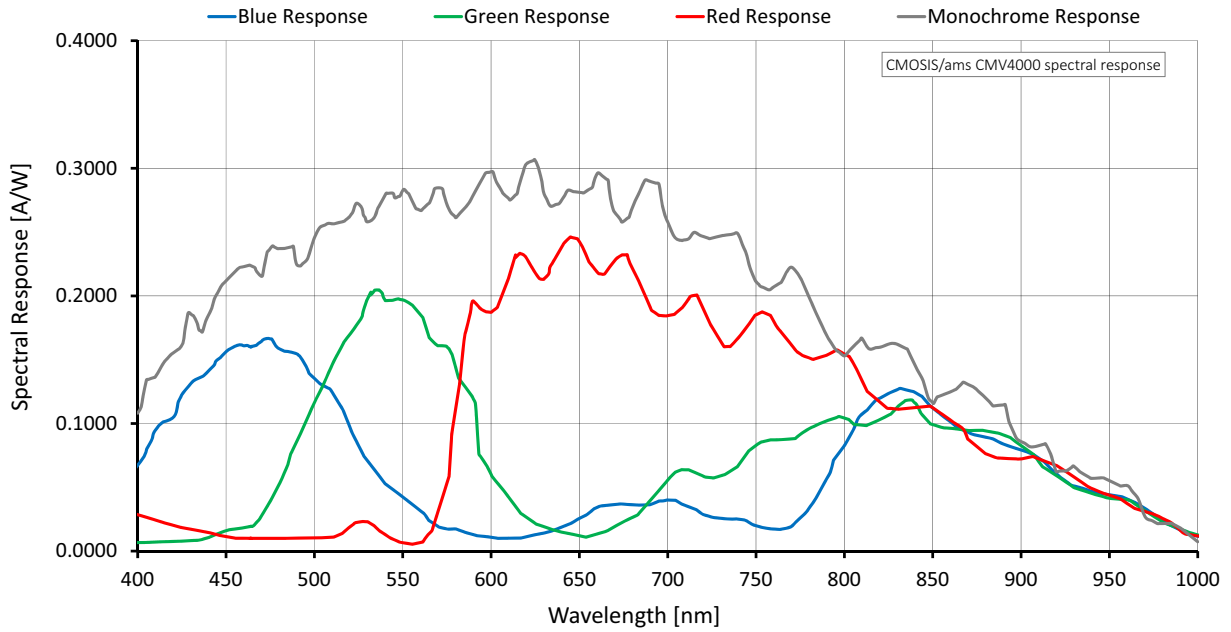


Figure 38: Mako G-419 (CMOSIS/ams CMV4000) spectral response

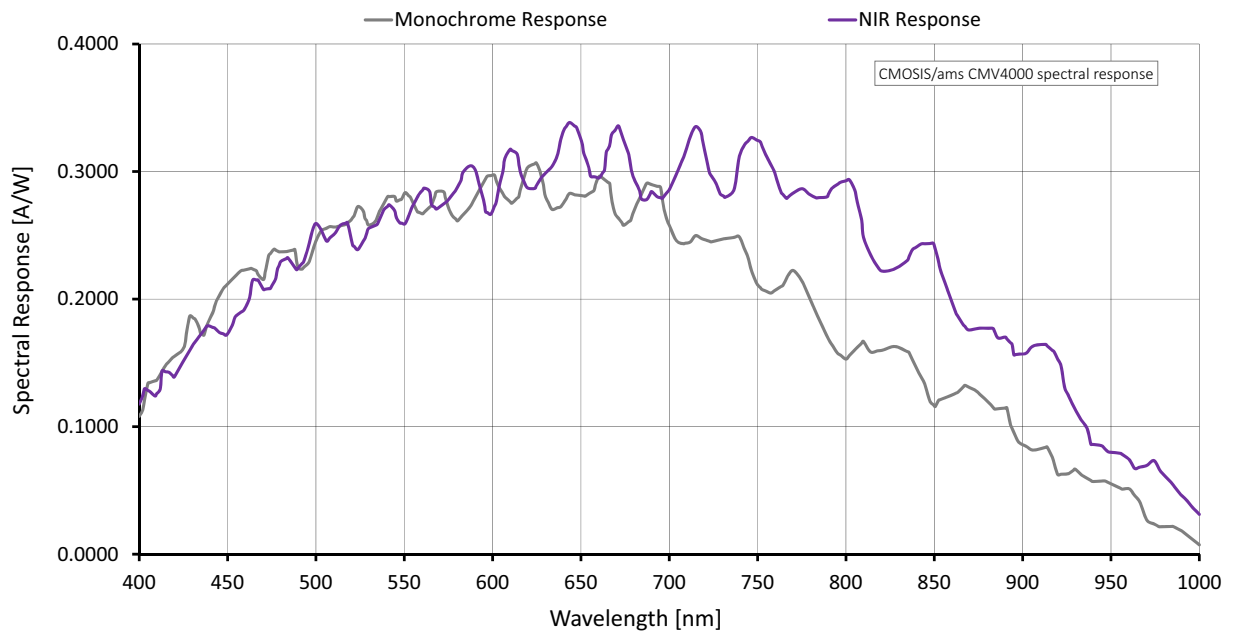


Figure 39: Mako G-419B NIR (CMOSIS/ams CMV4000) spectral response

## ROI frame rate

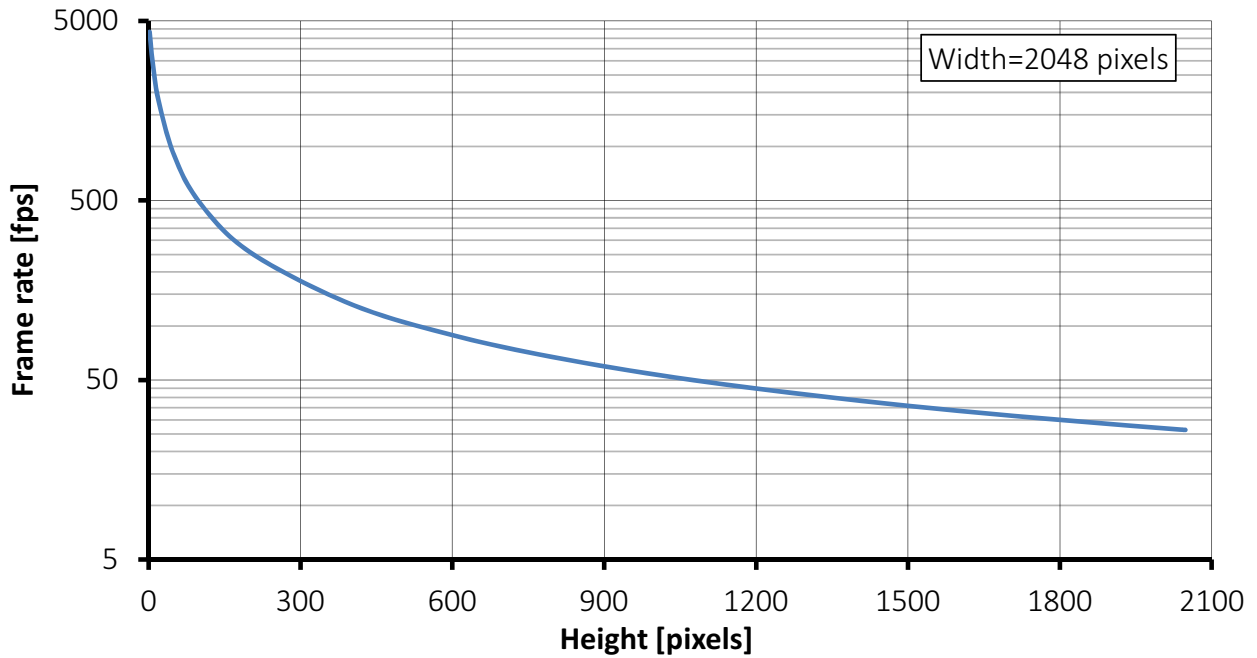


Figure 40: Mako G-419 frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
2048	26.3	400	132.1
2000	26.9	200	257.7
1800	29.9	100	490.8
1600	33.6	50	895.9
1400	38.4	20	1775.5
1200	44.8	10	2639.2
1000	53.7	5	3486.7
800	66.9	2	4342.1
600	88.8		

Table 30: Frame rate as a function of ROI height (Width=2048 pixels)



There is an increase in frame rate with reduced width if the camera is bandwidth limited.

## Mako G-503 series

The following table provides model series specifications. The values are valid for Mako G-503B and G-503C models. For specifications common to all models, see [Specifications common to all models](#).

Feature	Specification	
	Mako G-503B	Mako G-503C
Sensor model	ON Semi MT9P031	ON Semi MT9P006
Resolution (H × V)	2592 × 1944; 5.0 MP	
Sensor type	CMOS	
Shutter type	Global Reset, Rolling shutter	
Sensor format	Type 1/2.5	
Sensor size	7.13 mm diagonal	
Pixel size	2.2 μm × 2.2 μm	
Chief ray angle <sup>1</sup>	7 degrees	7 degrees, 27 degrees
Maximum frame rate at full resolution	14 fps	
Maximum image bit depth	12-bit	
Image buffer	64 MB	
StreamHoldCapacity	Up to 13 frames at full resolution	
Monochrome pixel formats	Mono8, Mono12, Mono12Packed	Mono8
YUV color pixel formats	Not applicable	YUV411Packed, YUV422Packed, YUV444Packed
RGB color pixel formats	Not applicable	RGB8Packed, BGR8Packed
RAW pixel formats	Not applicable	BayerGR8, BayerGR12Packed, BayerGR12
Exposure time control <sup>2</sup>	31 μs to 1 s; 36.4 μs increments	
Gain control	0 to 24 dB; 1 dB increments	
Binning <sup>3</sup>	Horizontal: 1 to 4 pixels; Vertical: 1 to 4 rows	
Decimation	Horizontal and Vertical: 1, 2, 4 factor	
Power consumption	2.0 W at 12 VDC; 2.2 W PoE	
Trigger latency <sup>4</sup>	Idle state: 73.4 μs; Frame valid state: 73.4 μs	
Trigger jitter <sup>4</sup>	Idle state: ±18.4 μs; Frame valid state: ±18.4 μs	

Table 31: Mako G-503 model series specifications (sheet 1 of 2)

Feature	Specification	
	Mako G-503B	Mako G-503C
Time between exposures	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8, BayerRG12Packed, YUV411Packed	451 $\mu$ s
<sup>1</sup> For more information on chief ray angle, contact Allied Vision support. <sup>2</sup> These exposure time control values are only valid with factory default settings. Exposure time control values vary depending upon pixel format and width. <sup>3</sup> Mako G-503 supports <b>BinningHorizontalMode = <i>Sum</i> or <i>Average</i></b> and <b>BinningVerticalMode = <i>Average</i></b> . <sup>4</sup> These values are calculated directly from the microcontroller source. These values are only valid for pixel formats < 16 bits per pixel and applicable in both Idle and Frame valid states: <ul style="list-style-type: none"> <li>• Idle state: sensor is ready and camera is idle, waiting for the next trigger.</li> <li>• Frame valid state: sensor is reading out and camera is busy. If next frame is requested by an external trigger in this state, higher latency may occur as compared to the Idle state.</li> </ul>		

Table 31: Mako G-503 model series specifications (sheet 2 of 2)



## Absolute QE

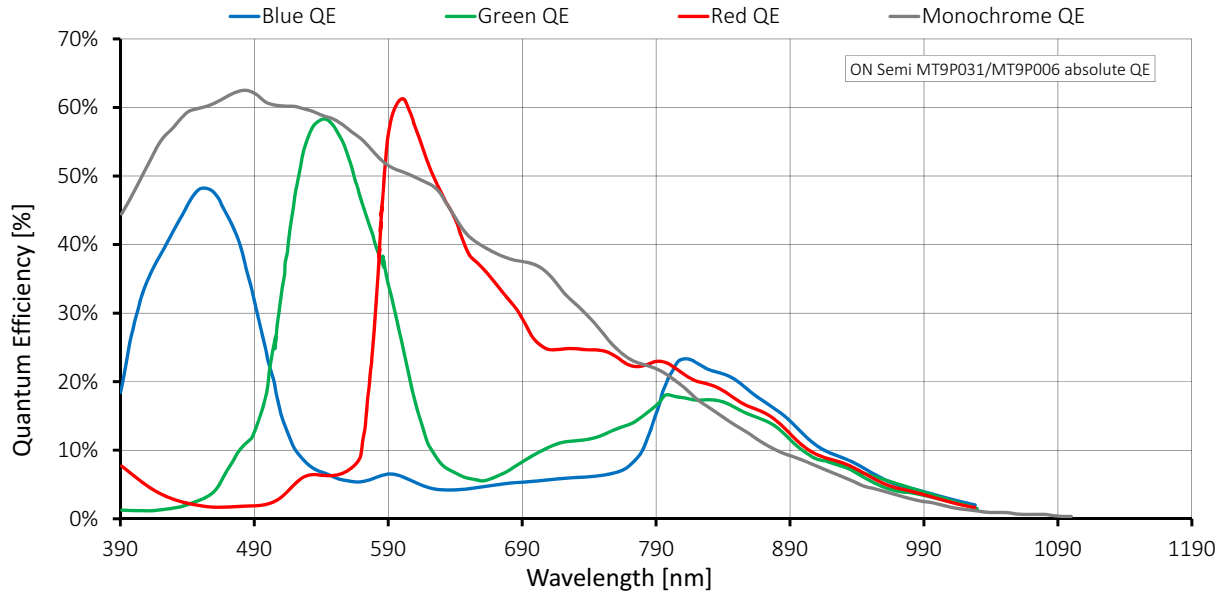


Figure 41: Mako G-503 (ON Semi MT9P031/MT9P006) absolute QE

## Spectral response

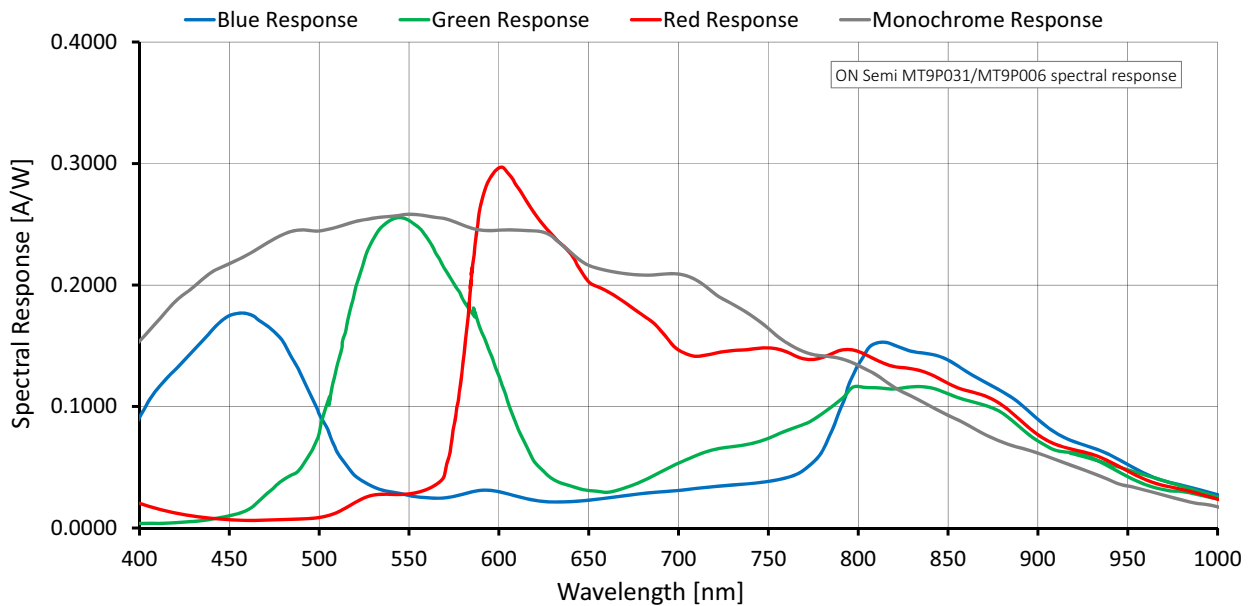


Figure 42: Mako G-503 (ON Semi MT9P031/MT9P006) spectral response

## ROI frame rate

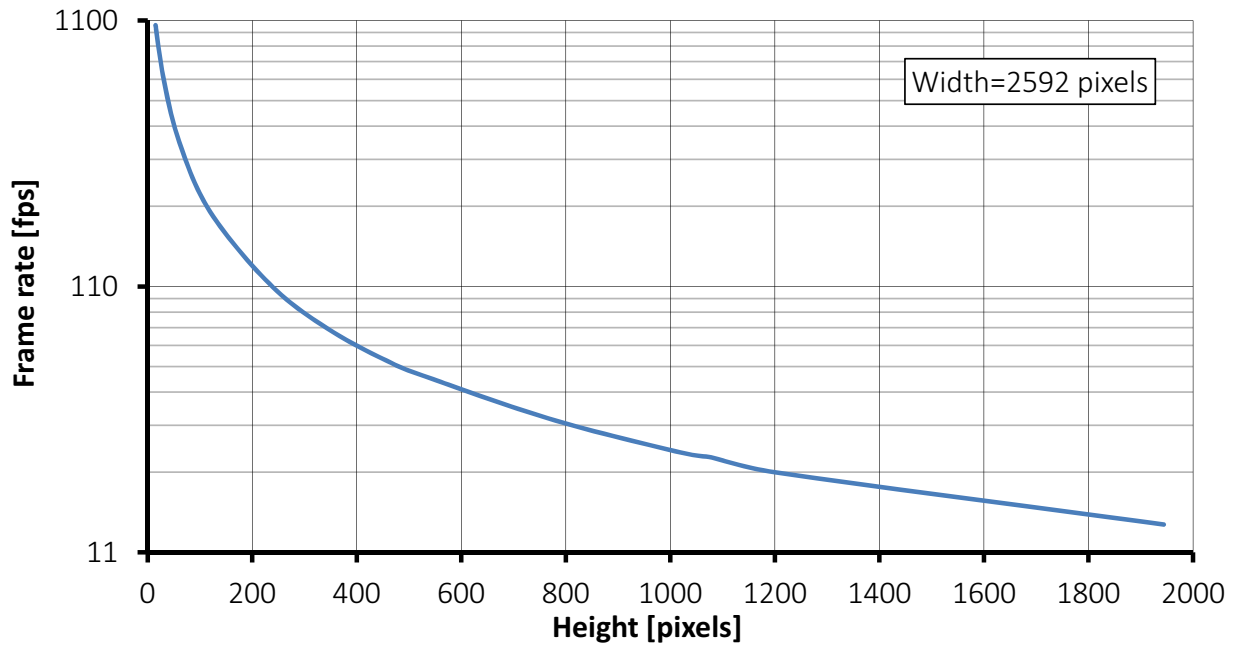


Figure 43: Mako G-503 frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
1944	14.0	360	73.0
1200	22.0	240	109.0
1080	25.0	120	209.0
1024	26.0	60	386.0
768	35.0	30	669.0
512	52.0	15	1055.0
480	55.0		

Table 32: Frame rate as a function of ROI height (Width=2592 pixels)



There is an increase in frame rate with reduced width if the camera is bandwidth limited.

# Mako G-507 series

The following table provides model series specifications. The values are valid for Mako G-507B and G-507C models. For specifications common to all models, see [Specifications common to all models](#).

Feature	Specification	
	Mako G-507B	Mako G-507C
Sensor model	Sony IMX264LLR Exmor	Sony IMX264LQR Exmor
Resolution (H × V)	2464 × 2056; 5.1 MP	
Sensor type	CMOS	
Shutter type	Pregius® global shutter	
Sensor format	Type 2/3	
Sensor size	11.1 mm diagonal	
Pixel size	3.45 μm × 3.45 μm	
Chief ray angle <sup>1</sup>	0.0 degrees	
Maximum frame rate at full resolution	23.7 fps (25.3 fps burst mode)	
Maximum image bit depth	12-bit	
Image buffer	64 MB	
StreamHoldCapacity	Up to 13 frames at full resolution	
Monochrome pixel formats	Mono8, Mono12Packed, Mono12	Mono8
YUV color pixel formats	Not applicable	YUV411Packed, YUV422Packed, YUV444Packed
RGB color pixel formats	Not applicable	RGB8Packed, BGR8Packed
RAW pixel formats	Not applicable	BayerRG8, BayerRG12, BayerRG12Packed
Exposure time control <sup>2</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	32 μs to 85.9 s; 18.88 μs increments
	Mono12, BayerRG12, YUV422Packed	38 μs to 85.9 s; 25.12 μs increments
	RGB8Packed, BGR8Packed, YUV444Packed	51 μs to 85.9 s; 37.76 μs increments
Gain control	0 to 40 dB; 0.1 dB increments	
Binning	Horizontal: 1 to 4 pixels; Vertical: 1 to 4 rows	

Table 33: Mako G-507 model series specifications (sheet 1 of 2)

Feature	Specification	
	Mako G-507B	Mako G-507C
Decimation	Horizontal and Vertical: 1, 2, 4, 8 factor	
Power consumption	2.4 W at 12 VDC; 2.8 W PoE	
Trigger latency <sup>3</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	56.64 $\mu$ s
	Mono12, BayerRG12, YUV422Packed	75.36 $\mu$ s
	RGB8Packed, BGR8Packed, YUV444Packed	113.28 $\mu$ s
Trigger jitter <sup>3</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	$\pm$ 9.44 $\mu$ s
	Mono12, BayerRG12, YUV422Packed	$\pm$ 12.56 $\mu$ s
	RGB8Packed, BGR8Packed, YUV444Packed	$\pm$ 18.88 $\mu$ s
Time between exposures	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed, BayerRG8 BayerRG12Packed, YUV411Packed	270 $\mu$ s
	Mono12, BayerRG12, YUV422Packed	363 $\mu$ s
	RGB8Packed, BGR8Packed, YUV444Packed	554 $\mu$ s


<sup>1</sup> For more information on chief ray angle, contact Allied Vision support.

<sup>2</sup> Whenever pixel format is changed, exposure adjusts itself to the nearest multiple of the exposure increment.


<sup>3</sup> These values are calculated directly from the microcontroller source. There is no differentiation between Idle and Frame valid states for this sensor.

Table 33: Mako G-507 model series specifications (sheet 2 of 2)

## Absolute QE

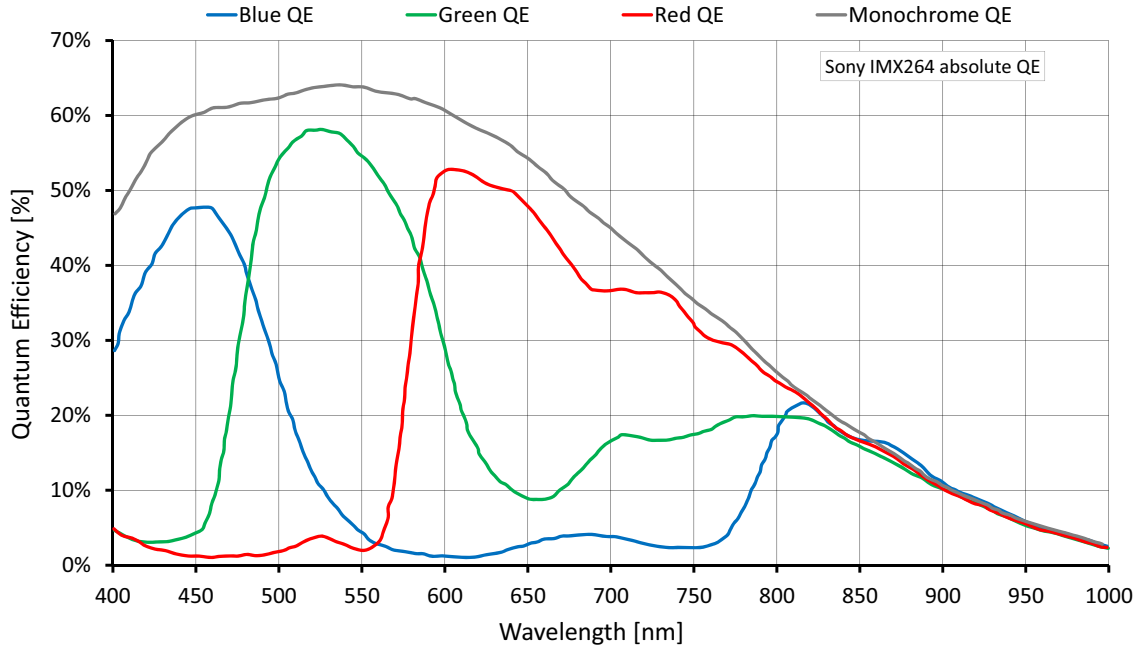

## Spectral response

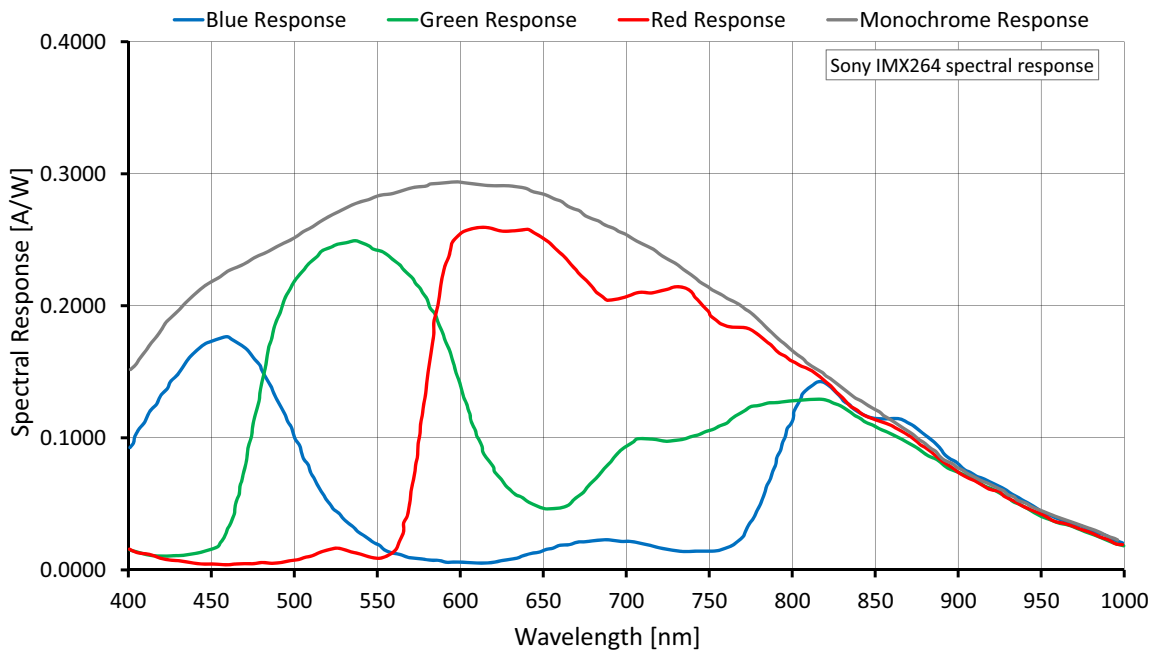

## ROI frame rate

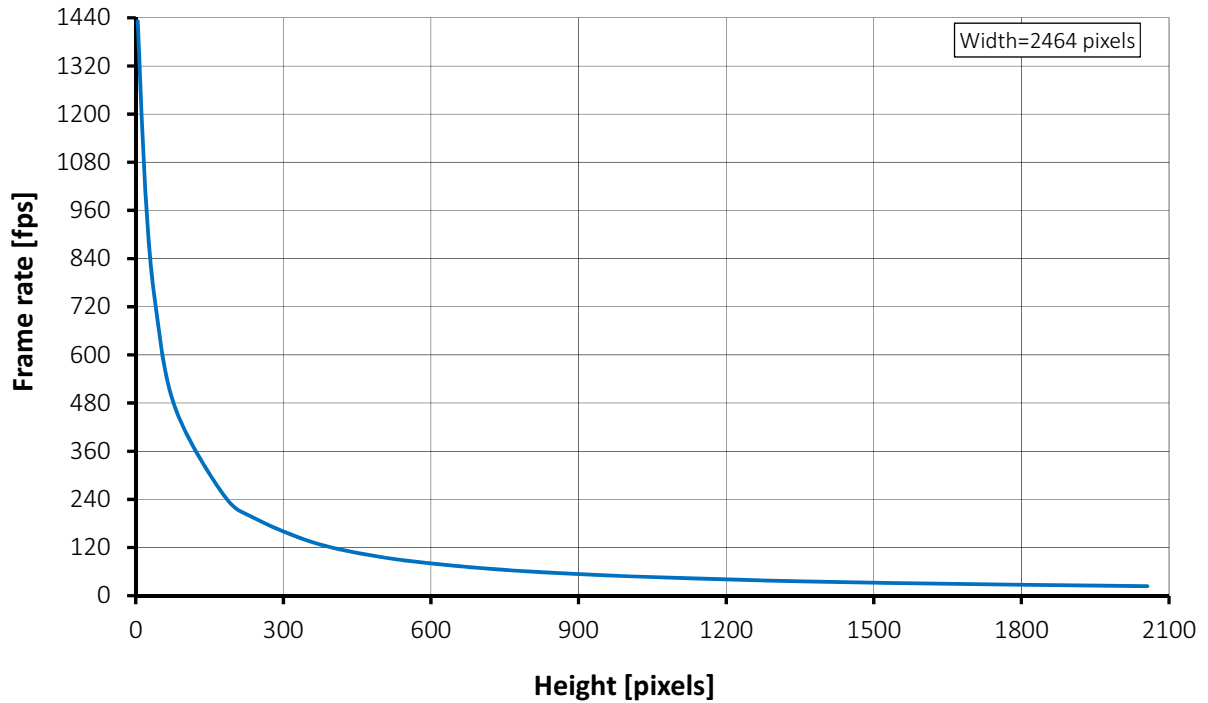


Figure 46: Mako G-507 frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
2056	23.7	480	100.3
1544	31.5	360	133.0
1324	36.8	240	194.0
1280	38.0	180	248.7
1024	47.4	80	468.7
960	50.6	40	725.5
768	62.9	20	999.3
600	80.6	4	1431.4

Table 34: Frame rate as a function of ROI height (Width=2464 pixels)



There is an increase in frame rate with reduced width if the camera is bandwidth limited. Reducing the exposure time may result in higher frame rates.

# Mako G-508B POL

The following table provides model specifications for Mako G-508B POL. For specifications common to all models, see [Specifications common to all models](#).

Feature	Specification	
Sensor model	Sony IMX250MZR Polarsens	
Resolution (H × V)	2464 × 2056; 5.0 MP	
Sensor type	CMOS	
Shutter type	Pregius® global shutter	
Sensor format	Type 2/3	
Sensor size	11.1 mm diagonal	
Pixel size	3.45 μm × 3.45 μm	
Chief ray angle <sup>1</sup>	0.0 degrees	
Maximum frame rate at full resolution	23.7 fps (25.3 fps burst mode)	
Maximum image bit depth	12-bit	
Image buffer	64 MB	
StreamHoldCapacity	Up to 13 frames at full resolution	
Monochrome pixel formats	Mono8, Mono12Packed, Mono12	
Exposure time control <sup>2</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed	32 μs to 85.9 s; 18.88 μs increments
	Mono12	38 μs to 85.9 s; 25.12 μs increments
Gain control	0 to 40 dB; 0.1 dB increments	
Binning	Horizontal: 1 to 4 pixels; Vertical: 1 to 4 rows	
Decimation	Horizontal and Vertical: 1, 2, 4, 8 factor	
Power consumption	2.4 W at 12 VDC; 2.8 W PoE	
Trigger latency <sup>3</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed	56.64 μs
	Mono12	75.36 μs
Trigger jitter <sup>3</sup>	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed	±9.44 μs
	Mono12	±12.56 μs

Table 35: Mako G-508B POL model series specifications (sheet 1 of 2)

Feature	Specification	
Time between exposures	<b>Pixel format</b>	<b>Value</b>
	Mono8, Mono12Packed	270 $\mu$ s
	Mono12	363 $\mu$ s
<sup>1</sup> For more information on chief ray angle, contact Allied Vision support. <sup>2</sup> Whenever pixel format is changed, exposure adjusts itself to the nearest multiple of the exposure increment. <sup>3</sup> These values are calculated directly from the microcontroller source. There is no differentiation between Idle and Frame valid states for this sensor.		

*Table 35: Mako G-508B POL model series specifications (sheet 2 of 2)*



## Absolute QE

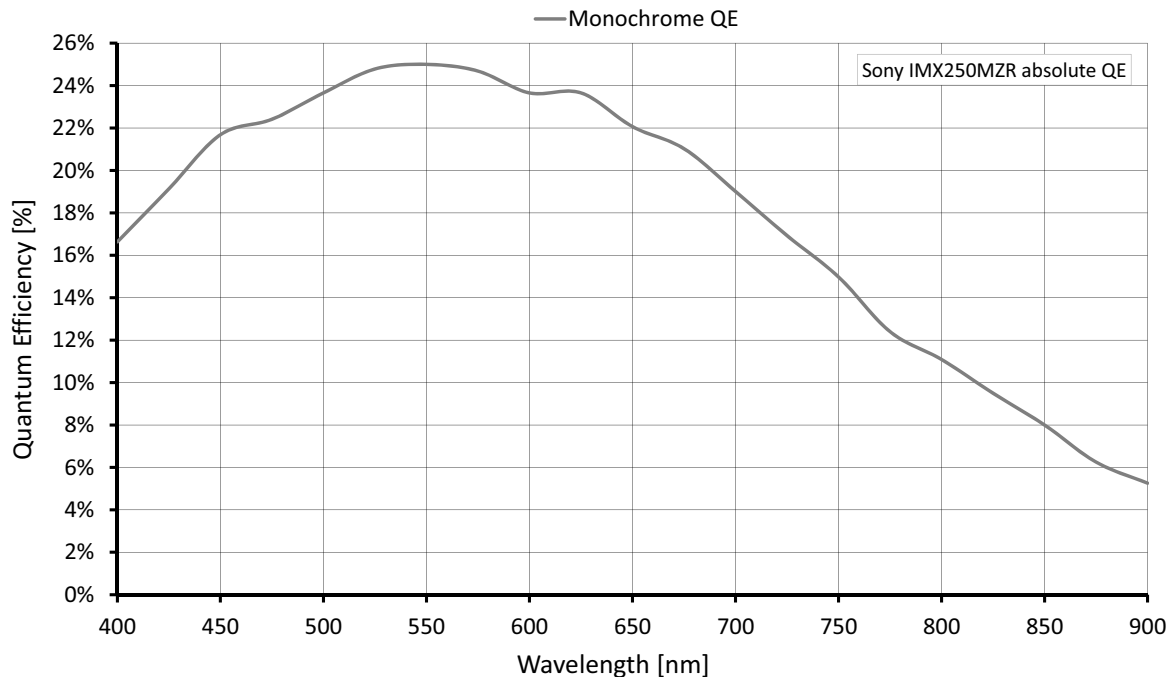


Figure 47: Mako G-508B POL (Sony IMX250MZR) absolute QE

## Spectral response

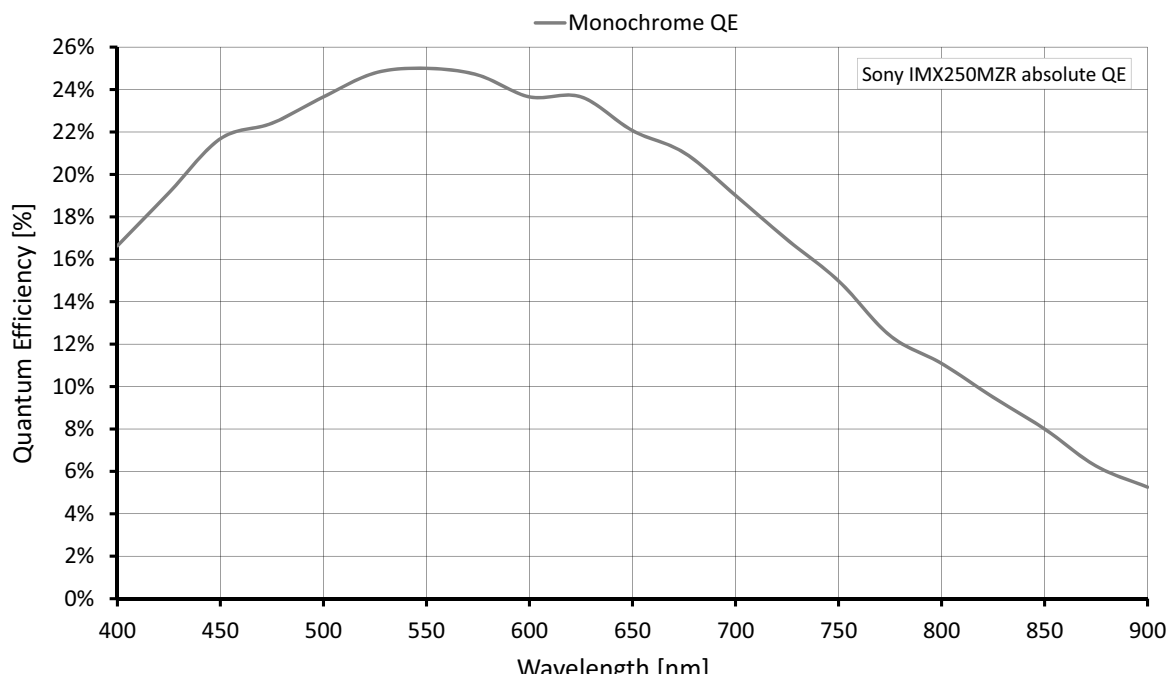


Figure 48: Mako G-508B POL (Sony IMX250MZR) spectral response

## Polarization coding diagram

The four-directional polarization of the Sony IMX250MZR sensor is arranged to get transmitted light in the layout shown in the figure below. The 90 degree signal and 45 degree signal lines, and the 135 degree signal and 0 degree signal lines are output successively.

90	45	90	45
135	0	135	0
90	45	90	45
135	0	135	0

Polarization Coding Diagram

*Figure 49: Polarization coding of physical pixel array*

## ROI frame rate

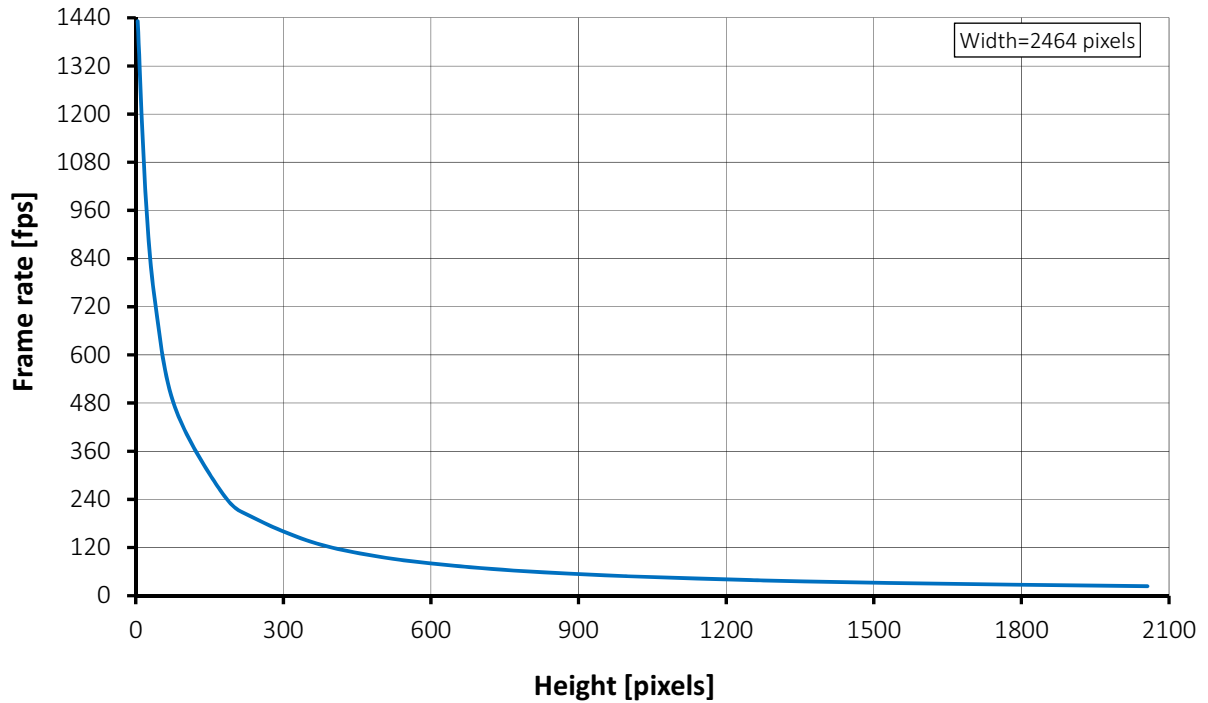


Figure 50: Mako G-508B POL frame rate as a function of ROI height

Height	Frame rate (fps)	Height	Frame rate (fps)
2056	23.7	480	100.3
1544	31.5	360	133.0
1324	36.8	240	194.0
1280	38.0	180	248.7
1024	47.4	80	468.7
960	50.6	40	725.5
768	62.9	20	999.3
600	80.6	4	1431.4

Table 36: Frame rate as a function of ROI height (Width=2464 pixels)



There is an increase in frame rate with reduced width if the camera is bandwidth limited. Reducing the exposure time may result in higher frame rates.

## Camera feature comparison

Mako G cameras support a number of standard and extended features. The following table identifies a selection of capabilities and compares the availability of features in Mako G camera models.

A complete listing of camera features, including definitions can be found on the Allied Vision Technical Documentation webpage.

- Vimba and third-party users: GigE Features Reference
- PvAPI users: GigE Camera and Driver Attributes document

	Mako G-030	Mako G-032	Mako G-040	Mako G-125	Mako G-131	Mako G-158	Mako G-192	Mako G-223	Mako G-234	Mako G-319	Mako G-419	Mako G-503	Mako G-507	Mako G-508
<b>Image optimization features</b>														
Auto gain	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Auto exposure	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Auto white balance <sup>1</sup>	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Horizontal binning		✓	✓	✓	✓	✓	✓		✓	✓		✓	✓	✓
Vertical binning		✓	✓	✓	✓	✓	✓		✓	✓ <sup>2</sup>		✓	✓ <sup>2</sup>	✓ <sup>2</sup>
Black level (offset)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Decimation	✓		✓		✓	✓	✓		✓	✓		✓	✓	✓
Defect masking	✓				✓		✓	✓			✓	✓		
Gamma correction	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Hue, saturation, color transformation <sup>1</sup>	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
One look-up table	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Region of interest	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Piecewise linear HDR mode	✓							✓			✓			
Reverse X/Y	✓		✓		✓	✓	✓		✓	✓		✓	✓	✓
Sensor shutter mode <sup>3</sup>	2	2	2	2	1	2	1	2	2	2	2	3	2	2
<sup>1</sup> Color models only														
<sup>2</sup> Monochrome models only														
<sup>3</sup> Sensor shutter mode: (1) Global, Rolling, Global Reset, (2) Global, (3) Global Reset, Rolling														

Table 37: Image optimization feature comparison by model

Camera control features	Mako G-030	Mako G-032	Mako G-040	Mako G-125	Mako G-131	Mako G-158	Mako G-192	Mako G-223	Mako G-234	Mako G-319	Mako G-419	Mako G-503	Mako G-507	Mako G-508
10/12 bit sensor output mode									✓					
Event channel	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Image chunk data	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
IEEE 1588 Precision Time Protocol	✓		✓			✓		✓	✓	✓	✓		✓	✓
Storable user sets (config files)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stream hold	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Sync out modes (Trigger ready, input, exposing, readout, imaging, strobe, GPO)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Temperature monitoring (main board only)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Trigger over Ethernet (Action Commands)	✓		✓			✓		✓	✓	✓	✓		✓	✓

Table 38: Camera control feature comparison by model



Some features are firmware dependent, refer to the GigE Firmware Release Notes for more information.

# Mechanical dimensions

## C-Mount (default)

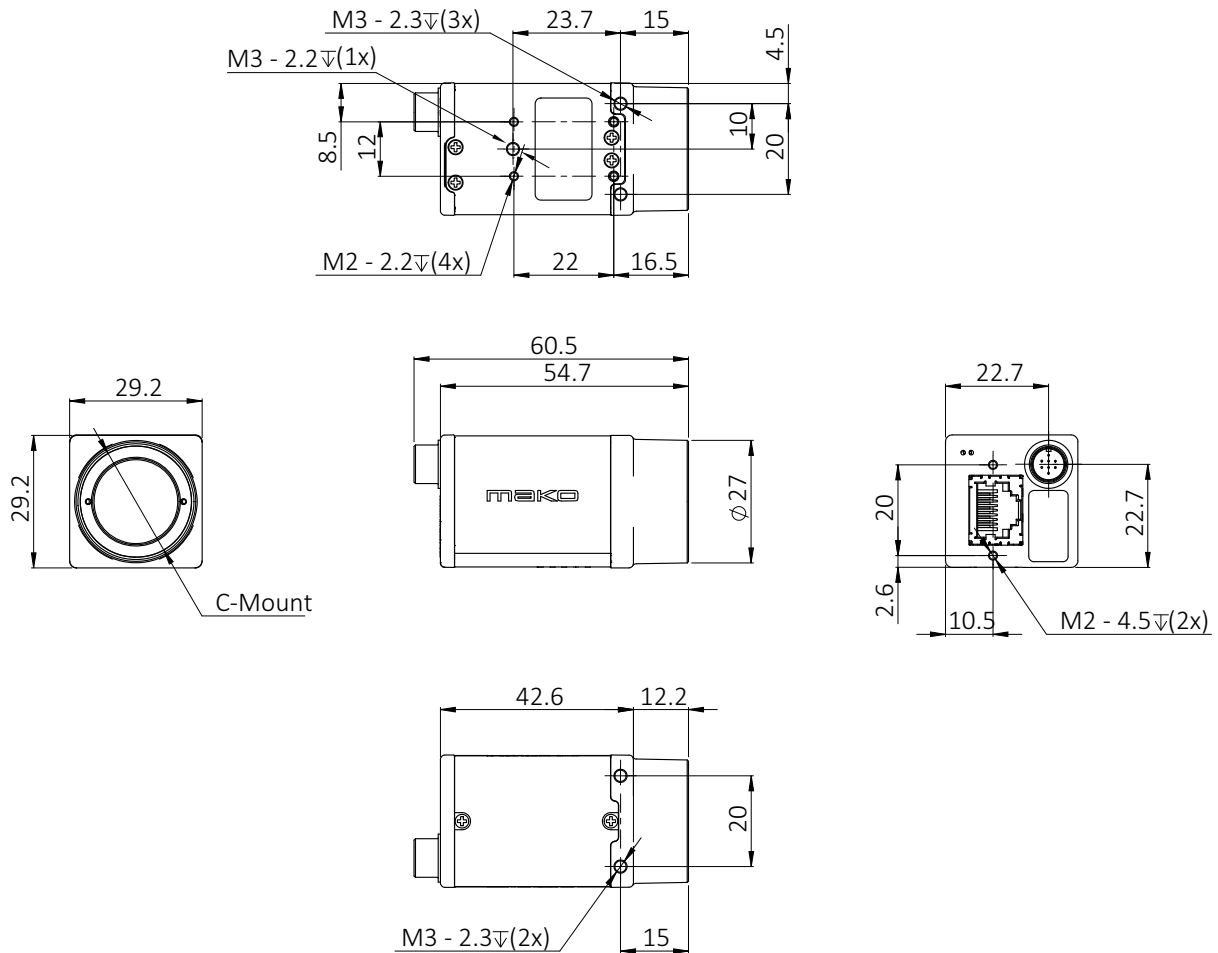


Figure 51: Mako G with C-Mount dimensions (including connectors)

## CS-Mount



Contact Allied Vision support for a technical drawing of the Mako G with a CS-Mount. A STEP files is available on the technical documentation webpage.

## M12-Mount (S-Mount)



Contact Allied Vision support for a technical drawing or STEP file of the Mako G with a M12-Mount (S-Mount).

## Tripod adapter

This tripod adapter (Allied Vision order number 4807) can be used for all Mako G cameras with the standard housing.

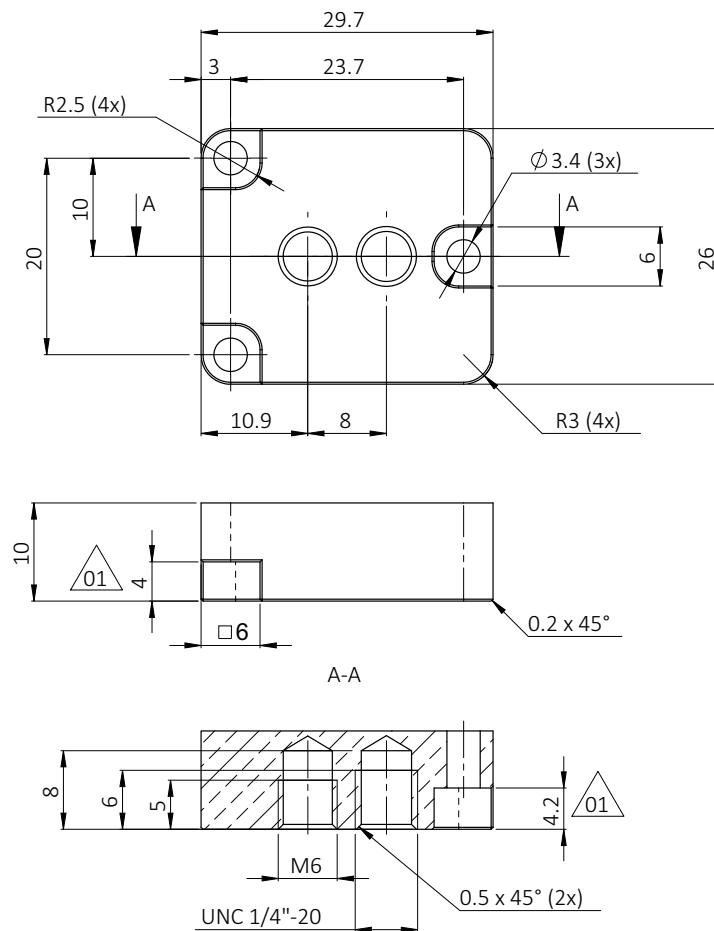


Figure 52: Tripod adapter dimensions (in mm)



### NOTICE

Avoid damage to the camera by using inappropriate accessories  
The Mako U tripod adapter is not compatible with Mako G cameras.

## Sensor position accuracy

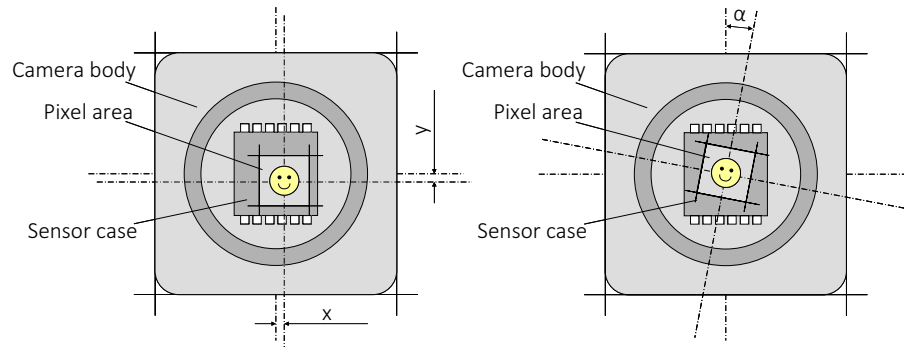


Figure 53: Sensor position accuracy

Unless stated otherwise, the following values are applicable:

Criteria	Subject	Properties
Alignment method		Optical alignment of photo sensitive sensor area into camera front module (lens mount front flange).
Reference points	Sensor	Center of pixel area (photo sensitive cells)
	Camera	Center of camera front flange (outer case edges)
Accuracy	x-axis	±150 µm (sensor shift)
	y-axis	
	z	0 µm to -150 µm (optical back focal length)
	$\alpha$	± 0.5 degrees (sensor rotation as the deviation from the parallel to the camera bottom)

Table 39: Sensor position accuracy criteria



## Lens mount cross section

All standard color Mako G cameras are equipped with a Type Hoya C-5000 IR cut filter with a 22 mm diameter. Standard monochrome and NIR Mako G cameras are not equipped with any optical filter.

We offer several optical filter options for both monochrome, near infrared, and color Mako G cameras. Choose an optical filter according to the Modular Concept.

### C-Mount with 22 mm filter (default)

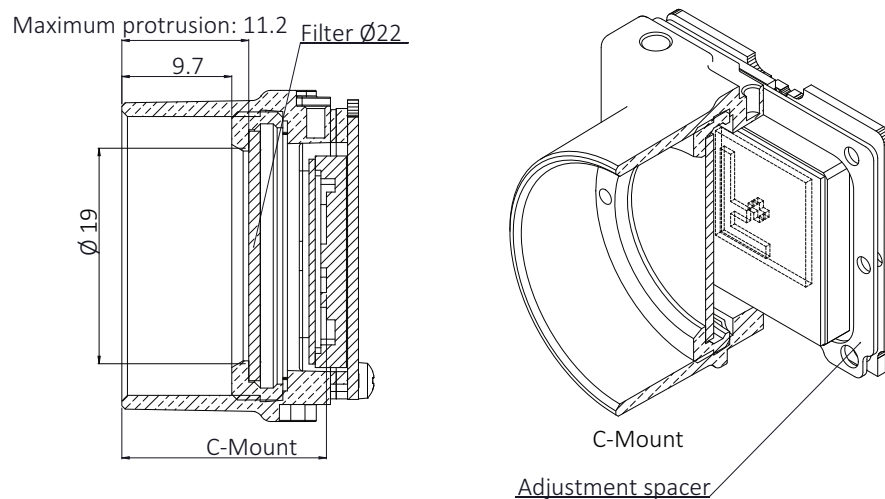


Figure 54: C-Mount with 22 mm filter



Monochrome Mako G cameras with serial number 536873083 or higher are shipped without a cover ring in the C-Mount thread. Refer to product change notice for more details.

## CS-Mount with 22 mm filter

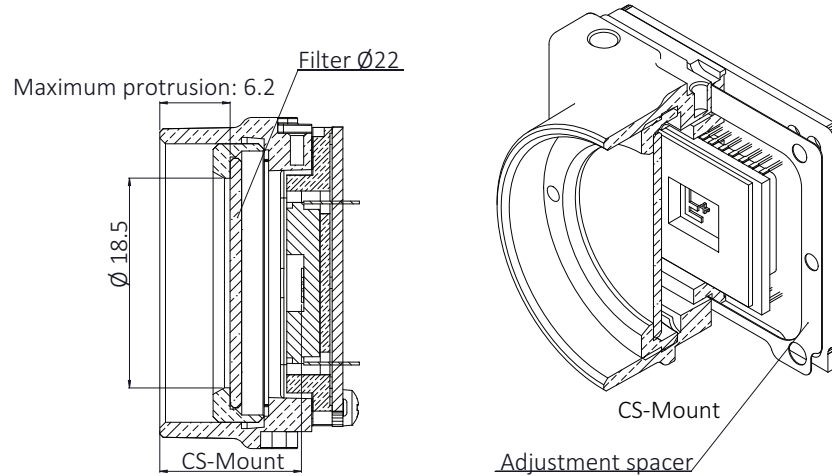


Figure 55: CS-Mount with 22 mm filter

## M12-Mount (S-Mount) with 22 mm filter



Contact Allied Vision support for an cross section technical drawing of the Mako G with a M12-Mount (S-Mount) and 22 mm filter.

## C-Mount with 16 mm filter

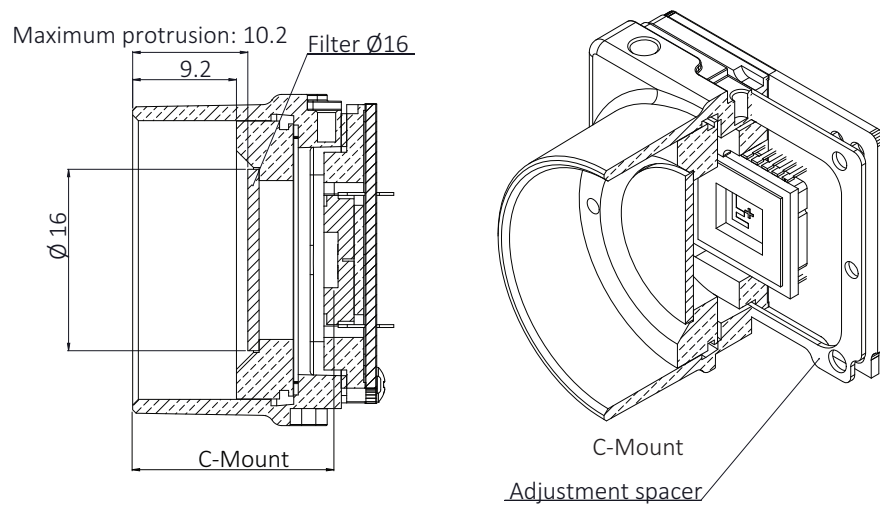


Figure 56: C-Mount with 16 mm filter

## CS-Mount with 16 mm filter

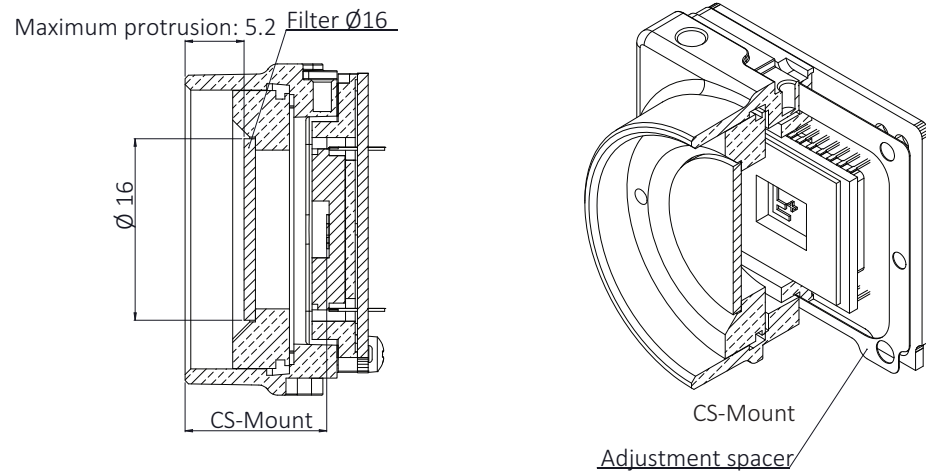


Figure 57: CS-Mount with 16 mm filter

## M12-Mount (S-Mount) with 16 mm filter



Contact Allied Vision support for an cross section technical drawing of the Mako G with an M12-Mount (S-Mount) and 16 mm filter.

## Dimensional adjustment

The dimensional adjustment cannot be done by the customer. All modifications have to be done by Allied Vision. If you need any mount related adjustments, contact Allied Vision.

# Filter and lenses




This chapter includes information on:

- Suitable lens formats for Mako G camera models
- Standard IR cut filter and its transmission characteristics

## Camera lenses

We offer different lenses from a variety of manufacturers. This section presents tables that list selected image field of view (width × height) depending on sensor size, distance and focal length of the lens.

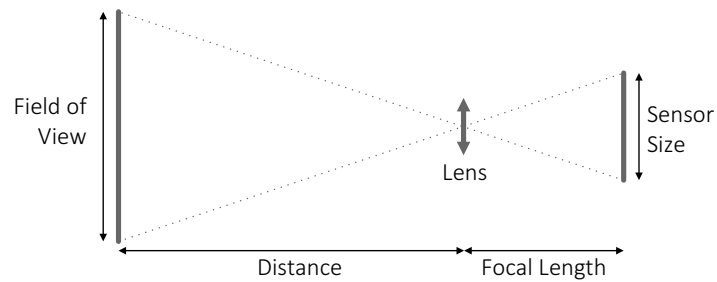

Lenses with focal lengths < 8 mm may show shading in the edges of the image due to microlenses on the sensor. The exact values vary and depend on the respective lens.

### Mako G-030 series

The following table provides the field of view for various focal lengths. The values are valid for Mako G-030B and G-030C models.

Focal length	Field of view	
	Distance = 500 mm	Distance = 1000 mm
4.8 mm	495 × 371 mm	995 × 746 mm
8 mm	295 × 221 mm	595 × 446 mm
12.5 mm	187 × 140 mm	379 × 284 mm
16 mm	145 × 109 mm	295 × 221 mm
25 mm	91 × 68 mm	187 × 140 mm
50 mm	43 × 32 mm	91 × 68 mm

Table 40: Mako G-030 series focal length versus field of view

## Mako G-032 series

The following table provides the field of view for various focal lengths. The values are valid for Mako G-032B and G-032C models.

Focal length	Field of view	
	Distance = 500 mm	Distance = 1000 mm
4.0 mm	608 × 446 mm	1220 × 896 mm
4.8 mm	506 × 371 mm	1016 × 746 mm
8 mm	301 × 221 mm	608 × 446 mm
12 mm	199 × 146 mm	403 × 296 mm
16 mm	148 × 109 mm	301 × 221 mm
25 mm	93 × 68 mm	191 × 140 mm
35 mm	65 × 48 mm	135 × 99 mm

Table 41: Mako G-032 series focal length versus field of view

## Mako G-040 series

The following table provides the field of view for various focal lengths. The values are valid for Mako G-040B and G-040C models.

Focal length	Field of view	
	Distance = 500 mm	Distance = 1000 mm
2.8 mm	888 × 666 mm	1781 × 1336 mm
4 mm	620 × 465 mm	1245 × 934 mm
4.2 mm	590 × 443 mm	1185 × 889 mm
4.8 mm	516 × 387 mm	1037 × 778 mm
6 mm	412 × 309 mm	828 × 621 mm
6.5 mm	380 × 285 mm	764 × 573 mm
8 mm	308 × 231 mm	620 × 465 mm
12 mm	203 × 153 mm	412 × 309 mm
16 mm	151 × 113 mm	308 × 231 mm
25 mm	95 × 71 mm	195 × 146 mm

Table 42: Mako G-040 series focal length versus field of view

## Mako G-131 series

The following table provides the field of view for various focal lengths. The values are valid for Mako G-131B and G-131C models.

Focal length	Field of view	
	Distance = 500 mm	Distance = 1000 mm
4.5 mm	760 × 606 mm	1526 × 1217 mm
6 mm	568 × 453 mm	1143 × 911 mm
10 mm	338 × 270 mm	683 × 545 mm
17 mm	196 × 156 mm	399 × 318 mm
25 mm	131 × 105 mm	269 × 215 mm
35 mm	92 × 73 mm	190 × 152 mm

Table 43: Mako G-131 series focal length versus field of view

## Mako G-158 series

The following table provides the field of view for various focal lengths. The values are valid for Mako G-158B and G-158C models.

Focal length	Field of view	
	Distance = 500 mm	Distance = 1000 mm
2.8 mm	888 × 666 mm	1781 × 1336 mm
4 mm	620 × 465 mm	1245 × 934 mm
4.2 mm	590 × 443 mm	1185 × 889 mm
4.8 mm	516 × 387 mm	1037 × 778 mm
6 mm	412 × 309 mm	828 × 621 mm
6.5 mm	380 × 285 mm	764 × 573 mm
8 mm	308 × 231 mm	620 × 465 mm
12 mm	203 × 153 mm	412 × 309 mm
16 mm	151 × 113 mm	308 × 231 mm
25 mm	95 × 71 mm	195 × 146 mm

Table 44: Mako G-158 series focal length versus field of view

## Mako G-192 series

The following table provides the field of view for various focal lengths. The values are valid for Mako G-192B and G-192C models.

Focal length	Field of view	
	Distance = 500 mm	Distance = 1000 mm
4.5 mm	793 × 595 mm	1593 × 1195 mm
6 mm	593 × 445 mm	1193 × 895 mm
10 mm	353 × 265 mm	713 × 535 mm
17 mm	205 × 153 mm	416 × 312 mm
25 mm	137 × 103 mm	281 × 211 mm
35 mm	96 × 72 mm	199 × 149 mm

Table 45: Mako G-192 series focal length versus field of view

## Mako G-223 series

The following table provides the field of view for various focal lengths. The values are valid for Mako G-223B, G-223B NIR, and G-232C models.

Focal length <sup>1</sup>	Field of view	
	Distance = 500 mm	Distance = 1000 mm
4.8 mm	1162 × 617 mm	2335 × 1240 mm
6 mm	927 × 492 mm	1865 × 991 mm
6.5 mm	855 × 454 mm	1721 × 914 mm
8 mm	692 × 368 mm	1396 × 742 mm
10 mm	552 × 293 mm	1114 × 597 mm
12 mm	458 × 243 mm	927 × 492 mm
16 mm	341 × 181 mm	692 × 369 mm
25 mm	214 × 114 mm	439 × 223 mm
35 mm	150 × 79 mm	310 × 165 mm
50 mm	101 × 54 mm	214 × 114 mm
75 mm	64 × 34 mm	139 × 74 mm
90 mm	51 × 27 mm	114 × 60 mm

<sup>1</sup> A 2/3 inch lens may cause vignetting (1 inch lens recommended)

Table 46: Mako G-223 series focal length versus field of view



## Mako G-234 series

The following table provides the field of view for various focal lengths. The values are valid for Mako G-234B and G-234C models.

Focal length	Field of view	
	Distance = 500 mm	Distance = 1000 mm
12 mm	461 × 290 mm	933 × 586 mm
16 mm	343 × 215 mm	697 × 438 mm
25 mm	215 × 135 mm	442 × 278 mm
35 mm	150 × 94 mm	312 × 196 mm
50 mm	102 × 64 mm	215 × 135 mm

Table 47: Mako G-234 series focal length versus field of view

## Mako G-319 series

The following table provides the field of view for various focal lengths. The values are valid for Mako G-319B and G-319C models.

Focal length	Field of view	
	Distance = 500 mm	Distance = 1000 mm
5 mm	705 × 525 mm	1417 × 1055 mm
6 mm	586 × 436 mm	1180 × 878 mm
8 mm	438 × 326 mm	883 × 657 mm
10 mm	349 × 260 mm	705 × 525 mm
12 mm	290 × 216 mm	586 × 436 mm
16 mm	215 × 160 mm	438 × 326 mm
25 mm	135 × 101 mm	278 × 207 mm
35 mm	95 × 70 mm	196 × 146 mm
50 mm	64 × 48 mm	135 × 101 mm
75 mm	40 × 30 mm	88 × 65 mm

Table 48: Mako G-319 series focal length versus field of view

## Mako G-419 series

The following table provides the field of view for various focal lengths. The values are valid for Mako G-419B, G-419B NIR, and G-419C models.

Focal length	Field of view	
	Distance = 500 mm	Distance = 1000 mm
8 mm	692 × 692 mm	1396 × 1396 mm
10 mm	552 × 552 mm	1114 × 1114 mm
12 mm	458 × 458 mm	928 × 928 mm
16 mm	340 × 340 mm	692 × 692 mm
25 mm	214 × 214 mm	439 × 439 mm
35 mm	150 × 150 mm	310 × 310 mm
50 mm	101 × 101 mm	214 × 214 mm
75 mm	64 × 64 mm	139 × 139 mm
90 mm	51 × 51 mm	104 × 104 mm

Table 49: Mako G-419 series focal length versus field of view

## Mako G-503 series

The following table provides the field of view for various focal lengths. The values are valid for Mako G-503B and G-503C models.

Focal length	Field of view	
	Distance = 500 mm	Distance = 1000 mm
4.8 mm	588 × 442 mm	1182 × 887 mm
8 mm	351 × 263 mm	707 × 531 mm
12 mm	232 × 174 mm	469 × 352 mm
16 mm	172 × 129 mm	351 × 263 mm
25 mm	108 × 81 mm	222 × 167 mm
35 mm	76 × 57 mm	157 × 118 mm

Figure 58: Mako G-503 series focal length versus field of view

## Mako G-507 series

The following table provides the field of view for various focal lengths. The values are valid for Mako G-507B and G-507C models.

Focal length	Field of view	
	Distance = 500 mm	Distance = 1000 mm
5 mm	842 × 703 mm	1692 × 1413 mm
8 mm	526 × 437 mm	1054 × 880 mm
10 mm	417 × 348 mm	842 × 703 mm
12 mm	346 × 289 mm	700 × 585 mm
16 mm	257 × 215 mm	523 × 437 mm
25 mm	162 × 135 mm	332 × 277 mm
35 mm	113 × 94 mm	234 × 196 mm
50 mm	77 × 64 mm	162 × 135 mm
75 mm	48 × 40 mm	105 × 88 mm

Figure 59: Mako G-507 series focal length versus field of view

## Mako G-508B POL

The following table provides the field of view for various focal lengths. The values are valid for Mako G-508B POL models.

Focal length	Field of view	
	Distance = 500 mm	Distance = 1000 mm
5 mm	842 × 703 mm	1692 × 1413 mm
8 mm	526 × 437 mm	1054 × 880 mm
10 mm	417 × 348 mm	842 × 703 mm
12 mm	346 × 289 mm	700 × 585 mm
16 mm	257 × 215 mm	523 × 437 mm
25 mm	162 × 135 mm	332 × 277 mm
35 mm	113 × 94 mm	234 × 196 mm
50 mm	77 × 64 mm	162 × 135 mm
75 mm	48 × 40 mm	105 × 88 mm

Figure 60: Mako G-508B POL focal length versus field of view

# Optical filters

All color Mako G cameras are equipped with a Type Hoya C-5000 IR cut filter. This filter is employed to prevent infrared light from passing to the sensor. In the absence of an IR cut filter, images are dominated by red and incapable of being properly color balanced.

All monochrome and NIR Mako G cameras do not employ an IR cut filter or protection glass.

The following plot shows the filter transmission response for the available filters and protection glass.


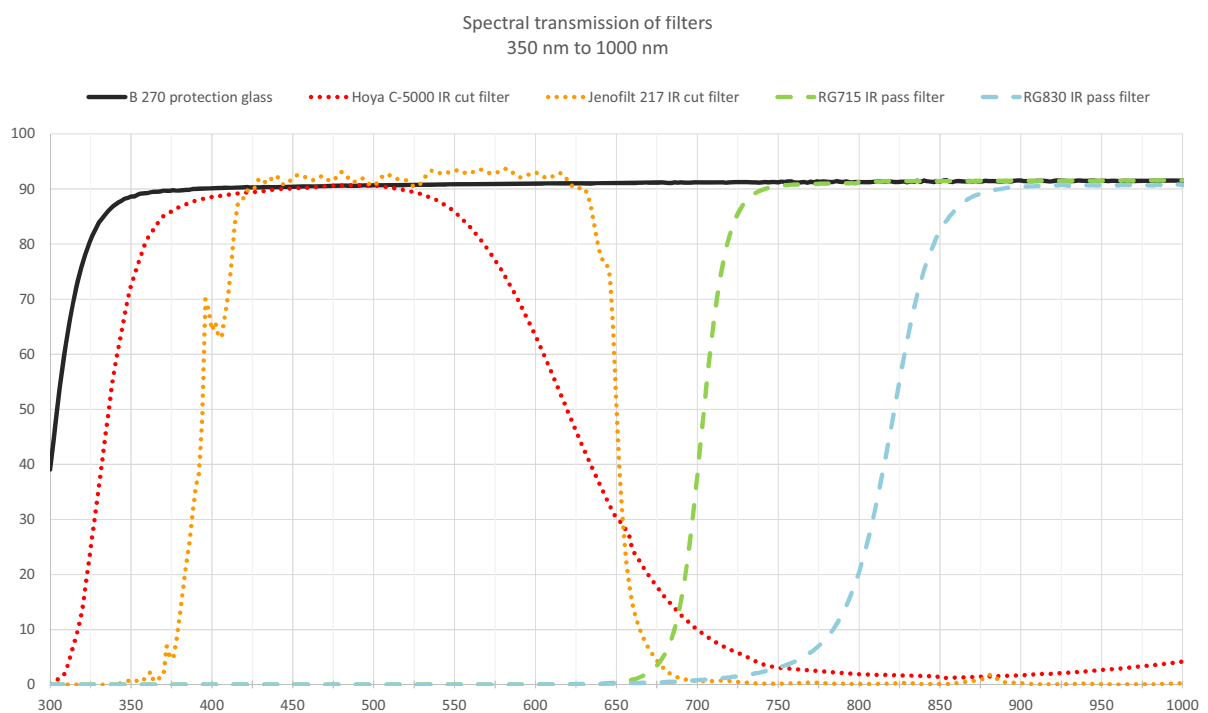


Figure 61: Optical filter spectral transmission

# Camera interfaces



This chapter includes:

- A general description of the inputs and outputs (including trigger features)
- I/O connector pin assignments
- I/O block diagrams
- A general description of trigger rules including a timing diagram and definitions

## Back panel

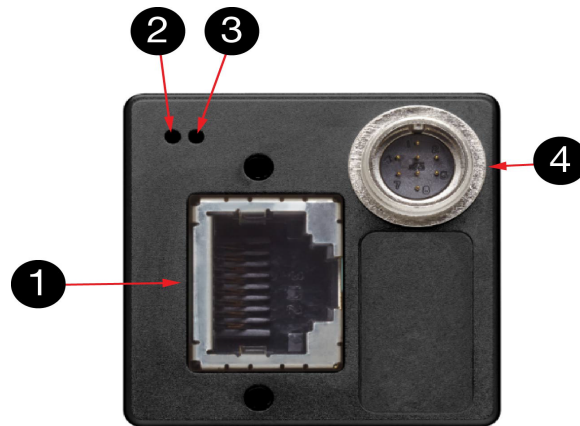


Figure 62: Rear view of Mako G cameras

<b>1</b>	Gigabit Ethernet port
<b>2</b>	LED 1 (orange)
<b>3</b>	LED 2 (green)
<b>4</b>	Hirose I/O port

Table 50: Ports and LEDs

## Status LEDs

The following tables describe the Mako G status LEDs.

LED 1 color	Status
Solid orange	Ethernet link established
Flashing orange	Network traffic

Table 51: Status LED 1

LED 2 color	Status
Solid green	Camera powered

Table 52: Status LED 2 (sheet 1 of 2)

LED 2 color	Status
Slow flashing green	Booting routine
Four rapid flashes per second	Transmission error Contact <a href="mailto:support@alliedvision.com">support@alliedvision.com</a>

Table 52: Status LED 2 (sheet 2 of 2)

## Gigabit Ethernet port

The Gigabit Ethernet port conforms to the IEEE 802.3 1000BASE-T standard for Gigabit Ethernet over copper. To prevent EMI and for best performance, Category 6 (or higher) cables with S/STP shielding and connectors are recommended. Applications with longer cable lengths or harsh EMI conditions require Category 7 (or higher) cables.



- Cable lengths up to 100 meters are supported.
- The 8-pin RJ-45 jack provides a pin assignment according to the Ethernet standard, IEEE 802.3 1000BASE-T.
- All Mako G cameras are PoE capable (IEEE 802.3at Type 1).
- If both the Hirose I/O port and Gigabit Ethernet port (via PoE) are used for power, the camera only uses the power from the Hirose I/O port.

## Camera I/O connections

The general purpose I/O port uses a Hirose HR25-7TR-8PA(73) connector on the camera side. The mating cable connector is Hirose HR25-7TP-8S.



A 12 V power adapter with Hirose connector is available for purchase from Allied Vision:

- Order code: 13868 (Desktop power supply without connection cable)
- Order code: 13866 (AC power cable, 1.8 m, US to C13)
- Order code: 13865 (AC power cable, 1.8 m, EU to C13)



The camera is not intended to be connected to a DC distribution network. The maximum length for I/O cables must not exceed 30 meters.




### Safety-related instructions to avoid malfunctions

Read all Notes and Cautions in the Hardware and Installation chapter before using the Hirose I/O connector.


**Hirose connector**

The cable side Hirose connector is available for purchase from Allied Vision (order code K7600503).

## I/O connector pin assignment



Camera side Hirose HR25-7TR-8PA(73) connector					I/O cable color code
Pin	Signal	Direction	Level	Description	
1	Out 1	Out	Open emitter, maximum 20 mA	Opto-isolated output 1	Yellow dot Red
2	Out 2	Out	Open emitter, maximum 20 mA	Opto-isolated output 2	Yellow dot Black
3	Out 3	Out	Open emitter, maximum 20 mA	Opto-isolated output 3	Gray dot Red
4	In 1	In	$U_{in}(\text{high}) = 3.0 \text{ to } 24.0 \text{ V}$ up to 36 V with external resistor of 3.3 k $\Omega$ in series $U_{in}(\text{low}) = 0 \text{ to } 1.0 \text{ V}$	Opto-isolated input 1	Gray dot Black
5	Isolated In GND	In	---	Isolated input signal ground	Pink dot Black
6	Isolated Out Power	In	Common VCC for outputs maximum 30 VDC	Power input for opto- isolated outputs	Pink dot Red
7	Camera Power	In	12 to 24 VDC $\pm 10\%$	Camera power supply	Orange dot Black
8	Camera GND	In	Ground for external power	Ground for camera power supply	Orange dot Red

Table 53: Camera I/O connector pin assignment and I/O cable color coding





For cable color and pin out information, see the Allied Vision I/O cable data sheet:  
[www.alliedvision.com/en/support/technical-documentation/accessories-data-sheets](http://www.alliedvision.com/en/support/technical-documentation/accessories-data-sheets)

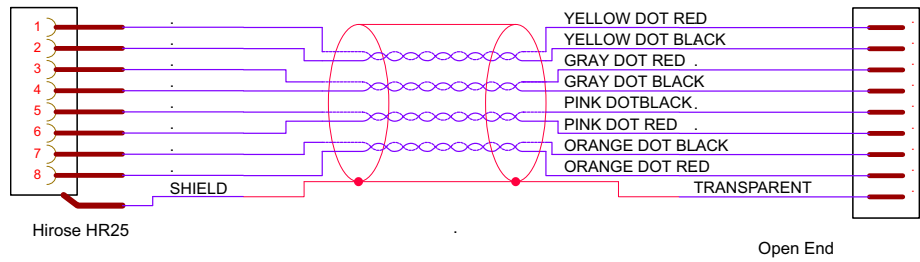


Figure 63: Mako G cable color coding

## Input block diagram

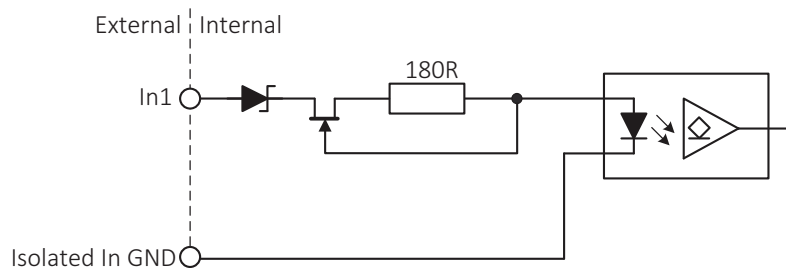


Figure 64: Input block diagram

The input can be connected directly to the system for voltages up to 24 VDC. An external resistor is not necessary.

## Cycle delay

Parameter	Value
$U_{in}$ (low)	0 to 1.0 V
$U_{in}$ (high)	3 to 24 V
Current (constant-current source)	3 to 4 mA

Table 54: Input parameters

## Minimum pulse width

The minimum pulse width for all Mako G cameras is:




Figure 65: Minimum pulse width

## Test conditions

The input signal was driven with 3.3 Volts and no external additional series resistor.

## Output block diagram

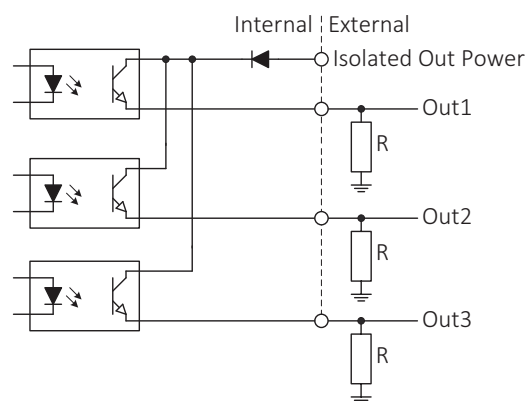


Figure 66: Output block diagram


**NOTICE**

Output and isolated out power:

- Maximum 20 mA per output
- Isolated out power > 30 V may damage the camera

Isolated Out Power	Resistor value <sup>1</sup>	
5 V	1.0 kΩ	at ~ 5 mA minimum required current draw
12 V	2.4 kΩ	
24 V	4.7 kΩ	


<sup>1</sup> Resistor required if Out1, Out2, Out3 connected to a device with < 5 mA draw, that is, high impedance

Table 55: Isolated Out Power and external resistor

## Output switching times

Optocoupler input (internal)

Optocoupler output (external)

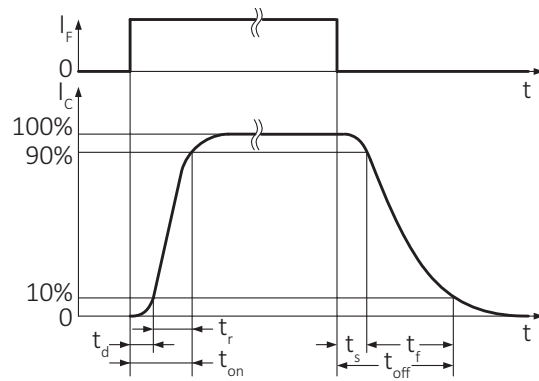

$t_d$  delay time                       $t_s$  storage time  
 $t_r$  rise time                           $t_f$  fall time  
 $t_{on} (= t_d + t_r)$  turn-on time       $t_{off} (= t_s + t_f)$  turn-off time

Figure 67: Output switching times

Parameter and value	
$t_d \approx 1 \mu\text{s}$	$t_s \approx 26 \mu\text{s}$
$t_r \approx 1 \mu\text{s}$	$t_f \approx 21 \mu\text{s}$
$t_{on} = t_d + t_r \approx 2 \mu\text{s}$	$t_{off} = t_s + t_f \approx 47 \mu\text{s}$ ( $t_{off}$ can deviate by $\pm 5 \mu\text{s}$ )

Table 56: Parameters

### Test conditions

Output: external 2.4 kΩ resistor to ground, Isolated Out Power set to 12 Volts.



- Higher external values increase the times.
- It is recommended to trigger on the rising edge. This guarantees the fastest possible reaction time.

## Control signals

The inputs and outputs of the camera can be configured by software. The different modes are described in this section. All input and output signals that pass the I/O connector are controlled by the I/O strobe commands.

### Input block diagram

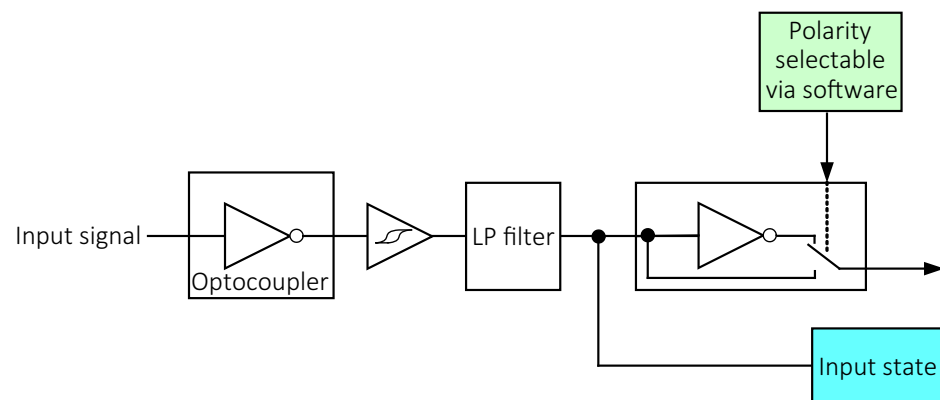


Figure 68: Input block diagram

### Output signals

Output signals are configured by software. Any signal can be placed on any output. The main output signals are described in the following table.

Signal	Description
GPO	Configured to be a general purpose output, control is assigned to <code>SyncOutGpoLevel1s</code> .
AcquisitionTriggerReady	Active after the camera has been recognized by the host computer and is ready to start acquisition.

Table 57: Output signals (sheet 1 of 2)

Signal	Description
FrameTriggerReady	Active when the camera is in a state that accepts the next frame trigger.
FrameTrigger	Active when an image has been initiated to start. This is a logic trigger internal to the camera, which is initiated by an external trigger or software trigger event.
Exposing	Active for the duration of sensor exposure.
FrameReadout	Active during frame readout, that is, the transferring of image data from the sensor to the camera memory.
Imaging	Imaging is high when the camera image sensor is either exposing or reading out data.
Acquiring	Active during an acquisition stream.
SyncIn1	Active when there is an external trigger at <i>SyncIn1</i> .
Strobe1	The output signal is controlled according to <i>Strobe1</i> settings.

Table 57: Output signals (sheet 2 of 2)

## Output block diagram

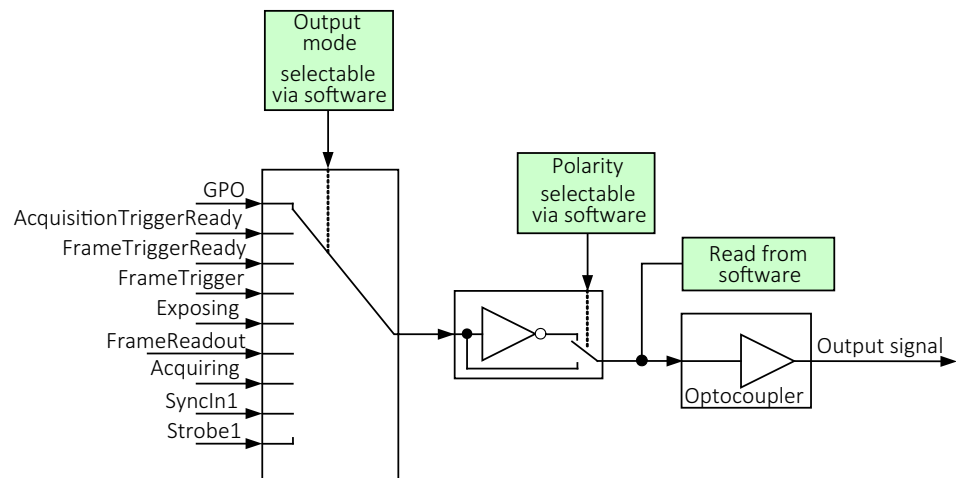


Figure 69: Output block diagram

# Camera trigger

For trigger description on camera control basis, see the GigE Features Reference.

## Trigger timing diagram

The following diagram explains the general trigger concept for CCD-sensor models.

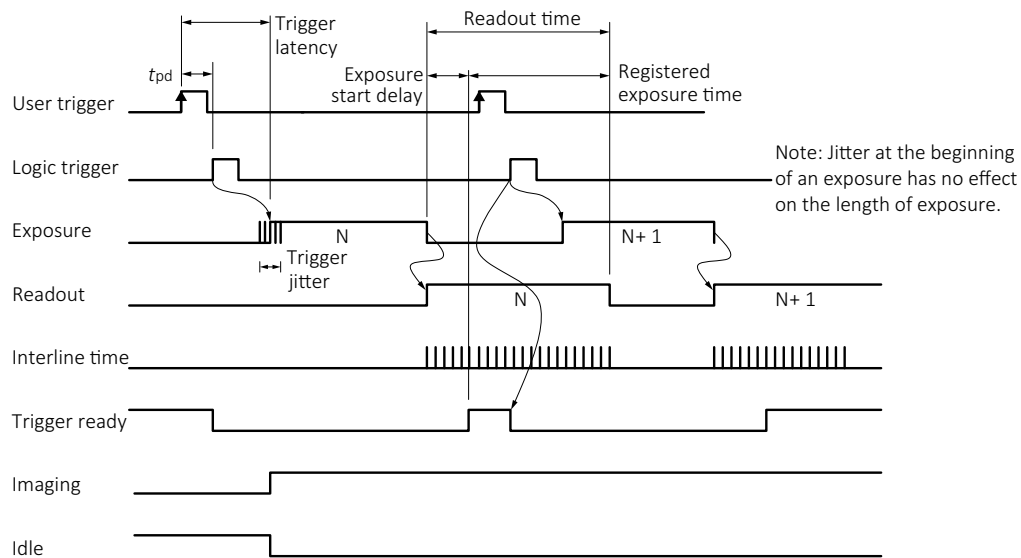


Figure 70: Internal signal timing waveforms (CCD-sensor models)

The following diagram explains the general trigger concept for CMOS-sensor models.

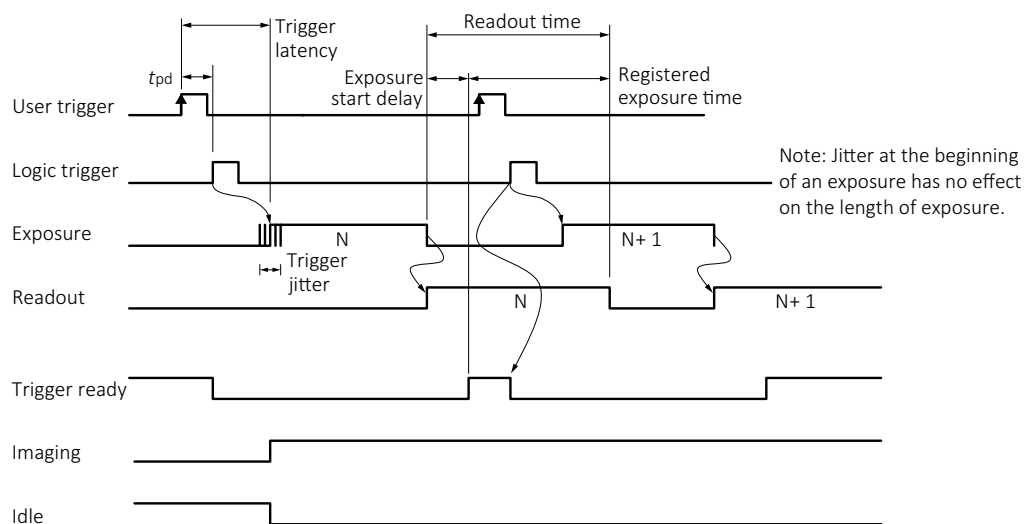


Figure 71: Internal signal timing waveforms (CMOS-sensor models)

## Trigger definitions

Term	Definition
User trigger	Trigger signal applied by the user (hardware trigger, software trigger)
Logic trigger	Trigger signal seen by the camera internal logic (not visible to the user)
Propagation delay ( $t_{pd}$ )	Propagation delay between the user trigger and the logic trigger
Exposure	High when the camera image sensor is integrating light
Readout	High when the camera image sensor is reading out data
Trigger latency	Time delay between user trigger and start of exposure
Trigger jitter	Error in the trigger latency time
Trigger ready	Indicates that the camera can accept the next trigger
Registered exposure time	Exposure time value currently stored in the camera memory
Exposure start delay	Registered exposure time subtracted from the readout time and indicates when the next exposure cycle can begin such that the exposure ends after the current readout
Interline time	Time between sensor row readout cycles (CCD models only)
Imaging	High when the camera image sensor is either exposing or reading out data
Idle	High if the camera image sensor is not exposing or reading out data

Table 58: Trigger definitions

## Trigger rules



### Overlapping exposure and readout (Mako G-131 and G-192)

The Teledyne e2v sensor does not support overlapped exposure and readout in hardware trigger mode or in global reset mode.

- The user trigger pulse width should be at least 6  $\mu$ s.
- The end of exposure always triggers the next readout.
- The end of exposure must always end after the current readout.
- The start of exposure must always correspond with the interline time if readout is true.
- Exposure start delay equals the readout time minus the registered exposure time.

## Triggering during the idle state

For applications requiring the shortest possible trigger latency and the smallest possible trigger jitter, the user trigger signal should be applied when imaging is false and idle is true.

## Triggering during the readout state

For applications requiring the fastest triggering cycle time whereby the camera image sensor is exposing and reading out simultaneously, the user trigger signal should be applied as soon as a valid trigger ready is detected.

In this case, trigger latency and trigger jitter can be up to one line time since exposure must always begin on an Interline boundary.




For a more detailed description of the trigger concept for advanced users and special scenarios, see the Triggering Concept application note:

[www.alliedvision.com/en/support/technical-papers-knowledge-base](http://www.alliedvision.com/en/support/technical-papers-knowledge-base)



# Image data flow



This chapter presents diagrams that illustrate data flow and bit resolution of the image data.

A complete listing of camera features, including definitions can be found on the Allied Vision Technical Documentation webpage.

- Vimba and third-party users: GigE Features Reference
- PvAPI users: GigE Camera and Driver Attributes document

## Mako G model series with CCD sensors

### Mako G-032 and G-125 series

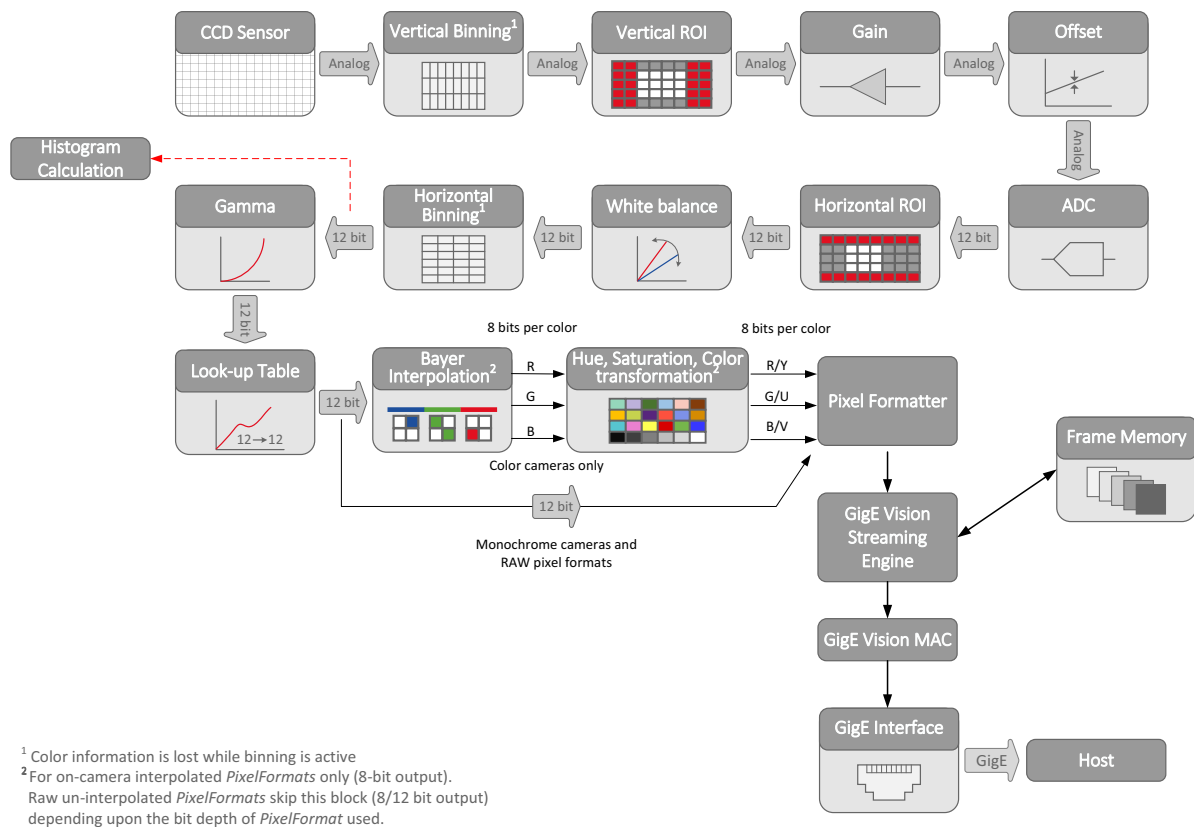


Figure 72: Mako G-032 and G-125 series image data flow

# Mako G model series with CMOS sensors

## Mako G-030 series

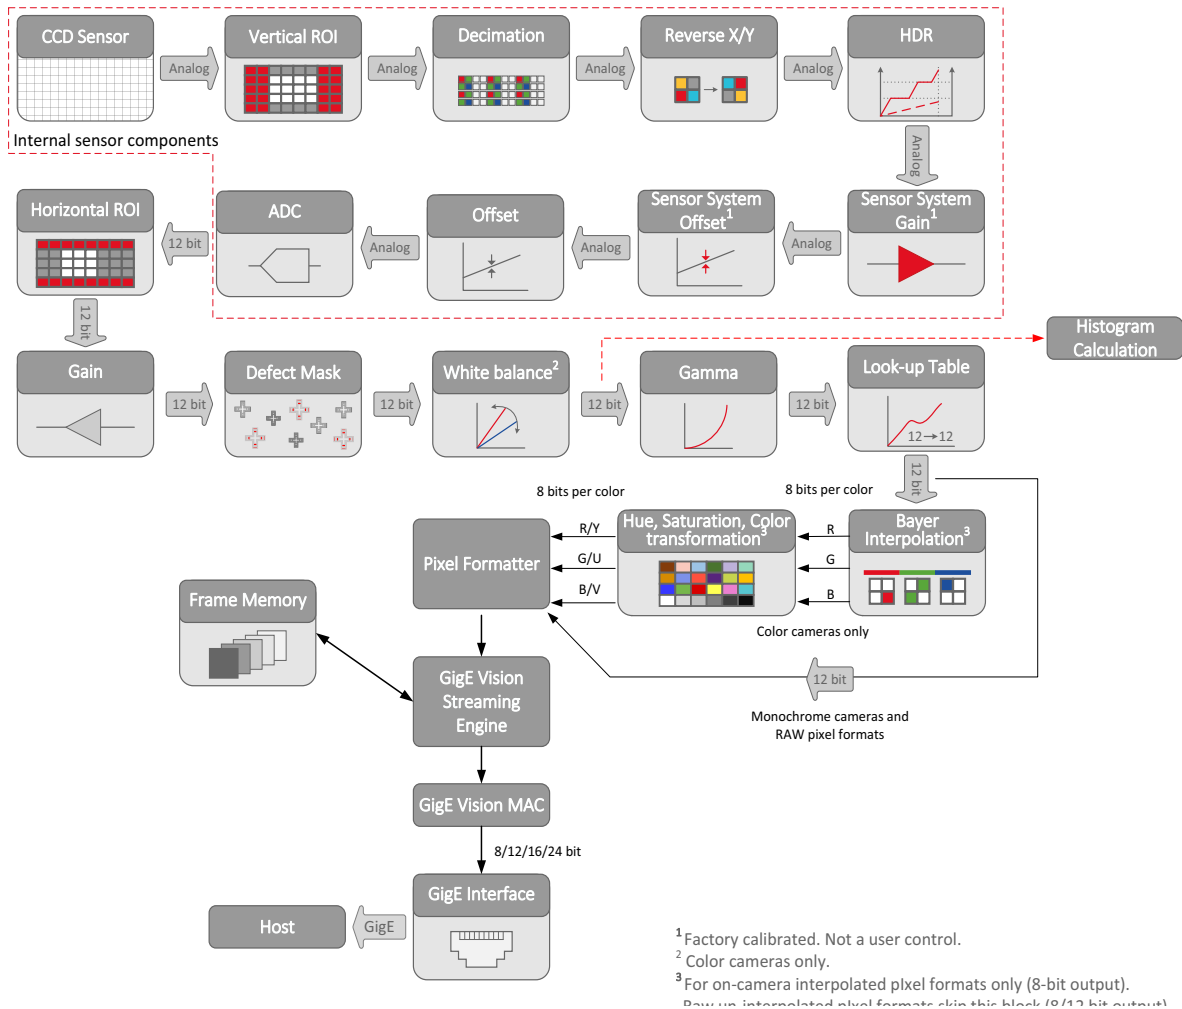


Figure 73: Mako G-030 series image data flow

## Mako G-131 and G-192 series

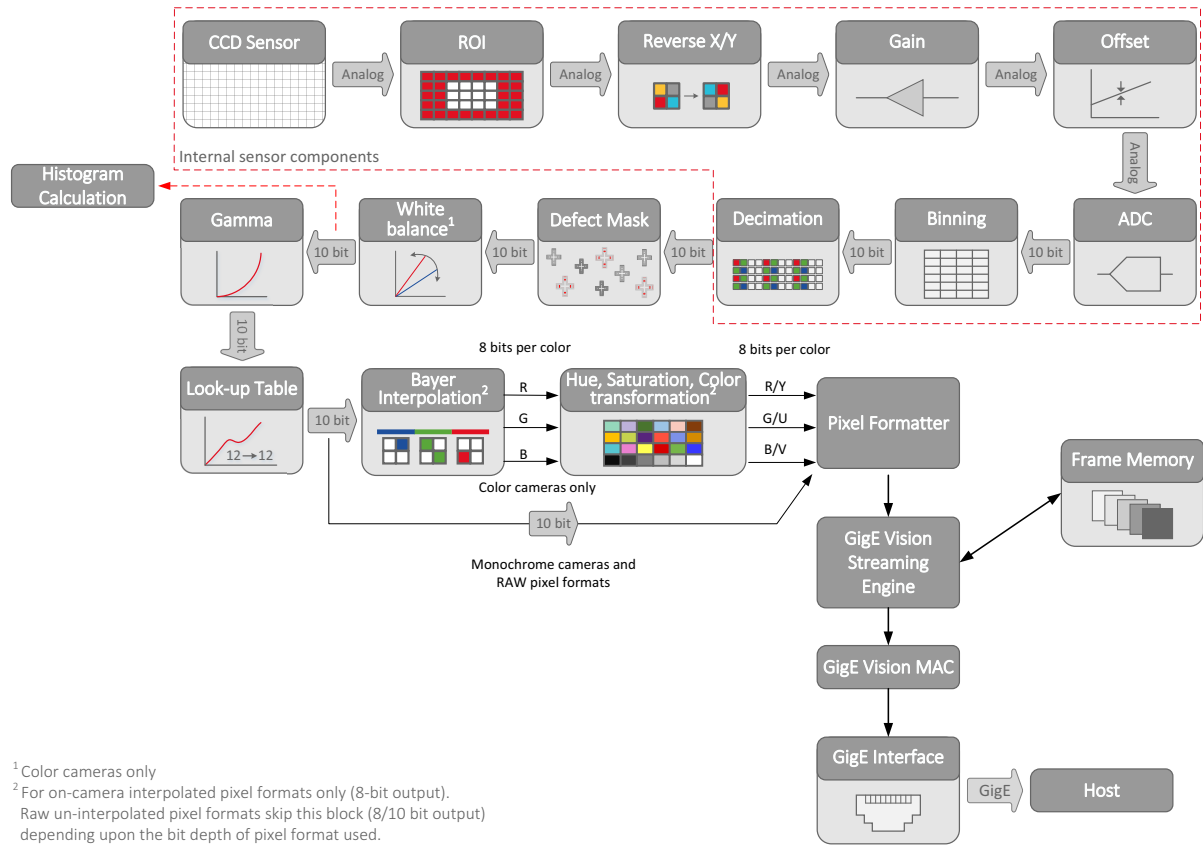


Figure 74: Mako G-131 and G-192 series image data flow

## Mako G-223 and G-419 series

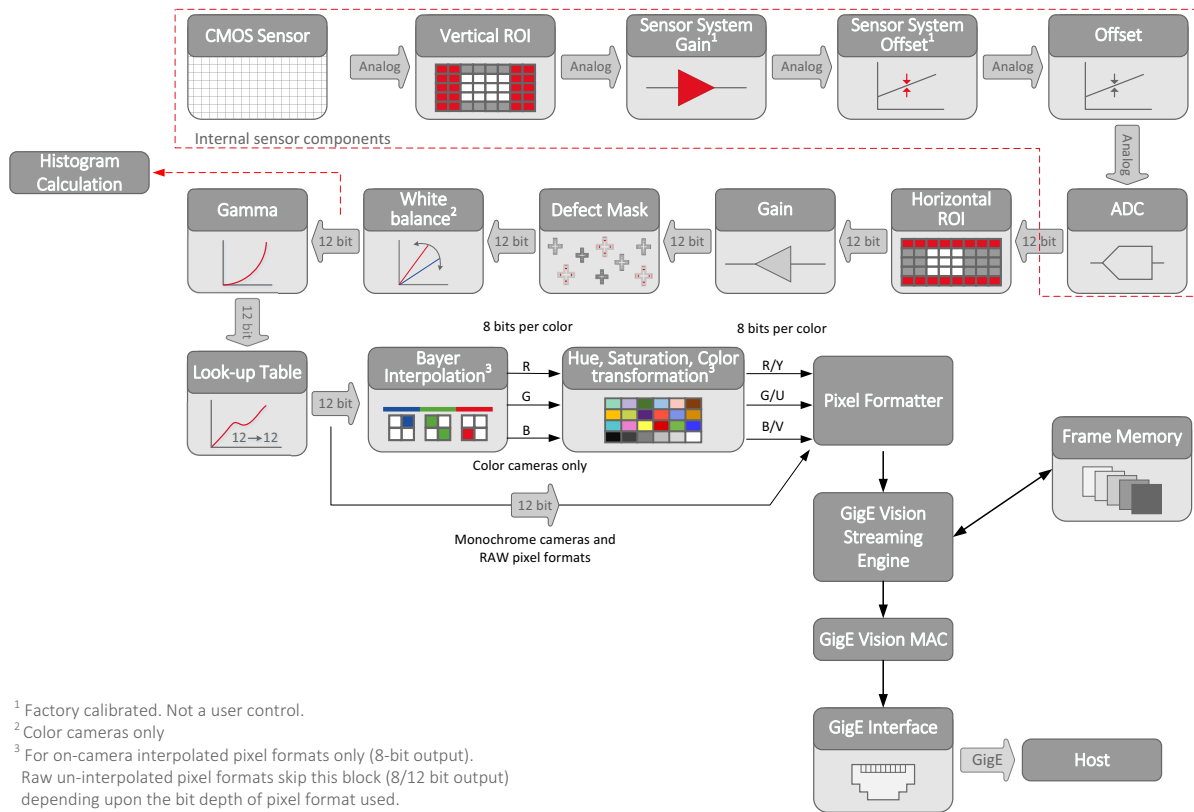


Figure 75: Mako G-223 and G-419 series image data flow

## Mako G-040, G-158, G-234, G-319, G-507 series and G-508B POL

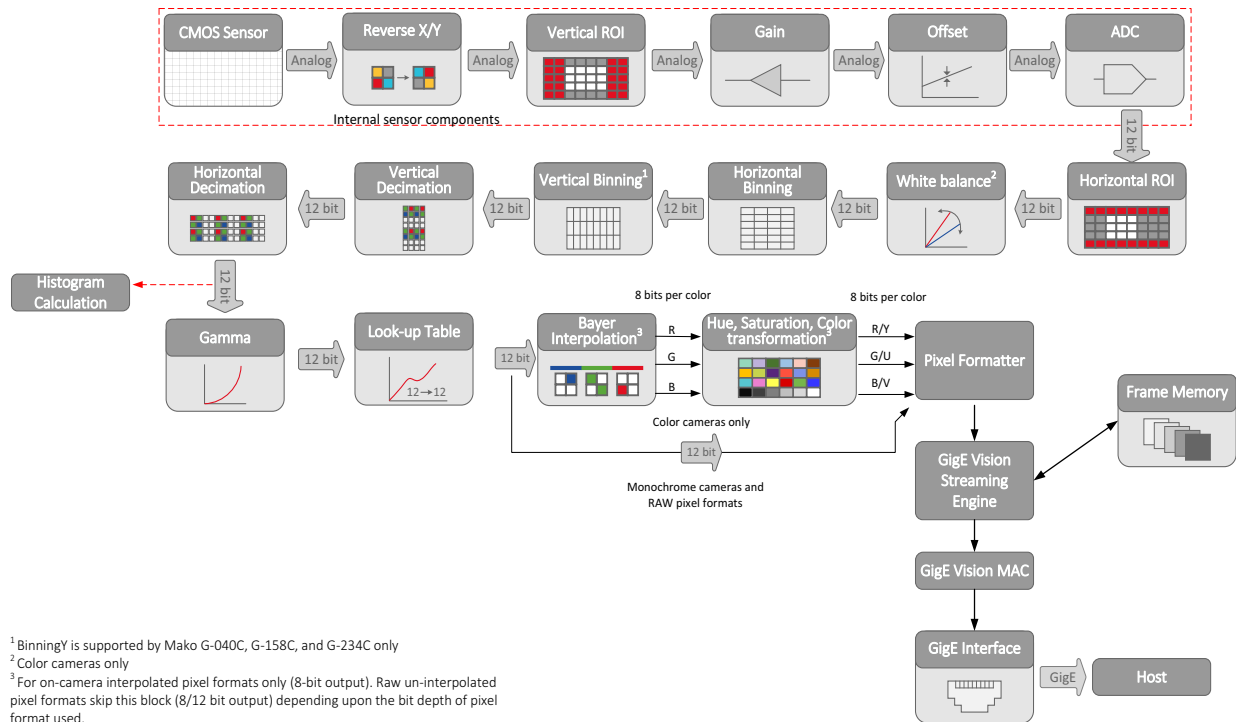


Figure 76: Mako G-040, G-158, G-234, G-319, G-507 series and G-508B POL image data flow



Mako G-234B, G-234C supports 10-bit and 12-bit sensor readout mode. 10-bit data is processed as 12-bit data with 2 LSB bits padded with zeros.

## Mako G-503 series

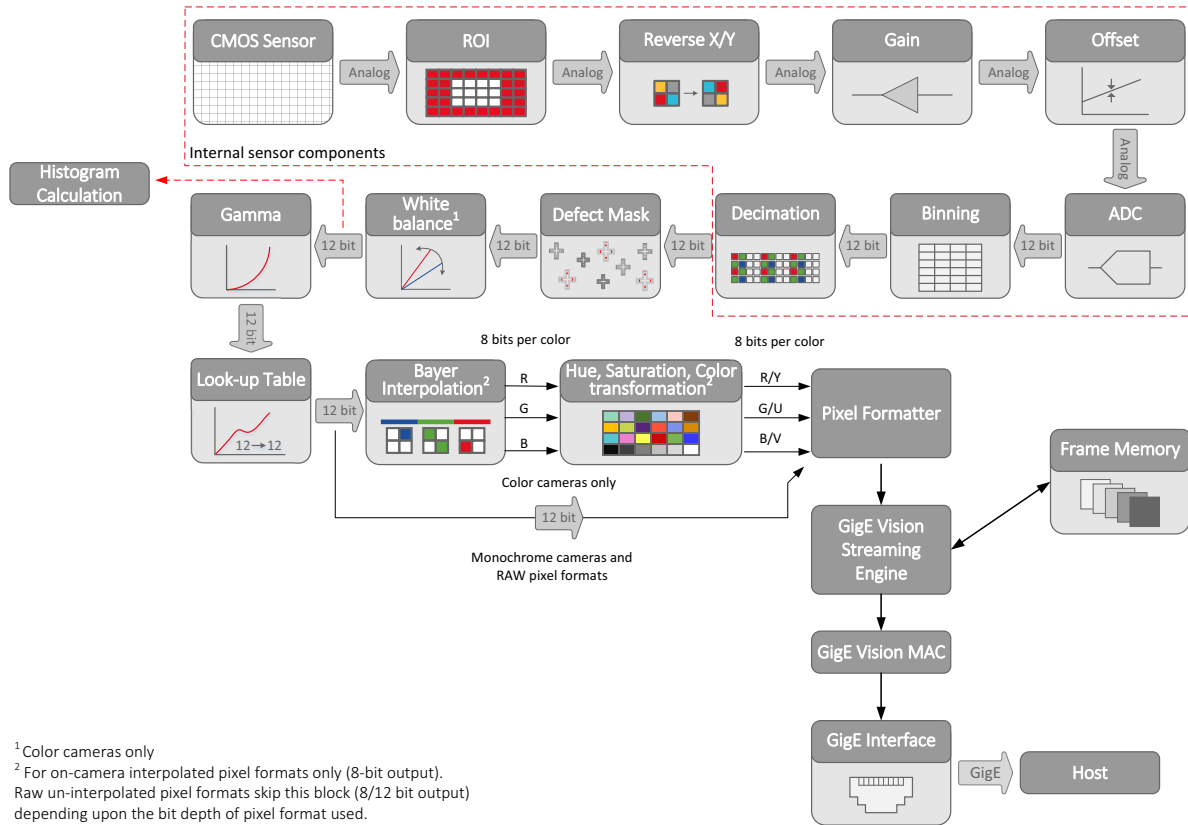


Figure 77: Mako G-503 series image data flow

## Color interpolation (Bayer demosaicing)

The color sensors capture the color information via so-called primary color (R-G-B) filters placed over the individual pixels in a Bayer mosaic layout. An effective Bayer to RGB color interpolation already takes place in all Mako G color version cameras.

In color interpolation a red, green, or blue value is determined for each pixel. A proprietary Bayer demosaicing algorithm is used for this interpolation, optimized for both sharpness of contours as well as reduction of false edge coloring.

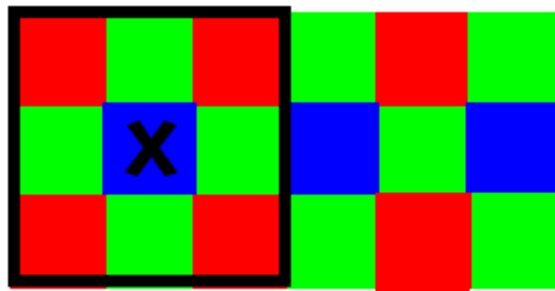


Figure 78: Bayer demosaicing (example of 3 × 3 matrix)

Color processing can be bypassed by using the RAW image transfer.

RAW mode is primarily used to:

- save bandwidths on the Gigabit Ethernet network
- achieve higher frame rates
- use different Bayer demosaicing algorithms on the host computer
  - for Mako G, the first pixel of the sensor is red



When the host computer does not perform Bayer to RGB post-processing, the monochrome image is superimposed with a checkerboard pattern.



In color interpolation a red, green, or blue value is determined for each pixel (P1= first pixel; P2= second pixel). Only two lines are needed for this interpolation:

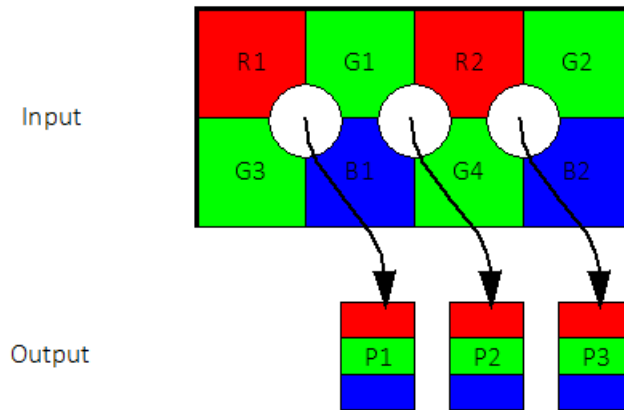


Figure 79: Bayer demosaicing (interpolation)


$$\begin{array}{lll}
 P1_{\text{red}} = R1 & P2_{\text{red}} = R2 & P3_{\text{red}} = R2 \\
 P1_{\text{green}} = \frac{G1 + G3}{2} & P2_{\text{green}} = \frac{G1 + G4}{2} & P3_{\text{green}} = \frac{G2 + G4}{2} \\
 P1_{\text{blue}} = B1 & P2_{\text{blue}} = B1 & P3_{\text{blue}} = B2
 \end{array}$$

Figure 80: Bayer demosaicing



- Note that on the color camera, an incorrectly colored border of one or two pixel wide forms on the left and right image borders. This is also a consequence of Bayer demosaicing as the image width displayed on the color camera is not scaled down.
- Using a ROI, **x** and **y** resolutions must be even-numbered.

# Cleaning optical components



This chapter describes safety instructions and cautions for cleaning lenses, optical filters, and sensors.



Read these instructions before you contact Allied Vision or your Allied Vision distribution partner for assistance.

Contact Allied Vision or your Allied Vision distribution partner if you are not familiar with the procedures described in this chapter.



#### NOTICE

As monochrome and NIR models do not have an optical filter, always attach a dust cap when a lens is not attached to minimize the possibility of contaminants falling on the sensor surface.

## Keeping optical components clean

The best way to ensure the camera remains clean is to avoid penetration of foreign substances into the camera.

When screwing or unscrewing the camera lens or dust cap, hold the camera with the lens mount opening towards the floor. This minimizes the possibility of any contaminants falling on the glass surface. Always store cameras and lenses with dust-caps on.



*Figure 81: Illustration of camera orientation when removing lens or dust cap*

## Identifying impurities

If you observe any image artifacts in your video preview of your Mako G camera you may have impurities either on the lens, optical filter, or on the sensor surface. Every Mako G camera is cleaned prior to sealing and shipment; however, impurities may develop due to handling or unclean environments.

As shown in the following figure, impurities (dust, particles, or fluids) on the sensor or optical components appear as a dark area, patch or spot on the image and remain fixed in the preview window while you rotate the camera over the target.

Don't confuse this with a pixel defect which appears as a distinct point. Particles can either rest loosely or can be more or less stuck to the optical surface.

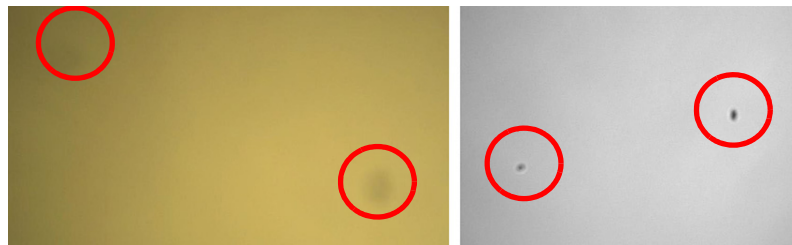


Figure 82: Image with tiny dust on the filter (left) and dust on the sensor (right)

## Locating impurities

Before you dismount the lens you should find out if the impurity is on the optical filter, lens, or sensor.

1. Start acquiring a uniform image (for example a white sheet of paper) with the camera.
2. To identify the affected surface, move the suspected optical component and see if the contamination follows this movement.
  - a. If you move only the lens (not the camera) and the impurity moves as well, the impurity is on the lens.

- b. If you move the optical filter window and the impurity moves as well, the impurity is on the optical filter. Carefully remove the optical filter and clean it on both sides using the techniques explained in the next section.



3. If the impurity is neither on the lens nor the optical filter, it is probably on the sensor.


**NOTICE**
**Removing optical filter**

To remove the optical filter use the special tool (Allied Vision order code 3851; 22 mm filter).

## Removing the IR cut filter

Standard Mako G-507C models with SN  $\geq$  536883430 and all other standard Mako G models with SN  $\geq$  536884750 are equipped with a 22 mm diameter IR cut filter. Filters can be removed with the E9020001 filter removal tool.

For other Mako G cameras, see the following table.

Model	Serial number	Filter glass diameter	Removal tool	Pin distance
Mako G-507C	$\geq$ 536883430	22 mm	E9020001	21 mm
	$<$ 536883430	16 mm	E9020001	21 mm
	$<$ 536883430	22 mm	3851	22 mm
Other models	$\geq$ 536884750	22 mm	E9020001	21 mm
	$<$ 536884750	16 mm	E9020001	21 mm
	$<$ 536884750	22 mm	3851	22 mm

Table 59: Filter removal tools for Mako G cameras




Figure 83: Pin distance for E9020001 filter removal tool

## Materials for cleaning optical components



Use only these cleaning materials for optical components

- Optic approved lens cotton, cloth, or tissue that is chemically pure and free from silicones and other additives.
- Optic approved low residue cleaning liquid.



### NOTICE

Never use these cleaning materials for optical components:

- Dry swabs or tissue may cause scratches.
- Metal tools may cause scratches.
- Disposable cotton cosmetic swabs may contain contaminants harmful to optical glass.
- Cosmetic cotton may cause scratches or get caught in small gaps.
- Consumer eyeglass cleaning cloths may be pretreated with silicone harmful to optical glass.
- Aggressive cleaners like benzene, acetone, or spirits may damage the surface.



### Optical cleaning liquid material safety data sheets

Read the MSDS for the optical cleaning liquid before cleaning your camera or optics. The MSDS provides important information including hazard identification, first aid measures, handling and storage, and PPE.

# Cleaning Instructions



Workplace conditions:

- Perform all cleaning operations (lenses, optical filter, and sensor) in a dust-free clean-room.
- Avoid touching the optical components with your fingers or any hard material.
- Nitrile cleanroom gloves or powder free latex gloves are recommended to maintain low particulate levels.
- Use an ESD mat to prevent damage from an electrostatic discharge.

1. Unplug the camera from any power supply before cleaning.
2. Apply a small amount of cleaning liquid to a new lens cleaning cotton, cloth, or tissue. The cotton, cloth, or lens tissue should be moist, but not dripping.



3. Hold the camera sensor diagonally upwards. Ensure that the camera is away from your body to prevent particles like skin flakes from falling on the sensor.
4. Wipe the glass surface with a spiral motion from the center to the rim. Normally, several spiral wipes are recommended. Wipe only on glass avoiding contact to metal surfaces, because microscopic dirt could be released and could cause scratches on the glass.
5. When you have finished cleaning, examine the surface in a strong light. Take an out-of-focus picture of a flat, illuminated surface to see if any dirt or dust remains.
6. If dust spots remain, repeat this procedure using new clean lens tissue (as previously described).



If you notice that the camera lens or sensor is not clean after attempting to clean twice, or if you have any questions regarding cleaning your camera, contact your Allied Vision distribution partner.

## Cleaning with compressed air

We do not recommend cleaning Mako G cameras with compressed air.

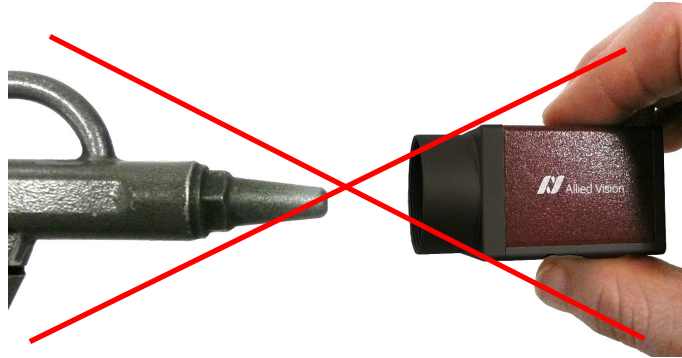


Figure 84: Cleaning with compressed air is not recommended



### NOTICE

#### Possible material damage

- Compressed air at high pressure or shorter operating distances may push dust into the camera or lens and physically damage the camera, sensor, or optical components.
- Propellant from non-optic approved compressed air products may leave a residue on the camera or lens and may physically damage the camera, sensor, or optical components.
- Compressed air may contain oil or moisture that could contaminate or damage the optical components.
- Use an air blower or compressed air only if you are familiar with cleaning a camera using this method.

If you want to clean your camera with compressed air despite of all the warnings:

- Use an optic approved compressed air product or compressor.
- Use an anti-static ionizer attachment to reduce the risk of static-caused damage.
- Use a filter to remove moisture and oil from the air.
- Use short directed bursts of air to remove impurities.



#### Compressed air pressure and operating distance

- Keep the compressed air pressure at a moderate strength only. Pressure at the nozzle should be less than 100 kPa.
- Operating distance from the camera should be 5 to 30 cm.



# Firmware update



This chapter includes instruction on how to update the firmware on your Mako G camera.



If new firmware contains a new feature or control, saved camera UserSets or ConfigFiles are invalidated and erased!

Before loading new firmware, backup your current camera settings.

- **Vimba Viewer:** select the **Save Camera Settings** icon from the **Cameras** window to export the camera settings file (XML) to the host computer.
- **GigE SampleViewer:** select the **Disk** icon from the **Cameras** window to export camera settings file (XML) to the host computer.




### NOTICE


Do not unplug the GigE cable or camera power supply during the update procedure.

## Updating the firmware on your Mako G camera


Step 1: Launch the **Firmware Loader**.

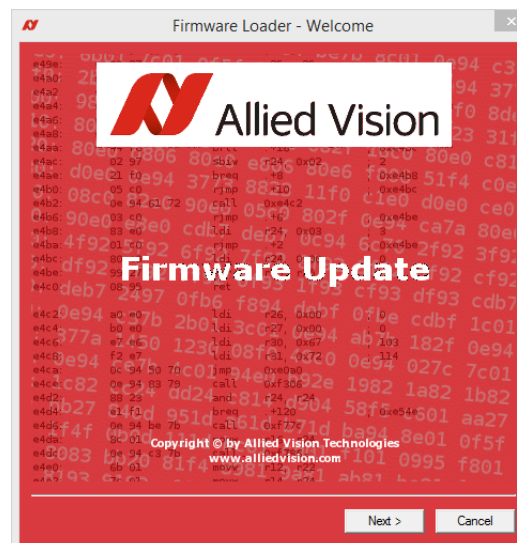

Step 2: Click **Next**. The **Firmware Loader** displays a list of firmware included in the package

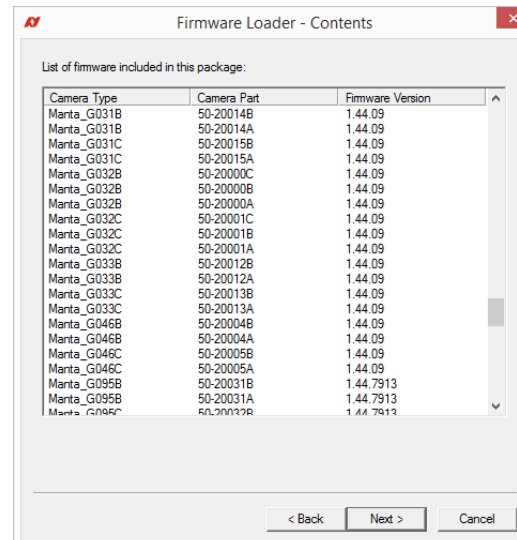


Step 3: Click **Next**. You can select your camera model on this page.

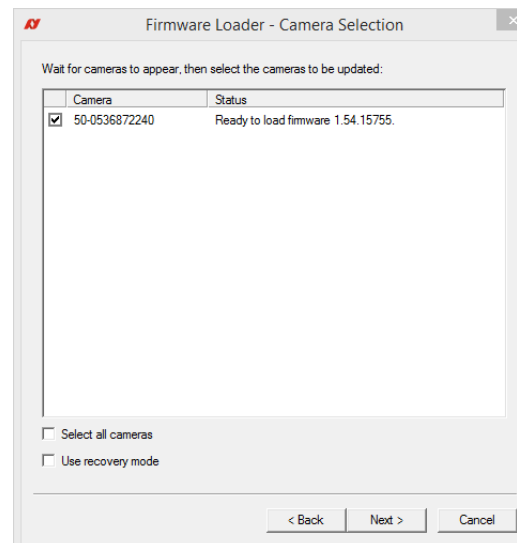


Select the **Use recovery mode** check box if the connected GigE camera is not found by the firmware loader, or if the GigE camera is listed as unavailable. When selected, power cycle the camera to enter the **Boot Loader** mode.


Step 4: Click **Next**.

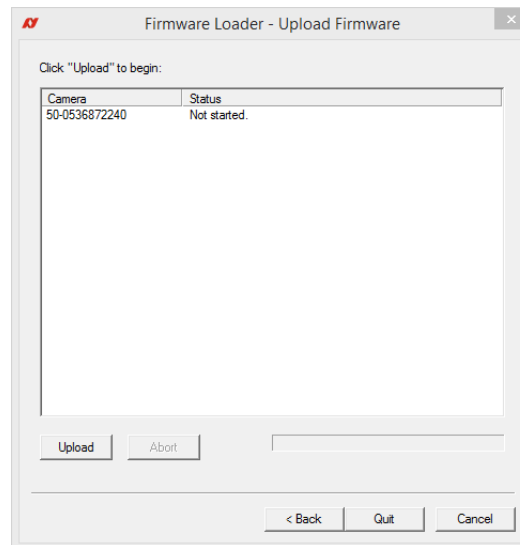

Step 5: Click **Upload** to start the update. The existing firmware is erased and the new firmware is uploaded to the camera.

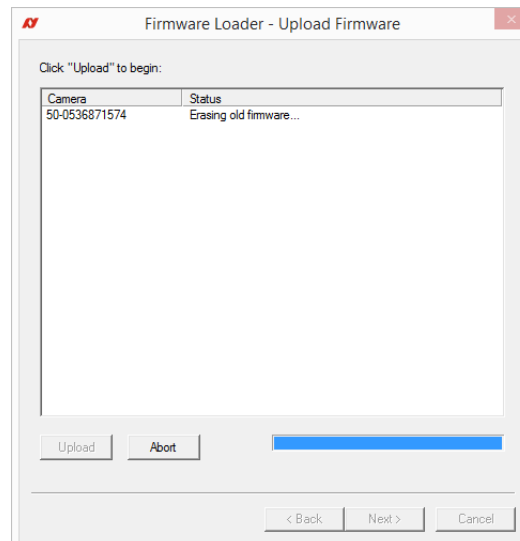

Step 6: The **Firmware Loader** displays a success status upon completion. Click **Quit** to exit the loader.

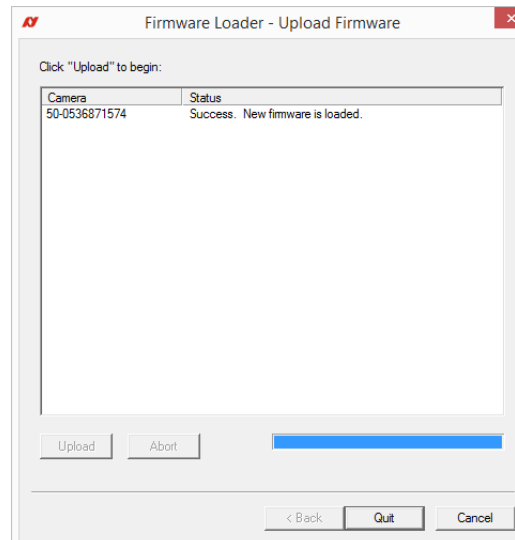

You should always power cycle the camera after a firmware upgrade or downgrade.

# Index

<b>A</b>	
Acquisition stream .....	141
<b>B</b>	
Bandwidth	
RAW-mode .....	152
BAYER mosaic .....	152
BAYER to RGB	
Color interpretation .....	152
<b>C</b>	
Camera lenses .....	125
Category 6 .....	45
Cleaning	
Compressed air .....	160
Instructions .....	159
Locating impurities .....	156
Materials .....	158
Color interpolation	
Color information .....	152
Compliance	
USA .....	32
Control signals	
Input block diagram .....	140
Copyright .....	34
Cross section	
C-Mount .....	121
CS-Mount .....	121
<b>D</b>	
Dimensional mount adjustment .....	123
Dimensions .....	52
Duration of sensor exposure .....	141
<b>E</b>	
electrostatic discharge .....	29
Environmental specifications .....	37, 46
ESD .....	29, 37
External trigger .....	141
<b>F</b>	
Feature comparison .....	116
Focal length .....	125
Frame memory .....	52
Frame readout .....	141
Frame trigger .....	141
<b>G</b>	
General purpose output .....	140
General safety notes .....	34
GenICam .....	51
Gigabit Ethernet	
Cable type .....	135
IEEE 802.3 1000BASE-T .....	135
GigE Vision .....	51
GPO .....	140
<b>H</b>	
heat dissipation .....	35
<b>I</b>	
I/O	
Connector pin assignment .....	135
Control signals .....	140
IEEE 802.3af-2003 .....	135
Input block diagram .....	140
Interline boundary .....	144
Interpolation	
BAYER demosaicing .....	153
BAYER to RGB .....	152
Isolated out power .....	139
<b>L</b>	
lenses	
maximum protrusion .....	38
Logic trigger .....	141
<b>M</b>	
Mako G	
Back panel .....	134
Status LEDs .....	134

Tripod adapter .....	119	camera power .....	37
Manual conventions		electrical connections .....	37
Styles .....	28	heat dissipation .....	35
Symbols .....	28	lens mounts .....	35
Mass .....	52	maximum protrusion .....	38
Minimum pulse width .....	138	optical components .....	38
		sensor .....	38
<b>O</b>		sensor handling .....	38
Output		Sensor position accuracy .....	120
block diagram .....	138	Sensor row readout cycles .....	143
switching times .....	139	Specifications .....	51
Output current .....	37, 46	Status LEDs .....	134
Output signal .....	140	SyncIn1	
Acquiring .....	141	External trigger .....	141
AcquisitionTriggerReady .....	140		
Exposing .....	141	<b>T</b>	
FrameReadout .....	141	Trigger	
FrameTrigger .....	141	Definitions .....	143
FrameTriggerReady .....	141	Exposure .....	143
Imaging .....	141	Exposure start delay .....	143
Strobe1 .....	141	Idle .....	143
SyncIn1 .....	141	Imaging .....	143
SyncOutGpoLevels .....	140	Interline time .....	143
Output switching		Logic trigger .....	143
parameters .....	139	Propagation delay .....	143
		Readout .....	143
<b>P</b>		Registered exposure time .....	143
PoE		Rules .....	143
IEEE 802.3af-2003 .....	135	Time delay .....	143
Power		Timing diagram .....	142
DC .....	46	Tpd .....	143
		Trigger jitter .....	143
<b>R</b>		Trigger latency .....	143
RAW mode .....	152	Trigger ready .....	143
ROI measurements .....	52	User trigger .....	143
		Tripod adapter .....	119
<b>S</b>			
safety .....	2, 4, 13, 28	<b>V</b>	
		Voltage .....	37, 46