



High Performance Cooled CCD Camera System ALTA U3041

The Alta U3041 uses a very large format 4-megapixel back-illuminated sensor, ideal for applications requiring large field of view, such as sky surveys and radiology.

Imaging Area of
CCD


- 2048 x 2048 array, 15 x 15 micron pixels
- 16-bit digitization at 700 kHz; 12 bits at 2 MHz
- 32 Mbyte camera memory
- USB 2.0 interface: no plug in cards or external controllers
- Programmable, intelligent cooling to 45°C below ambient (D07 housing) / 60-65°C below ambient (D09 housing)
- Binning up to 8 Horizontal x 2048 Vertical
- Subarray readout and fast sequencing modes
- Programmable fan speed for low / zero vibration
- Two serial port outputs for control of peripheral devices
- General purpose programmable I/O port
- External triggering and strobe controls
- ActiveX drivers included with every system
- Field upgradeable firmware
- Fused silica windows
- Runs from single 12V supply with input voltage monitor
- Compact enclosure
- Programmable status indicators

- Astronomy
- Radiology
- Non-destructive testing



CCD SPECIFICATIONS

CCD	Fairchild 3041
Array Size (pixels)	2048 x 2048
Pixel Size	15 x 15 microns
Imaging Area	30.7 x 30.7 mm (944 mm ²)
Imaging Diagonal	43.4 mm
Video Imager Size	2.7"
Linear Full Well (typical)	100K electrons
Dynamic Range	82 dB
QE at 400 nm	74%
Peak QE (720 nm)	96%

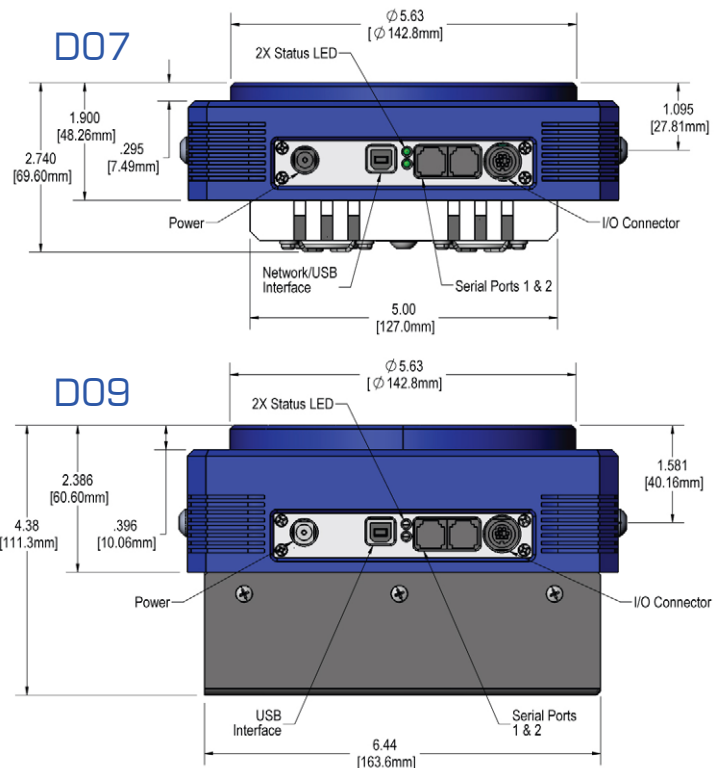

For complete CCD specifications, including cosmetic grading, see data sheet from manufacturer.



151 N. Sunrise Ste 902
Roseville CA 95661 USA
tel 916 218 7450
fax 916 218 7451
www.ccd.com




ALTA U3041

Camera System Performance

PC Interface	USB 2.0
Max. Cable Length	5 meters between hubs; 5 hubs maximum (max. total of 30m)
Digital Resolution	16 bits at 700 kHz; 12 bits at 2 MHz.
System Noise (typical)	10 e ⁻ RMS
Pixel Binning	1x1 to 8 x 2048 on-chip
Exposure Time	30 milliseconds to 183 minutes (2.56 microsecond increments)
Image Sequencing	1 to 65535 image sequences under software control
Frame Sizes	Full frame, subframe, focus mode
Cooling (typical)	Thermoelectric cooler with forced air. Maximum cooling 45°C below ambient temperature (60-65°C below ambient with High Cooling D09 housing)
Dark Current (typical)	<1 e ⁻ /pixel/sec (-25°C). <0.15 eps for High Cooling D09 housing.
Temperature Stability	± 0.1°C
Camera Head	D07. Aluminum, hard blue anodized. 7" x 7" x 2.55" (17.8 x 17.8 x 6.48 cm) Optional High Cooling housing: D09. 7" x 7" x 3.25" (17.8 x 17.8 x 8.9 cm) Weight: 4.2 lb. (1.9 kg)
Mounting	5.125" bolt circle. Optional Nikon F-mount or Canon FD mount.
Back Focal Distance	1.025" (2.60cm). Optional low profile housing D11 (no shutter): 0.61" (1.56 cm) Optional D09: 1.40" (3.56 cm) [optical]
Operating Environment	-22° to 27°C. Relative humidity: 10 to 90% non-condensing.
Cable Length	Standard: 15 ft (4.5m)
Power	40W maximum power with shutter open and cooling maximum. AC/DC "brick" supply with int'l AC input plug (100-240V, 50-60 Hz). Alternate 12V input from user's source.
Shutter	Melles Griot 63mm (D07 and D09). D11 Low profile: no shutter.
Remote Triggering	LVTTL input allows exposure to start within 25 microseconds of rising edge of trigger

CCD SENSITIVITY

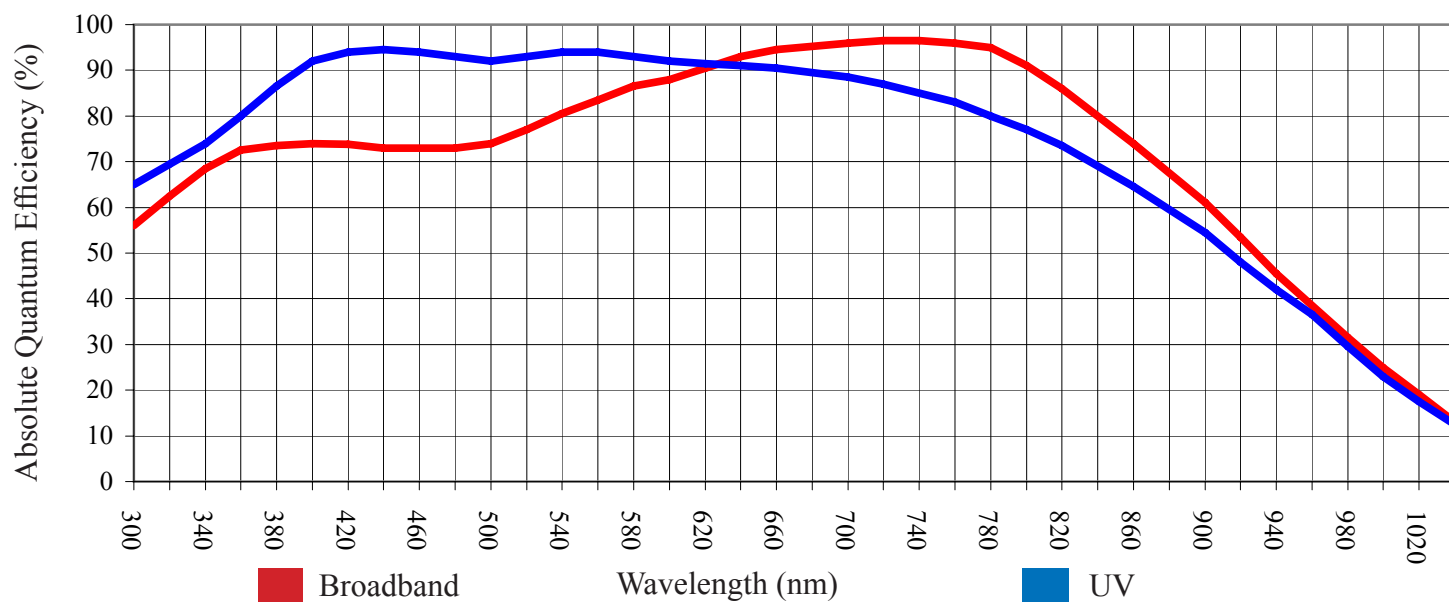

151 N. Sunrise Ste 902
 Roseville CA 95661 USA
 tel 916 218 7450
 fax 916 218 7451
www.ccd.com