



## LENS OB-SWIR75/4 – P/N C0415

### General Description

This family of high resolution SWIR lenses image from 0.9 - 3.0  $\mu\text{m}$  making them especially well-suited for PCB inspection, specialty laser applications, surveillance and alignment and tracking.

A high F/N and excellent transmission characteristics allow superior imaging in these wavelengths of interest.



#### Optical and mechanical parameters

Focal length	75 mm	N. of elements	5
Image format (diagonal)	20.5 mm	Dimensions	Dia 80 x 60 mm
F.O.V. (diagonal)	15.5 degrees	Weight	0.7 Kg
Max aperture	F/N = 4 (fixed)	<b>Options</b>	
Object format	N.A.	Focus motorized	Upon request
Min working distance	2000 mm	Iris motorized	Upon request
Zoom value	N.A.	Zoom motorized	N.A.
Focus	Manual	Other mount type	Upon request
Iris	Optional Min F/N=22(if iris)		

P/N	wavelength range	mount type	note
C0415.001	900-1700 nm	Canon	Without iris diaphragm
C0415.051	900-1700 nm	Canon	With iris diaphragm
C0415.002	900-1700 nm	Nikon	Without iris diaphragm
C0415.052	900-1700 nm	Nikon	With iris diaphragm
C0415.003	900-1700 nm	M42 Screw	Without iris diaphragm
C0415.053	900-1700 nm	M42 Screw	With iris diaphragm


## LENS OB-SWIR75/4 – P/N C0415

1 September 2009, Rev 3 Page 2 of 4

P/N	wavelength range	mount type	note
C0415.005	1700-2300 nm	Canon	Without iris diaphragm
C0415.055	1700-2300 nm	Canon	With iris diaphragm
C0415.006	1700-2300 nm	Nikon	Without iris diaphragm
C0415.056	1700-2300 nm	Nikon	With iris diaphragm
C0415.007	1700-2300 nm	M42 Screw	Without iris diaphragm
C0415.057	1700-2300 nm	M42 Screw	With iris diaphragm
C0415.010	900-2300 nm	Canon	Without iris diaphragm
C0415.060	900-2300 nm	Canon	With iris diaphragm
C0415.011	900-2300 nm	Nikon	Without iris diaphragm
C0415.061	900-2300 nm	Nikon	With iris diaphragm
C0415.012	900-2300 nm	M42 Screw	Without iris diaphragm
C0415.062	900-2300 nm	M42 Screw	With iris diaphragm

### MTF, Field Curvature, Distortion and Transmission from 900 to 1700 nm

The calculated MTF values are displayed below and are verified at the maximum F/N and best focus plane. The colored lines represent the F.O.V, starting in the center (0%) to the corner (100%).

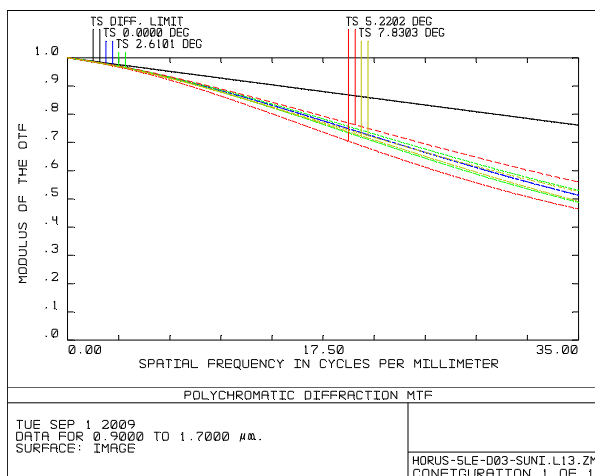



### Optical parameters for wavelength range 0.9 – 1.7 μm

Resolution	MTF > 50% @ 35lp/mm
Distortion	< 2%
Average axial chromatic aberration	< 0.0614 mm

Transmission	> 92%
Antireflection Coating	$R \leq 1\%$
Vignetting	0%




## LENS OB-SWIR75/4 – P/N C0415

1 September 2009, Rev 3 Page 3 of 4

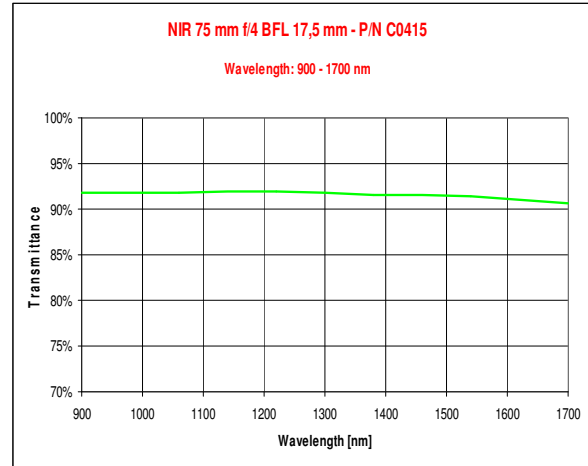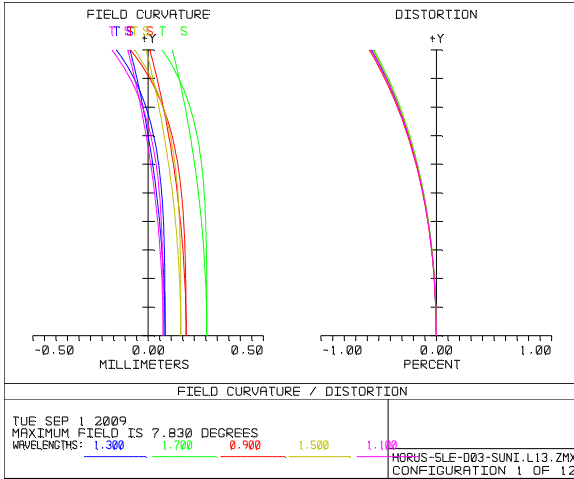

### MTF, Field Curvature, Distortion and Transmission from 1700 to 2300 nm

The calculated MTF values are displayed below and are verified at the maximum F/N and the best focus plane. The colored lines represent the F.O.V. starting in the center (0%) to the corner (100%)

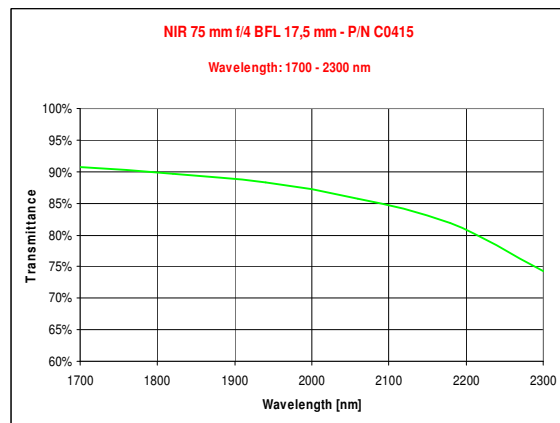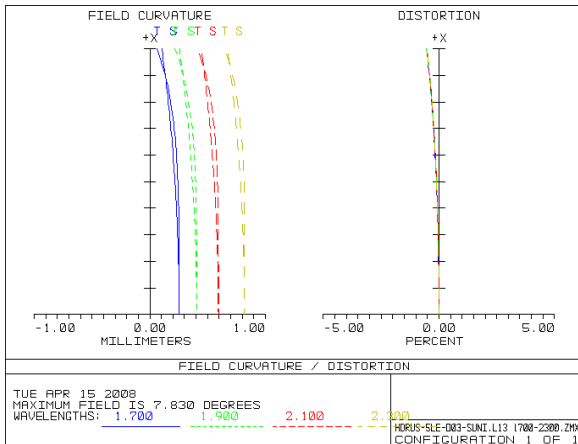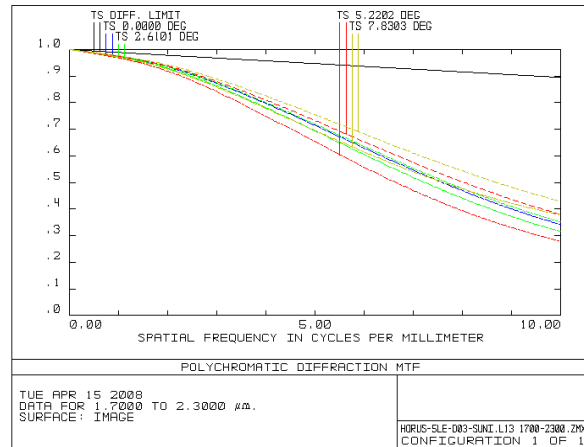

## LENS OB-SWIR75/4 – P/N C0415



1 September 2009, Rev 3 Page 4 of 4

### Optical parameters for wavelength range 1.7 – 2.3 $\mu\text{m}$

Resolution	MTF > 30%@10lp/mm	Transmission	> 73%
Distortion	< 2%	Antireflection Coating	$R \leq 1\%$

### MTF, Field Curvature, Distortion and Transmission from 900 to 2300 nm

The calculated MTF values are displayed below and are verified at the maximum F/N and the best focus plane. The colored lines represent the F.O.V. starting in the center (0%) to the corner (100%)

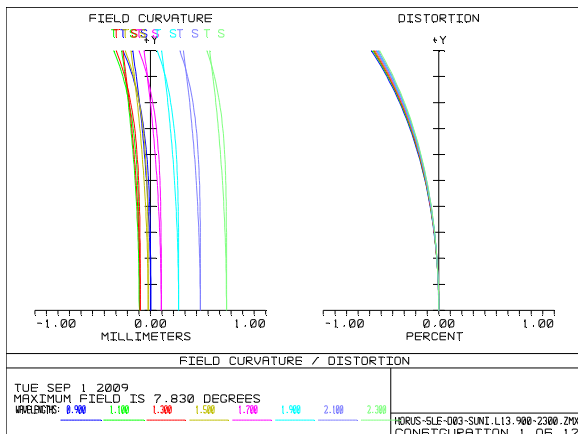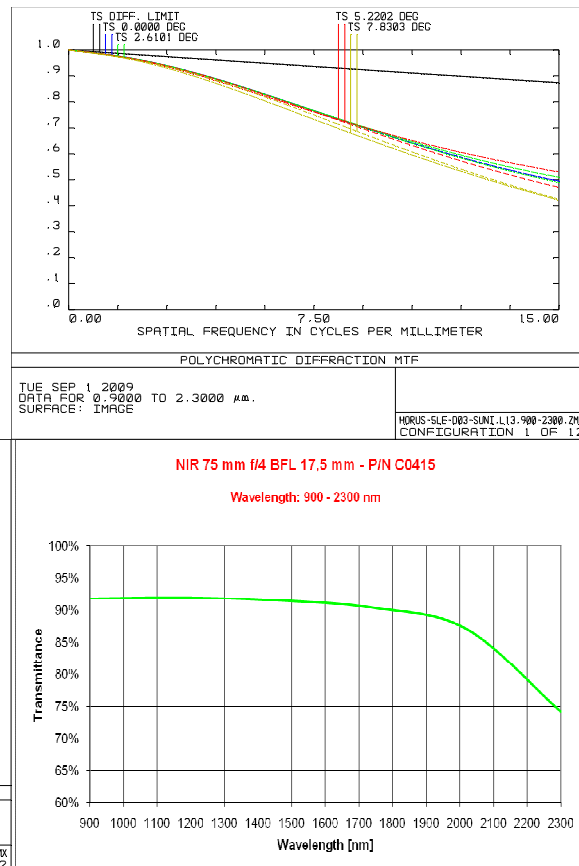

### Optical parameters for wavelength range 0.9 – 2.3 $\mu\text{m}$

Resolution	MTF > 45%@15lp/mm	Transmission	> 73%
Distortion	< 2%	Antireflection Coating	$R \leq 1\%$